



(51) International Patent Classification:
E03C 1/23 (2006.01)

(21) International Application Number:
PCT/DK2010/050006

(22) International Filing Date:
15 January 2010 (15.01.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PA 2009 00064 16 January 2009 (16.01.2009) DK

(72) Inventor; and

(71) Applicant : GELLERT, Jimmi [DK/DK]; L.I. Brandes
Allé 14, KLD.TV., DK-1956 Frederiksberg C (DK).

(74) Agent: HØIBERG A/S; St. Kongensgade 59A, DK-1264
Copenhagen K (DK).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,

KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
11 November 2010

(54) Title: DRAIN VALVE ASSEMBLY

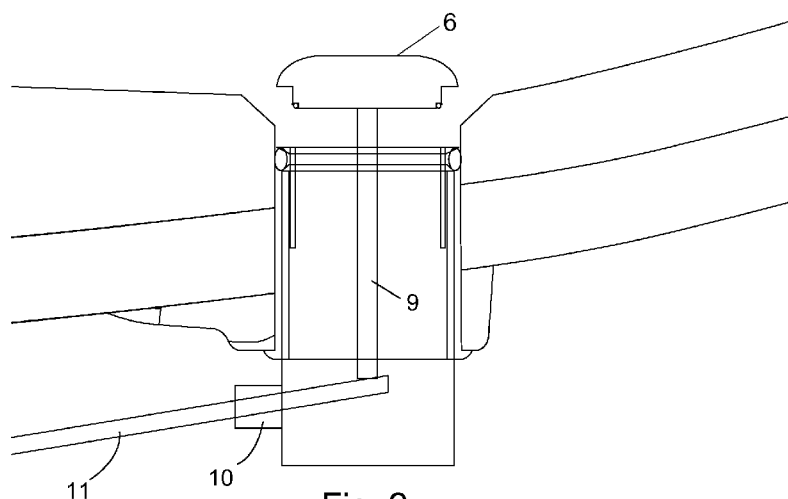


Fig. 2

(57) Abstract: The present invention concerns a drain valve assembly with a pop-up drain stopper for a drain opening. The drain valve assembly has an improved sealing mechanism whereby the drain valve assembly may be easily installed and, in addition, the interface between the drain valve assembly and the drain opening may be easily cleaned.