




[図1]

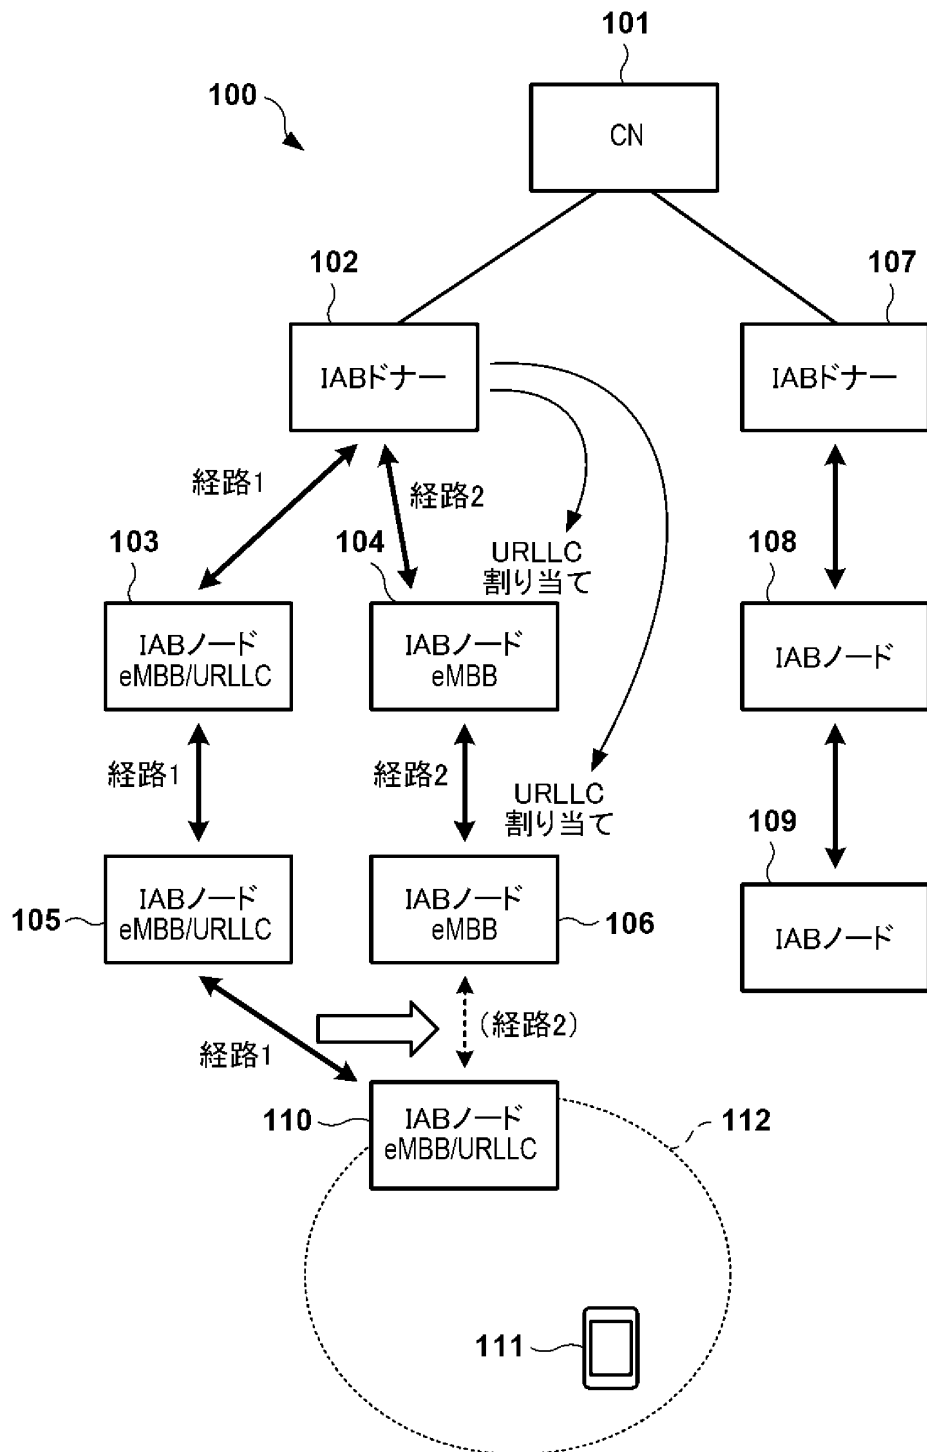


[図2]

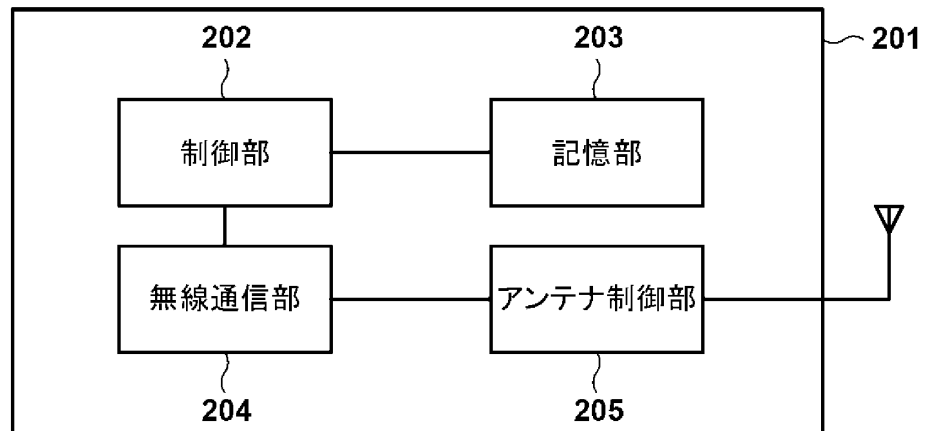

[図3]

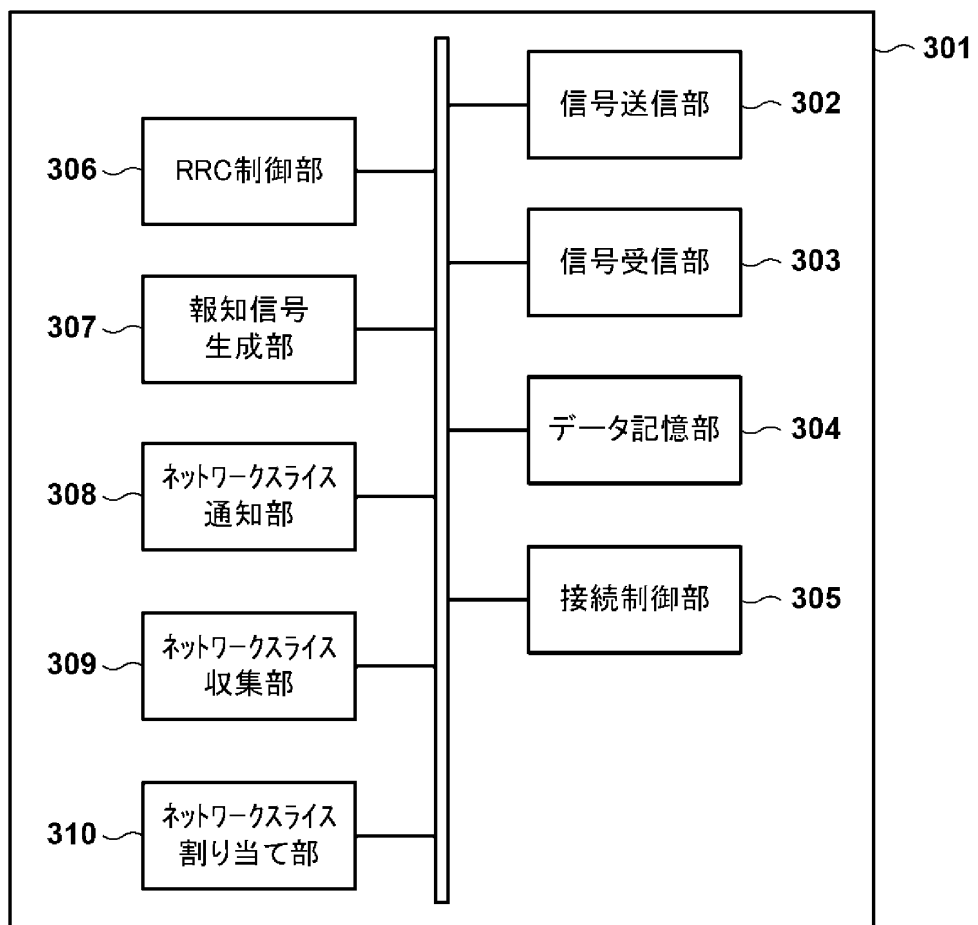

[図4]

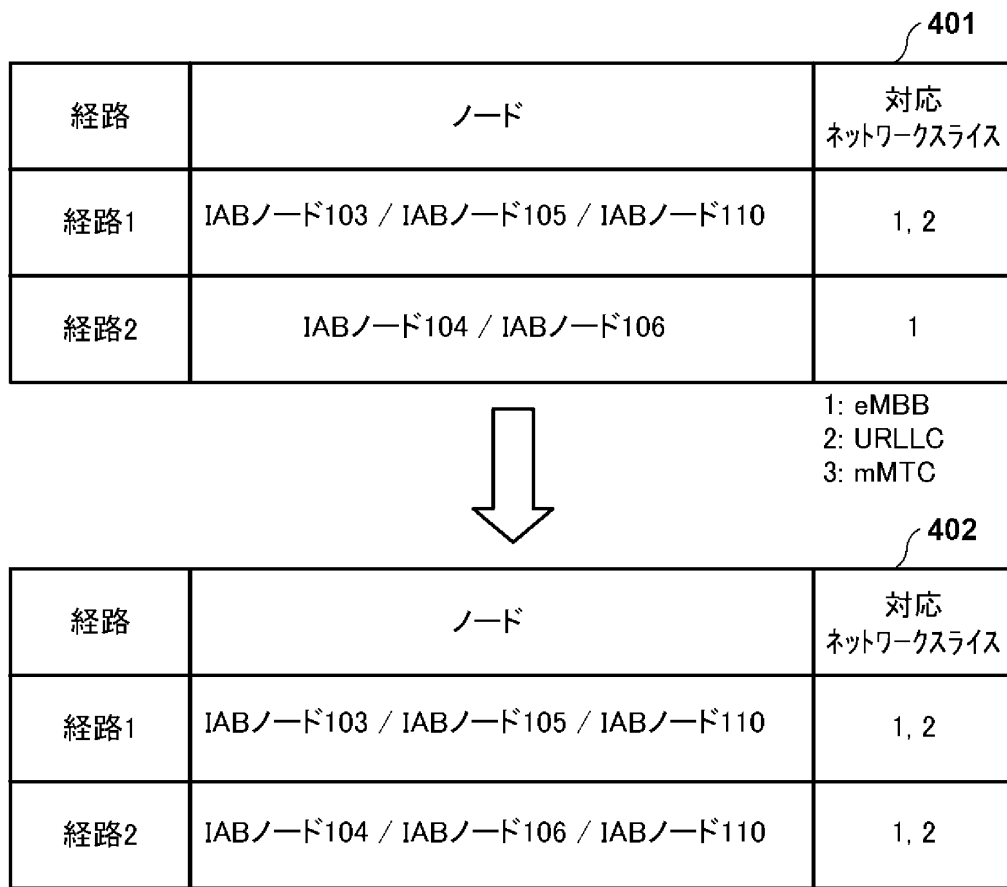


[図5A]

SST (8 bit)	SD (24 bit)
----------------	----------------


[図5B]


Slice Allocate (8 bit) ON = 1 / OFF = 0	SST (8 bit)	SD (24 bit)
---	----------------	----------------

[図6]

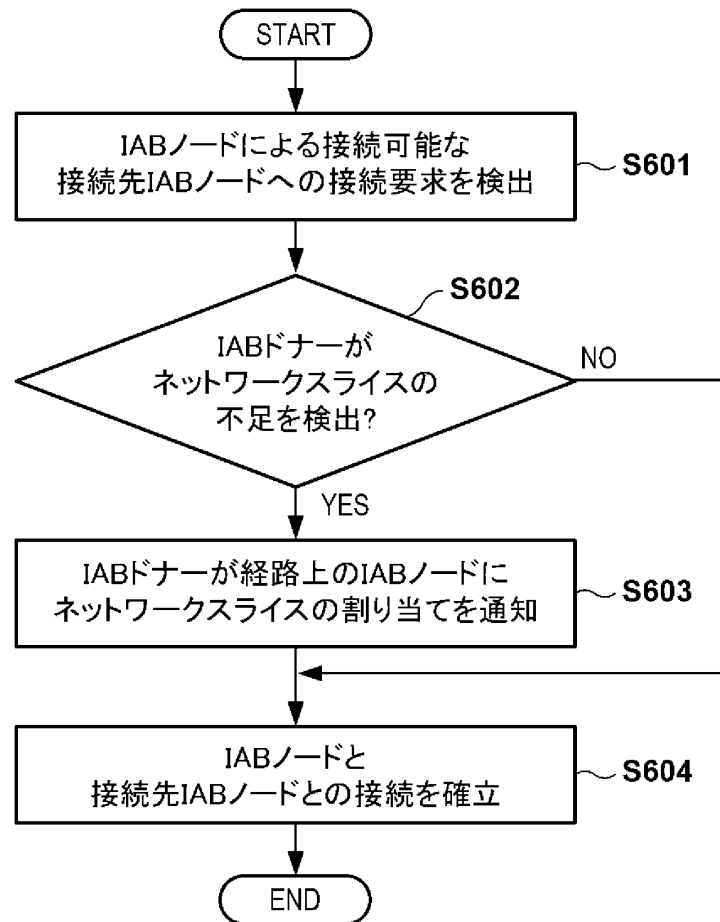

[図7]

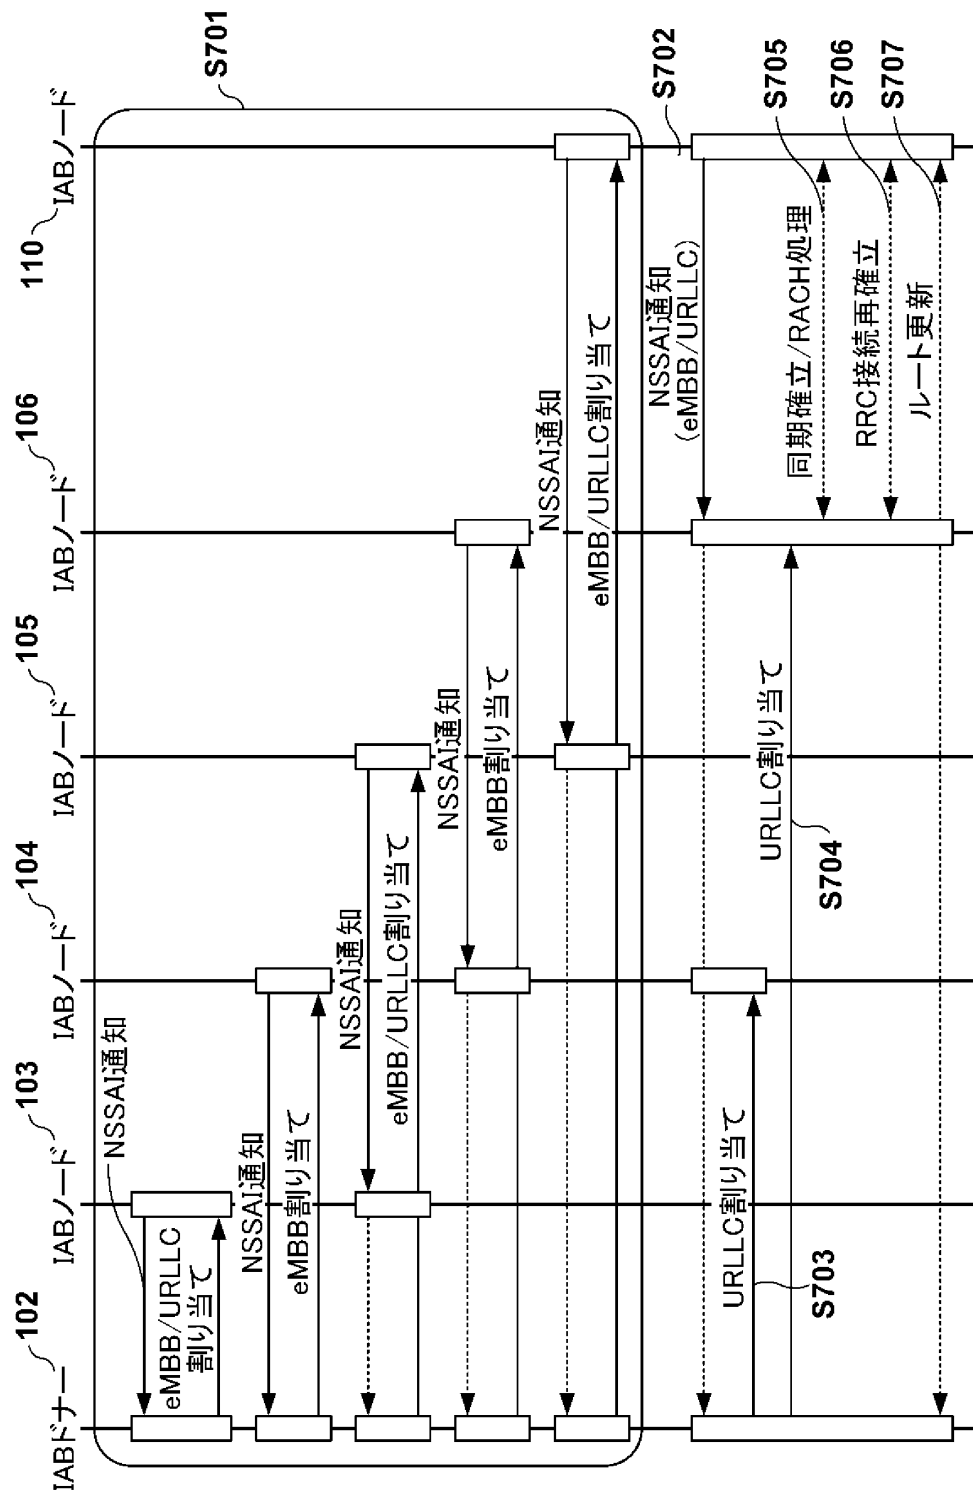

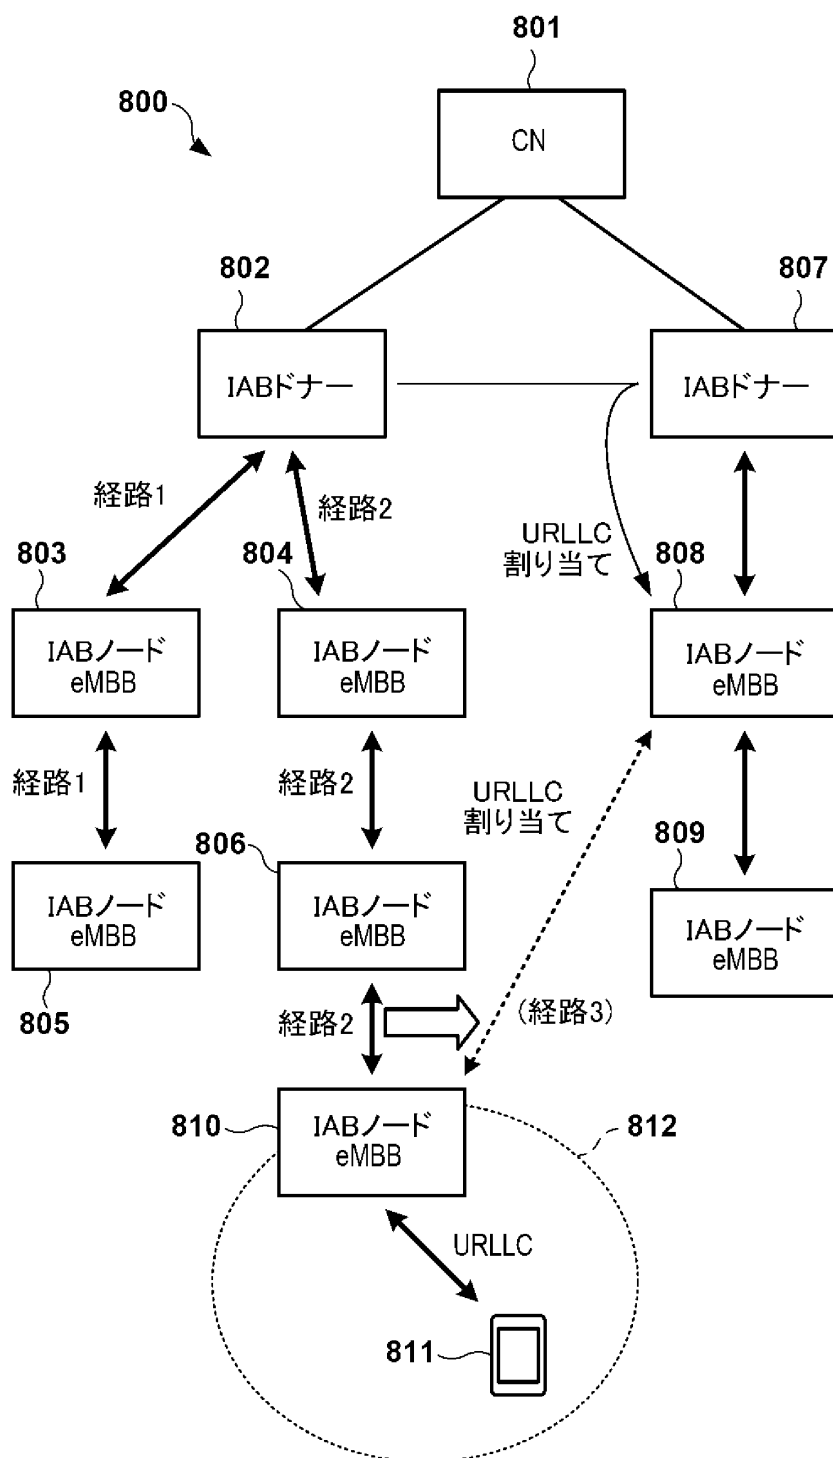

[図9]

901		
経路	ノード	対応 ネットワークスライス
経路1	IABノード803 / IABノード805	1
経路2	IABノード804 / IABノード806 / IABノード810	1

1: eMBB
2: URLLC
3: mMTC

902

経路	ノード	対応 ネットワークスライス
経路1	IABノード803 / IABノード805	1
経路2	IABノード804 / IABノード806	1
経路3	IABノード808 / IABノード810	1, 2

[図10]

