



(51) International Patent Classification:

A61M 5/32 (2006.01) *A61M 5/28* (2006.01)
A61M 5/50 (2006.01)

(21) International Application Number:

PCT/EP2011/060319

(22) International Filing Date:

21 June 2011 (21.06.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10168317.5 2 July 2010 (02.07.2010) EP

(71) Applicant (for all designated States except US):
SANOFI-AVENTIS DEUTSCHLAND GMBH
[DE/DE]; Brüningstraße 50, 65929 Frankfurt (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ROBERTS, Gareth**
[GB/GB]; Glendale, Pen-y-cae Road, Ruabon, Wrexham
LL14 6EB (GB). **WARD, Chris** [GB/GB]; 31 Princes
Avenue, Prestatyn, Denbighshire LL19 8RW (GB). **EK-**
MAN, Matthew [GB/GB]; 59 Ecton Avenue, Cheshire,
Macclesfield, Cheshire SK10 1RD (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: SAFETY DEVICE FOR A PRE-FILLED SYRINGE AND INJECTION DEVICE

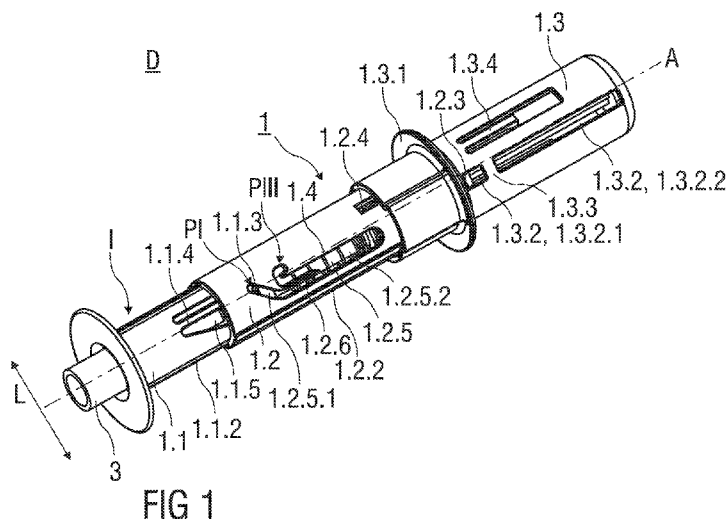

(57) Abstract: According to the invention, a safety device (1) for a pre-filled syringe (2) comprises a hollow support body (1.2) for mounting the pre-filled syringe (2) therein, a hollow needle shield (1.1) that is slidable relative to the support body (1.2) and guiding means for guiding the movement of the needle shield (1.1) relative to the support body (1.2). The guiding means comprise a flexible arm (1.1.4) with a guide pin (1.1.3), a guide track (1.2.5) and a separating wall (1.2.6). The guide pin (1.1.3) extends from the flexible arm (1.1.4) in a radial direction, and protrudes into the guide track (1.2.5). The separating wall (1.2.6) extends into the guide track (1.2.5) in a direction parallel to a central axis (A) of the safety device (1). When the needle shield (1.1) is slid relative to the support body (1.2) the guide pin (1.1.3) moves along the guide track (1.2.5) to deflect the flexible arm (1.1.4) in a lateral direction (L) perpendicular to the central axis (A) and the movement of the guide pin (1.1.3) along the guide track (1.2.5) is guided by the interplay of the flexible arm (1.1.4) and the separating wall (1.2.6).