2000034 7-5
IPC
COPY

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G11B 23/00 — A2

(11) International Publication Number: WO 99/08274

(43) International Publication Date: 18 February 1999 (18.02.99)

(21) International Application Number: PCT/JP98/03405

(22) International Filing Date: 30 July 1998 (30.07.98)

(30) Priority Data:
9/230416 12 August 1997 (12.08.97) JP
9/273541 19 September 1997 (19.09.97) JP

(71) Applicant *(for all designated States except US)*: KABUSHIKI KAISHA KENWOOD [JP/JP]; 14–6, Dougenzaka 1–chome, Shibuya–ku, Tokyo 150–0043 (JP).


(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: SASADA, Takeharu [JP/JP]; Room A101, 860, Yokokawa–cyo, Hachiouji–shi, Tokyo 192–0823 (JP). IMAI, Tsutomu [JP/JP]; 4–3–5–8, Nogami–cyo, Ohme–shi, Tokyo 198–0032 (JP). HAGA, Yosuke [JP/JP]; 663–1, Bessho–cyo, Ohmiya–shi, Saitama 331–0041 (JP). MASUDA, Shinji [JP/JP]; 384, Shimoda, Hino–shi, Tokyo 191–0023 (JP). ONO, Atuomi [JP/JP]; Room 202, 3–16–2, Minami Ohsawa, Hachiouji–shi, Tokyo 192–0364 (JP). MURAKAMI, Midori [JP/JP]; 5–28–16, Honda, Kokubunji–shi, Tokyo 185–0011 (JP).

(74) Agents: OKABE, Masao et al.; No. 602 Fuji Building, 2–3, Marunouchi 3–chome, Chiyoda–ku, Tokyo 100–0005 (JP).

(81) Designated States: CN, ID, KR, SG, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
Without international search report and to be republished upon receipt of that report.

(54) Title: DISC LOADING MECHANISM OF DISC APPARATUS

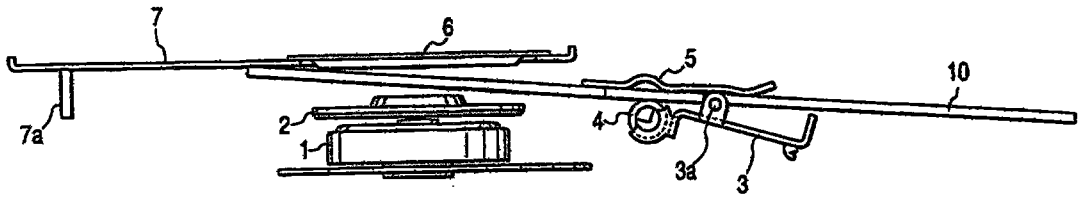

(57) Abstract

A disc reproduction apparatus capable of stabilizing the position of the circumferential edge of a disc during the disc loading and preventing the disc from abutting on a turntable. In the disc reproduction apparatus of the type that a disc (10) squeezed between a disc guide (5) and a disc roller (4) is loaded while the roller (4) is rotated, a disc contact surface of the disc guide (5) is slanted so that the disc is spaced from a turntable (2) along a disc transport direction when the disc is loaded.