

TEXTURE COMPOSITING APPARATUS AND METHOD

5

BACKGROUND OF THE INVENTION**1. Field of the Invention**

10 The present invention relates generally to the field of image processing, and more particularly to an apparatus for combining texel images to generate graphics images.

2. Description of Background Art

15 Recent advances in computer performance has enabled graphics systems to provide more realistic graphical images using personal computers and home video game computers. In such graphics systems, some procedure must be implemented to "render" or draw graphics primitives to the screen of the
20 system. "Graphics primitives" are a basic component of a graphics picture, such as a polygon, e.g., a triangle, or a vector. All graphics pictures are formed with combinations of these graphic primitives. many procedures may be utilized to perform graphics primitives rendering.

25 Conventional graphics systems perform these graphics rendering procedures using a frame buffer. A frame buffer generally comprises a plurality of computer memory chips that store information concerning pixel activation on the system's display screen. Generally, the frame buffer includes all of the
30 graphics data information that will be written onto the screen.

 Early graphics systems displayed images representing objects having extremely smooth surfaces. That is, textures, bumps, scratches, or other surface features were not modeled. In order to improve the quality of the image, texture mapping
35 was developed to model the complexity of real world surface images. In general, texture mapping is the mapping of an image or function onto a surface in three dimensions. Texture mapping is a relatively efficient technique for creating the appearance of a complex image without the tedium and computational cost of

rendering three dimensional detail that might be found on a surface of an object.

Many parameters have been texture mapped in conventional systems. Some of these parameters include surface color, specular reflection, normal vector perturbation, specularity, transparency, diffuse reflections, and shadows. In texture mapping, a source image known as the "texture" is mapped onto a surface in three dimensional space. The three dimensional surface is then mapped to the destination image, that is typically a graphics display screen. Examples of the texture of an object include the gravel on a highway or scuff marks on a wooden surface.

In conventional systems a texture is frequently combined with either a constant color or an iterated color. That is, in conventional systems multiple texture colors are not combined in a single execution pass. Examples of the types of combinations or functions available in conventional systems between the texture and the constant color or the iterated color include a multiply function, an addition function, and a subtraction function. In some conventional systems each of these functions are performed in a separate chip, in other conventional systems these functions are performed in parallel using multiple chips. In such conventional systems, having chips capable of performing a single function is an inefficient use of space. In addition, having functions performed in parallel, e.g., trilinear mipmapping, is expensive because memory is not used efficiently. For example, in order to implement trilinear mipmapping in a conventional system using parallel processing, a single mipmap is stored multiple times, i.e., once in each chip. Trilinear mipmapping is described in greater detail below.

What is needed is a graphical system that (1) permits texture images to be combined with other texture images and (2) is scalable, that is, multiple texture combine units can be serially coupled such that many texture images can be combined in a single execution pass, where each texture combine unit is capable of creating a new texture image by combining two input texture images.

SUMMARY OF THE INVENTION

The present invention is a texture compositing apparatus and method for combining multiple independent texture colors in a variety of ways in a single execution pass using a single texture compositing unit (TCU) per texture. The TCU receives a control signal, a blend factor, a local data signal (C_{local}/A_{local}), and an output data signal (C_{in}/A_{in}) generated by another TCU, the local data signal and the output data signal represent a texture color in a RGBA format. Based upon the control signal, the TCU can generate an output signal based on a variety of functions. The outputs that can be generated include: (1) zero; (2) one; (3) C_{in} ; (4) C_{local} ; (5) $C_{in} + C_{local}$; (6) $C_{in} - C_{local}$; (7) $C_{in} * C_{local}$; (8) $C_{in} * C_{local} + A_{local}$; (9) $C_{in} * A_{local} + C_{local}$; (10) $(C_{in} - C_{local}) * F_{blend} + C_{local}$; and (11) $(C_{in} - C_{local}) * (1 - F_{blend}) + C_{local}$. Another feature of the invention is that multiple TCUs can be serially coupled to enable addition texture colors to be combined in a single execution path.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an illustration of a computer system in which the preferred embodiment of the present invention operates.

Figure 2 is an illustration of the graphics engine of the preferred embodiment of the present invention.

Figure 3 is an illustration of a texture mapping unit and texture memory according to the preferred embodiment of the present invention.

Figure 4 is an illustration of a texture compositing unit according to the preferred embodiment of the present invention.

Figure 5 is an illustration of a texture combine sub-unit according to a first embodiment of the present invention.

Figure 6 is an illustration of a texture combine sub-unit according to a second embodiment of the present invention.

Figure 7 is an illustration of the logic in a texture combine sub-unit according to the second embodiment of the present invention.

Figure 8 is a flowchart of the operation of the texture

mapping unit according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 A preferred embodiment of the present invention is now described with reference to the figures where like reference numbers indicate identical or functionally similar elements. Also in the figures, the left most digit of each reference number corresponds to the figure in which the reference number
10 is first used.

Figure 1 is an illustration of a computer system 100 in which the preferred embodiment of the present invention operates. In the preferred embodiment, the computer system 100 is a conventional personal computer, e.g., an IBM compatible
15 personal computer. In an alternate embodiment the computer system is a video game platform, e.g., a Nintendo game platform, commercially available from Nintendo of America, Inc., Redmond, Washington. In the preferred embodiment the processor 102 of the computer system 100 is a Pentium processor, commercially
20 available from INTEL Corporation, Santa Clara, California. The memory 104 is conventional random access memory (RAM). The processor/memory bus 106 and the input/output (I/O) bus 110 are conventional. A conventional I/O bus controller 108 controls the data flow between the I/O bus 110 and the processor/memory
25 bus 106. Conventional input/output devices 116, e.g., a keyboard, is connected to the I/O bus 110. A conventional computer monitor 112 is driven by a graphics engine unit 114. The graphics engine unit 114 is described in greater detail below with reference to Figures 2-8.

30 Figure 2 is an illustration of the graphics engine unit 114 of the present invention. A frame buffer interface (FBI) 204 is coupled to the I/O bus 110. The FBI 204 is coupled to a frame buffer memory 202, a conventional digital-to-analog converter (DAC) 206, and one or more texture mapping units (TMU) 210. The
35 DAC 206 is also coupled to the monitor 112. Each TMU 210 is also connected to a texture memory 212. The FBI 204 is an application specific integrated circuit (ASIC) that serves as a I/O slave device, and all communication from the processor 102 to the graphics engine 114 is performed through the FBI 204.

The FBI 204 implements basic three dimensional primitives including Gouraud shading, depth buffering, and dithering. The FBI 204 also controls the output to the monitor 112.

The TMU 210 is also an ASIC. The TMU 210 performs
5 composite texture mapping including texture morphing, and trilinear filtering. The operation of the TMU 210 is described in greater detail below with reference to Figures 3-8. Preferably, the frame buffer memory 202 and the texture memory 212 are extended-data-out (EDO) dynamic random access memory
10 (DRAM). The TMU 210 receives a control signal CTRL from the FBI 204 via a control signal line 216. In addition, the TMU 210 receives a local texture color/alpha signal from its associated texture memory 212. The local texture color/alpha signal is received via a local texture color signal line 226, and a local
15 texture alpha signal line 228. In addition, each TMU 210 receives a texture color/alpha input signal from a previous, or "upstream", TMU 210. The texture color/alpha input signal is received via the input/output texture color signal line 218, and the input/output texture alpha signal line 220. Each TMU 210
20 generates a texture color/alpha output signal. This texture color/alpha output signal is transmitted on another input/output texture color line 218 and another input/output alpha texture color line 220. The texture color value generated by the TMU 210C that is the last in the chain of TMU's 210 is transmitted
25 to the FBI 204. The inputs to the TMU 210 and the outputs from the TMU 210 are described in greater detail below with reference to Figure 3.

Figure 3 is an illustration of a TMU 210 and a texture memory unit 212 of the present invention. Each TMU 210 includes
30 a texture compositing unit (TCU) 304 and a LOD composite factor register 302. The LOD composite factor register 302 includes information relating to the image's level of detail, as described below. The TCU 304 receives the CTRL signal via the control signal line 216, a texture color input signal, a local
35 texture color signal, and a data signal. The texture color input signal is comprised of a texture color input signal C_{in} received on the input/output texture color signal line 218 and a texture alpha input signal A_{in} received on the input/output texture alpha signal line 220. The local texture color/alpha

signal is comprised of a local texture color signal C_{local} that is received on the local texture color signal line 226 and a local texture alpha signal A_{local} that is received on the local texture alpha signal line 228. The data signal is received from the LOD composite factor register 302 via data line 320. As described above, the texture color/alpha input signal is the texture color/alpha output signal from a previous (upstream) TMU 210. For the first TMU 210A no texture color/alpha input signal is received. The local texture color/alpha signal is produced from a texture lookup in the texture memory 212. The result is a signal that is, preferably, in a 32 bit red-green-blue-alpha (RGBA) format having 8 bits allocated for each texture color component. The texture color/alpha input signal (C_{in} , A_{in}), the texture color/alpha output signal (C_{out} , A_{out}), and the local texture color/alpha signal (C_{local} , A_{local}) are all in the 32 bit RGBA format. Persons skilled in the relevant art will recognize that each texture color component can be represented by a different number of bits and that different and additional texture colors can be used. In addition to the various texture color signals described above, the TCU 304 receives the control signal CTRL from the FBI 204 via control signal line 216. The operation of the control signal CTRL is described below with reference to Figures 5-8.

Figure 4 is an illustration of a TCU 304 according to the present invention. The TCU 304 includes identical logic for each of the four color channels of the texture color signal, i.e., red, green, blue, and alpha. The logic for the red color channel is located within a texture red combine sub-unit (TRCU) 402A. The logic for the green color channel is located within a texture green combine sub-unit (TGCU) 402B. The logic for the blue color channel is located within a texture blue combine sub-unit (TBCU) 402C. The logic for the alpha channel is located within a texture alpha combine sub-unit (TACU) 402D. In the preferred embodiment, the TRCU 402A, the TGCU 402B, and the TBCU 402C perform the same functions. Accordingly, the control signal CTRL includes a first set of control bits, $CTRL_{rgb}$, on color control signal line 404 for controlling the functions performed by the TRCU 402A, the TGCU 402B, and the TBCU 402C. The control signal CTRL also includes a second set of control

bits $CTRL_a$ for controlling the functions performed by the TACU 402D. The second set of control bits $CTRL_a$ are received on alpha control signal line 410. The control signal line 216 includes the color control signal line 404 and the alpha control signal line 410. In an alternate embodiment each texture combine sub-unit 402 is controlled by independent control signals.

Each TCU 304 receives five data inputs. For the TRCU 402A, TGPU 402B, and the TBCU 402C the inputs are the local texture color/alpha signal comprised of C_{local} and A_{local} , the input texture color/alpha signal comprised of C_{in} and A_{in} , and a blend factor received via data line 320. In addition to these data signals, these texture combine sub-units 402A, 402B, 402C, receive a first set of control bits $CTRL_{rgb}$, as described above. Similarly, the TACU 402D receives five data inputs. However the data inputs to the TACU 402D differ from the other texture combine sub-units 402. The data inputs to the TACU 402D include the blend factor received via data line 320, two copies of the input texture alpha signal A_{in} and two copies of the local texture alpha signal A_{local} . That is, the TACU 402D does not require the input texture color signal C_{in} or the local texture color signal C_{local} . In addition to these data signals, the TACU 402D receives a second set of control bits $CTRL_a$, as described above.

Each TCU 304 of the present invention generates a texture color output signal C_{out} and a texture alpha output signal A_{out} from the input signals described above based upon at least the following functions (or their equivalents):

- (1) zero;
- (2) one;
- (3) C_{in} ;
- (4) C_{local} ;
- (5) $C_{in} + C_{local}$;
- (6) $C_{in} - C_{local}$;
- (7) $C_{in} * C_{local}$;
- (8) $C_{in} * C_{local} + A_{local}$;
- (9) $C_{in} * A_{local} + C_{local}$;
- (10) $(C_{in} - C_{local}) * F_{blend} + C_{local}$;
- (11) $(C_{in} - C_{local}) * (1 - F_{blend}) + C_{local}$.

It will be apparent to persons skilled in the art that other functions or control signals can be used to generate additional output signals. Functions (1)-(11) are useful for combining multiple texture colors. An output of a logical zero or a logical one (functions (1) and (2)) is used for blending texture colors, as described below. The ability to blend a transparent texture color with a base texture color is achieved using the alpha values of the texture color/alpha signals. The ability to generate a signal having a logical zero or a logical one value permits a zero transparency blend or a full transparency blend to be implemented based on the values of the CTRL signal 216 and, therefore, does not require the storing of the blending factor F_{blend} in texture memory 212. An output signal that is equal to the texture color input signal C_{in} or the local texture color signal C_{local} (functions (3) and (4)) can be used to distribute these texture maps across multiple TMU chips 210 within the graphics engine 114. Thus the texture map can reside in any TMU chip's texture memory 212 and adding additional TMUs 210 to the graphics system increases the total texture memory 212 available in the graphics system.

Generating an output signal by combining the texture color input signal and the local texture color signal, i.e., $C_{in} + C_{local}$, can be used to model a specular or additive lighting effect. An example of a specular lighting effect is a highlight reflected from a shiny object, e.g., an aluminum can.

Generating an output signal by subtracting the local texture color signal from the texture color input signal, i.e., $C_{in} - C_{local}$, can be used to model shadows. Generating an output signal by multiplying the texture color input signal and the local texture color signal, i.e., $C_{in} * C_{local}$, can be used to model a diffuse or multiplicative lighting effect. A diffuse lighting effect occurs when the intensity of light reflecting from an object is dependent upon the orientation of the object with respect to a light source. In addition, multiplying the texture color input signal and the local texture color signal can be used to model a filter, such as a red lens or a glass window.

Generating an output signal C_{out}/A_{out} using a multiply and add function models the combination of the multiplicative or

diffuse lighting effect and the specular lighting effect, described above. In particular, multiplying the texture color input signal and the local texture color signal and then adding the local texture alpha signal, i.e., $C_{in} * C_{local} + A_{local}$, models a texture color diffuse highlight and a monochrome specular highlight. Similarly, multiplying the input texture color signal by the local texture alpha signal and adding the local texture color signal, i.e., $C_{in} * A_{local} + C_{local}$, models a monochrome diffuse highlight and a texture colored specular highlight effect. It should be noted that with more inputs the TCU 304 could implement color diffuse highlights and color specular highlights simultaneously.

As stated above, a feature of the present invention is that multiple texture colors signals, e.g., C_{in} and C_{local} , can be blended together to form a new texture output color signal C_{out} and a new texture output alpha signal A_{out} . Accordingly, each TMU 210 can perform composite texture mapping including texture morphing and trilinear mipmapping using functions (10) and (11) set forth above. In composite texture mapping the value of the F_{blend} signal in function (10) or (11) is typically equal to the value of the A_{in} signal, the A_{local} signal, a function of the LOD signal, e.g., $f(LOD)$ signal, or the fractional portion of the LOD signal, e.g., $frac(LOD)$. One example of composite texture mapping is applying a translucent or opaque decal on top of another texture. Rather than rasterizing the decal after a base textured polygon is rendered, as is done in conventional graphics systems, the base texture image and the decal texture image can be combined in one execution pass of the graphics system, where a TCU 304 in a first TMU 210B generates a first texture image and a TCU 304 in a second TMU 210C receives the first texture image, e.g., the decal texture image, and combines it with a second texture image, i.e., the base texture image. For example, dirt marks and scratches can be applied to a textured wall in one execution pass by the TCU 304 by placing the dirt marks and scratches in a translucent texture output from a TCU 304 in the first TMU 210B and blending this texture with the underlying textured wall in a TCU 304 of the second TMU 210C. In conventional systems, one large texture is created. The advantage of separating the images into two textures is that

the underlying base wall texture can be a high resolution repeating texture, i.e., many texels per unit length, such as wood or stucco, while the translucent texture can have a low resolution. This combination gives the illusion of having a large non-repeating texture at the high resolution of the underlying texture. In addition, the underlying base wall texture can also be used for other walls, either without a translucent texture or with different translucent textures. As described above, a feature of the present invention is that multiple texture images can be combined in a single execution pass, i.e., one pipelined execution of all of the TMUs 210.

In composite texture mapping if the value of the Fblend signal is based on the level-of-detail (LOD) of the image, the signal is either received from the LOD composite factor register 302 via data line 320 or is generated by additional logic based upon values stored in the LOD composite factor register 302. In general, the level-of-detail is a measure of the magnification of the image, or more precisely, is a measure of the number of texels contained in each pixel. Uses of composite blending include creating composite texture images and morphing texture images. When morphing texture images the blending factor is varied in time, resulting is a gradual fade-out of the base texture and a fade-in of the composite texture. One example of texture morphing are images illustrating the transformation of a man into werewolf. A first texture image can be the skin of a man, the second texture can be animal fur. In time, the first texture fades-out and the second texture fades-in creating the image of a werewolf transformation.

If the system includes multiple TMUs 210, the system can implement trilinear mipmapping in a single execution pass by compositing two bilinearly filtered texture maps. Each bilinear filtering operation is completed in a separate TMU 210. Alternatively, a single TMU 210 can implement trilinear mipmapping in two execution passes. In a dual TMU model, two TMUs 210 each comprise data which together represent all mipmap levels. For example, one TMU 210B has all odd mipmapping levels. A second TMU 210C has all even mipmapping levels. This is an efficient technique for storing the mipmap levels since each mipmap level is stored only once, i.e., in either the first

TMU 210B (odd-level TMU) or the second TMU 210C (even-level TMU). As described above, the LOD signal represents an approximation of the ratio of texel pitch to pixel pitch. A more detailed description of trilinear mipmapping is given in
5 Lance Williams "Pyramidal Parametrics" 17 Computer Graphics (SIGGRAPH 83 PROC.) No. 3, 1-11 (July 1983), that is hereby incorporated by reference in its entirety. In one embodiment of trilinear mipmapping, a mipmap level is equal to the integer value of the LOD signal. However, the magnification or level of
10 detail of an image is frequently between two mipmap levels. Accordingly, the present invention enables two sequential mipmaps to be blended according to the fractional portion of the LOD signal, i.e., $\text{frac}(\text{LOD})$, in order to generate an image having a proper texel-pitch/pixel-pitch ratio. Additional
15 details for implementing trilinear mipmapping in the present invention are described below with reference to Figure 7 and Figure 8.

As described above, a feature of the present invention is the ability to cascade several identical TMUs 210 in a serial
20 architecture, where each TMU 210 is capable of performing, at least, functions (1) through (11) described above. The multiple serial TMUs 210 enable a plurality of functions to be performed on multiple texture maps, e.g., one texture map per TMU 210, during a single execution pass.

25 Figure 5 is an illustration of a texture combine sub-unit 402 according to a first embodiment of the present invention. Each texture combine sub-unit includes several logic units. These logic units include a pass-thru/replace/constant unit 502, a multiply and add unit 504, an add unit 506, a subtract unit
30 508, and a blend unit 510. Distinct logic can be in each logic unit or the logic can be combined as illustrated in Figures 6 and 7. In the TRCU 402A, the TGPU 402B, and the TBCU 402C the data inputs include the texture color input signal C_{in} , the texture alpha input signal A_{in} , the local texture color signal
35 C_{local} , the local texture alpha signal A_{local} , and the blend factor F_{blend} received via data line 320. In addition these texture combine sub-units receive the $CTRL_{rgb}$ control signal. As described above with reference to Figure 4, the data received by the TACU 402D include two local texture alpha signals A_{local} ,

two texture alpha input signals A_{in} , and the blend factor F_{blend} . That is, in the TACU 402D the C_{local} signal is replaced with an A_{local} signal and the C_{in} signal is replaced with an A_{in} signal. The pass-thru/constant/replace unit 502 receives the
5 input signals and generates either a binary zero signal, a binary one signal, a signal representing C_{local} , a signal representing A_{local} , a signal representing C_{in} , or a signal representing A_{in} based upon the CTRL signal. The multiply and
10 add unit 504 receives the inputs signals and performs a multiply and add operation on the inputs based upon the CTRL signal. The add unit 506 receives the inputs signals and performs an add operation on the inputs based upon the CTRL signal. The
subtraction unit 508 receives the inputs signals and performs a subtract operation on the inputs based upon the CTRL signal.
15 The blend unit 510 receives the inputs signals and performs a blending operation on the inputs based upon the CTRL signal. The functions of the texture combine sub-units 402 can be combined, for example, the add unit 506 can be eliminated and additions can be accomplished using only the multiply and add
20 unit 504. In a second embodiment, the logic units are combined as illustrated in Figure 6 and Figure 7.

Figure 6 is an illustration of a texture combine sub-unit 402 according to a second embodiment of the present invention. Each texture combine sub-unit 402 includes four logic units.
25 The logic units are a pass-thru/subtraction unit 602, a blending factor determinator 604, a multiply and add unit 606 and a clamping and inversion unit 608. The data inputs for the TRCU 402A, TGPU 402B, and the TBCU 402C are the same as described above with respect to Figure 5. That is, C_{local} , A_{local} , C_{in} ,
30 A_{in} , and F_{blend} . The data inputs for TACU 402D are A_{local} (twice), A_{in} (twice), and F_{blend} , as described above. An example of the logic within each logic unit is described below with reference to Figure 7.

Figure 7 is an illustration of the logic in a texture
35 combine sub-unit 402 according to a second embodiment of the present invention. The pass-thru-subtraction unit 602 includes a two multiplexors (MUX) 702, 704, a two's complement operator 708, and an adder 706. The blending factor determinator 604 includes a MUX 710, an exclusive-OR gate 714, and an incrementor

730. The multiply and add unit 606 includes a multiplier 716, a MUX 718, and an adder 722. The clamping and inversion unit 608 includes an 8-bit clamp 724 and an exclusive-OR gate 726. As illustrated in Figure 7, the logic for implementing the texture
5 combine sub-unit functions are non-exclusive. The implementation of functions (1)-(9) set forth above will be apparent to persons skilled in the relevant art. The implementation of function (10) $(C_{in} - C_{local}) * F_{blend} + C_{local}$, and function (11) $(C_{in} - C_{local}) * (1 - F_{blend}) + C_{local}$,
10 are now described.

The implementation of function (10) and function (11) is described below with reference to Figure 7. The control signal CTRL includes the ZERO/OTHER control signal, the SUB_CLOCAL control signal, the ADD_CLOCAL control signal, the ADD_ALOCAL
15 control signal, the INVERT control signal, the REVERSE_BLEND control signal, the INCREMENT control signal, and the SELECT[2:0] control signal. MUX 702 selects C_{in} based upon control signal ZERO/OTHER. Similarly, MUX 704 selects C_{local} based upon control signal SUB_CLOCAL. The two's complement unit
20 708 performs a two's complement operation on the output of MUX 704. Adder 706 performs an addition operation on the output of 702, i.e., C_{in} , and the output of the two's complement unit 708, i.e., a representation of $-C_{local}$ (negative C_{local}). Accordingly, the output of adder 704 is $C_{in} - C_{local}$.

25 The MUX 710 in the blending factor determinator 604 selects one of six inputs (0, C_{local} , A_{in} , A_{local} , $f(LOD)$, and $frac(LOD)$), based upon the value of the SELECT[2:0] control signal in the blending factor determinator 604. If the texture combine sub-unit 402 is performing a trilinear mipmapping
30 operation, the SELECT[2:0] control signal selects the $frac(LOD)$ signal representing the fractional portion of the LOD value, as described above. If the $frac(LOD)$ signal is selected by the MUX 710 and the blend factor determination operation is occurring in a TCU 304 that is associated with the odd mipmap level and the
35 integer portion of the LOD signal is odd, then the blending factor is equal to $frac(LOD)$. Therefore, the REVERSE_BLEND control signal is equal to a logical zero. Similarly, if the $frac(LOD)$ signal is selected by the MUX 710 and the blend factor determination operation is occurring in a TCU 304 that is

associated with the even mipmap level and the integer portion of the LOD signal is even, then the blending factor is equal to $\text{frac}(\text{LOD})$ and the REVERSE_BLEND control signal is equal to a logical zero.

5 If the $\text{frac}(\text{LOD})$ signal is selected by the MUX 710 and the blend factor determination operation is occurring in a TCU 304 that is associated with the odd mipmap level and the integer portion of the LOD signal is even, then the blending factor is equal to: $1 - \text{frac}(\text{LOD})$. This situation occurs when implementing
10 function (11). Therefore, the REVERSE_BLEND control signal is equal to a logical one and the INCREMENT control signal is equal to a logical one. Similarly, if the $\text{frac}(\text{LOD})$ signal is selected by the MUX 710 and the blend factor determination operation is occurring in a TCU 304 that is associated with the
15 even mipmap level and the integer portion of the LOD signal is odd, then the blending factor is equal to: $1 - \text{frac}(\text{LOD})$. Therefore, the REVERSE_BLEND control signal is equal to a logical one and the INCREMENT control signal is equal to a logical one. Accordingly, when the REVERSE_BLEND and INCREMENT
20 control signals are high, a two's complement operation is performed on the output of the MUX 710 by the exclusive-OR gate 714 and the incrementor 730 generating the $(1 - F_{\text{blend}})$ component of function (11). Logic external to the TCU 304 controls the REVERSE_BLEND control signal. The INCREMENT control signal is
25 high when the REVERSE_BLEND control signal is high or when the output of the MUX 710 is not $\text{frac}(\text{LOD})$.

 The multiplier multiplies the nine bit output of adder 706 and incrementor 730. The output signal of the multiplier represents $(C_{\text{in}} - C_{\text{local}}) * F_{\text{blend}}$ for function (10) and $(C_{\text{in}} -$
30 $C_{\text{local}}) * (1 - F_{\text{blend}})$ for function (11). The multiplier 716 generates an 18 bit output. The nine most significant bits (MSB) are input into adder 722. The second input into adder 722 is the output of MUX 718. The ADD_CLOCAL/ADD_ALOCAL signal is set to binary "10" in order for MUX 718 to select the C_{local}
35 signal. Adder 722 adds C_{local} to the output of the multiplier 716. The output of adder 722 is received by the clamping and inversion unit 608. The output of adder 722 is clamped between 00 and FF, i.e., the clammer 724 outputs the eight least significant bits. The INVERT signal is equal to zero since no

inversion is required to implement either function (10) or function (11). Accordingly, the input and the output of exclusive-OR gate 726 are the same and are equal to $(C_{in} - C_{local}) * F_{blend} + C_{local}$ for function (10) and $(C_{in} - C_{local}) * (1 - F_{blend}) + C_{local}$ for function (11).

Figure 8 is a flowchart of the operation of the TMU 210. A TMU 210 is selected 802. Based upon the control signal CTRL the TCU 304 determines 804 if a constant function is requested. If a constant function is requested, the TCU 304 generates 806 a signal representing the requested constant value. The TCU 304 also determines 810 if a pass-thru or a replace operation is requested based upon the control signal CTRL. If a pass-thru or a replace operation is requested, the TCU 304 generates 812 a signal representing the requested pass-thru or replace operation. The TCU 304 also determines 816 if an addition operation is requested based upon the control signal CTRL. If an addition operation is requested, the TCU 304 generates 818 a signal representing the addition of the selected inputs. The TCU 304 also determines 822 if a subtraction operation is requested based upon the control signal CTRL. If a subtraction operation is requested, the TCU 304 generates 824 a signal representing the subtraction of the selected inputs. The TCU 304 also determines 828 if an multiply and add operation is requested based upon the control signal CTRL. If a multiply and add operation is requested, the TCU 304 generates 830 a signal representing the requested multiply and add operation. The TCU also determines 834 if a blend operation is requested based upon the control signal CTRL. If a blend operation is requested, the TCU 304 receives 836 a blend factor and implements 838 a blending operation to generate a blended signal.

While the invention has been particularly shown and described with reference to a preferred embodiment, it will be understood by persons skilled in the relevant art that various change in form and details can be made therein without departing from the spirit and scope of the invention.



* C L M S *

THIS SHEET HAS BEEN
REPLACED

WO 97/16803

PCT/US96/17401

CLAIMS

What is claimed is:

- 5 1. An apparatus, receiving a first texture color signal and a second texture color signal, for implementing one of a blend function and an add function during a single execution pass, the apparatus comprising:
- a first texture composite unit including:
- 10 a first blend factor determinator, for determining a first blend factor, said first blend factor representing a relationship between the first texture color signal and the second texture color signal;
- a first blending unit, coupled to said first blend
- 15 factor determinator, for blending said first texture color signal and the second texture color signal based upon said first blend factor; and
- a first addition unit, having the first texture color signal and the second texture color signal as inputs, for adding
- 20 the first texture color signal and the second texture color signal.
2. The apparatus of claim 1, further comprising:
- a subtraction unit, having the first texture color signal
- 25 and the second texture color signal as inputs, for subtracting the first texture color signal from the second texture color signal.
3. The apparatus of claim 2, further comprising:
- 30 a multiplication and add unit, having the first texture color signal and the second texture color signal as inputs, for multiplying the first texture color signal with the second texture color signal and adding one of the first texture color signal and a third signal.
- 35 4. The apparatus of claim 2, further comprising:
- a multiplication unit, having the first texture color signal and the second texture color signal as inputs, for multiplying the first texture color signal with the second





* C L M S *

WO 97/16803

THIS SHEET HAS BEEN
REPLACED

PCT/US96/17401

texture color signal.

5. The apparatus of claim 4, further comprising:
a constant generating unit, for generating a signal
5 representing a predefined value.

6. The apparatus of claim 4, further comprising:
a pass-thru unit, coupled to the first texture color
signal, for outputting the first texture color signal.

10

7. The apparatus of claim 1, wherein the first texture
color signal and the second texture color signal include four
texture component color signals.

15

8. The apparatus of claim 7, wherein said four texture
component color signals include a red color signal, a green
color signal, a blue color signal, and an alpha color signal.

20

9. The apparatus of claim 7, further comprising four
texture combine subunits, each texture combine subunit
associated with one of said four texture component color
signals, each of said texture combine subunits having said first
blend factor determinator, said blending unit, and said addition
unit.

25

10. The apparatus of claim 9, wherein each of said texture
combine subunits receive a control signal, and performs one of
the blend function and the add function in response to said
control signal in a single execution pass.

30

11. The apparatus of claim 9, wherein two or more of said
texture combine subunits receive a first control signal and
performs one of the blend function and the add function in
response to said first control signal in a single execution
35 pass.

12. The apparatus of claim 1, further comprising a second
texture composite unit, including:
a second texture composite unit receiving said fifth





THIS SHEET HAS BEEN
REPLACED

WO 97/16803

PCT/US96/17401

texture color signal and one of said third texture color signal and said fourth texture color signal from said first texture composite unit, said second texture composite unit including:

5 a second blend factor determinator, for determining a second blend factor, said second blend factor representing a relationship between said fifth texture color signal and one of said third texture color signal and said fourth texture color signal;

10 a second blending unit, coupled to said second blend factor determinator, for blending said fifth texture color signal and one of said third texture color signal and said fourth texture color signal based upon said second blend factor; and

15 a second addition unit, for adding said fifth texture color signal and one of said third texture color signal and said fourth texture color signal.

13. The apparatus of claim 12, further comprising a first storage unit coupled to said first texture composite unit and a second storage unit coupled to said second texture composite unit, said first storage unit storing a first mipmap level, said second storage unit storing a representation of a second mipmap level.

25 14. The apparatus of claim 13, wherein said blending factor is equal to a selected composite factor representing one of said first mipmap level and a mid-level mipmap level between said first mipmap level and said second mipmap level, the first texture color signal representing said first mipmap level, the second texture color signal representing said second mipmap level.

15. A computer based method for performing one of a blending operation and an addition operation on a first texture color signal and a second texture color signal during a single execution pass, comprising the steps of:

receiving said first texture color signal and the second texture color signal;

receiving a control signal, said control signal identifying





WO 97/16803

THIS SHEET HAS BEEN
REPLACED

PCT/US96/17401

one or more operations to be performed;

determining a blend factor representing a relationship between said first texture color signal and the second texture color signal; and

- 5 performing one of the blending operation and the addition operation in a single execution pass in response to said control signal, said blending operation combining said first texture color signal and said second texture color signal according to said blend factor, said addition operation adding said first
10 texture color signal to said second texture color signal to generate a first texture color output signal.

16. The method of claim 15, further comprising the step of:

- 15 performing a subtraction operation on said first texture color signal and said second texture color signal in response to said control signal.

17. The method of claim 15, further comprising the step
20 of:

performing a multiplication operation on said first texture color signal and said second texture color signal in response to said control signal.

18. The method of claim 15, further comprising the step
25 of:

generating said first texture color signal in response to said control signal.

19. The method of claim 15, further comprising the step
30 of:

generating one of a binary one signal and a binary zero signal in response to said control signal.

20. The method of claim 15, further comprising the steps
35 of:

receiving said first texture color output signal and a third texture color signal;

receiving a second control signal, said second control



THIS SHEET HAS BEEN
REPLACED

WO 97/16803

PCT/US96/17401

signal identifying one or more operations to be performed;

determining a second blend factor representing a relationship between said first texture color output signal and said third texture color signal; and

- 5 performing one of the blending operation and the addition operation in a single execution pass in response to said second control signal, said blending operation combining said first texture color output signal and said third texture color signal according to said second blend factor, said addition operation
- 10 adding said first texture color output signal to said third texture color signal to generate a second texture color output signal.

This Sheet Has Been Replaced



1/8

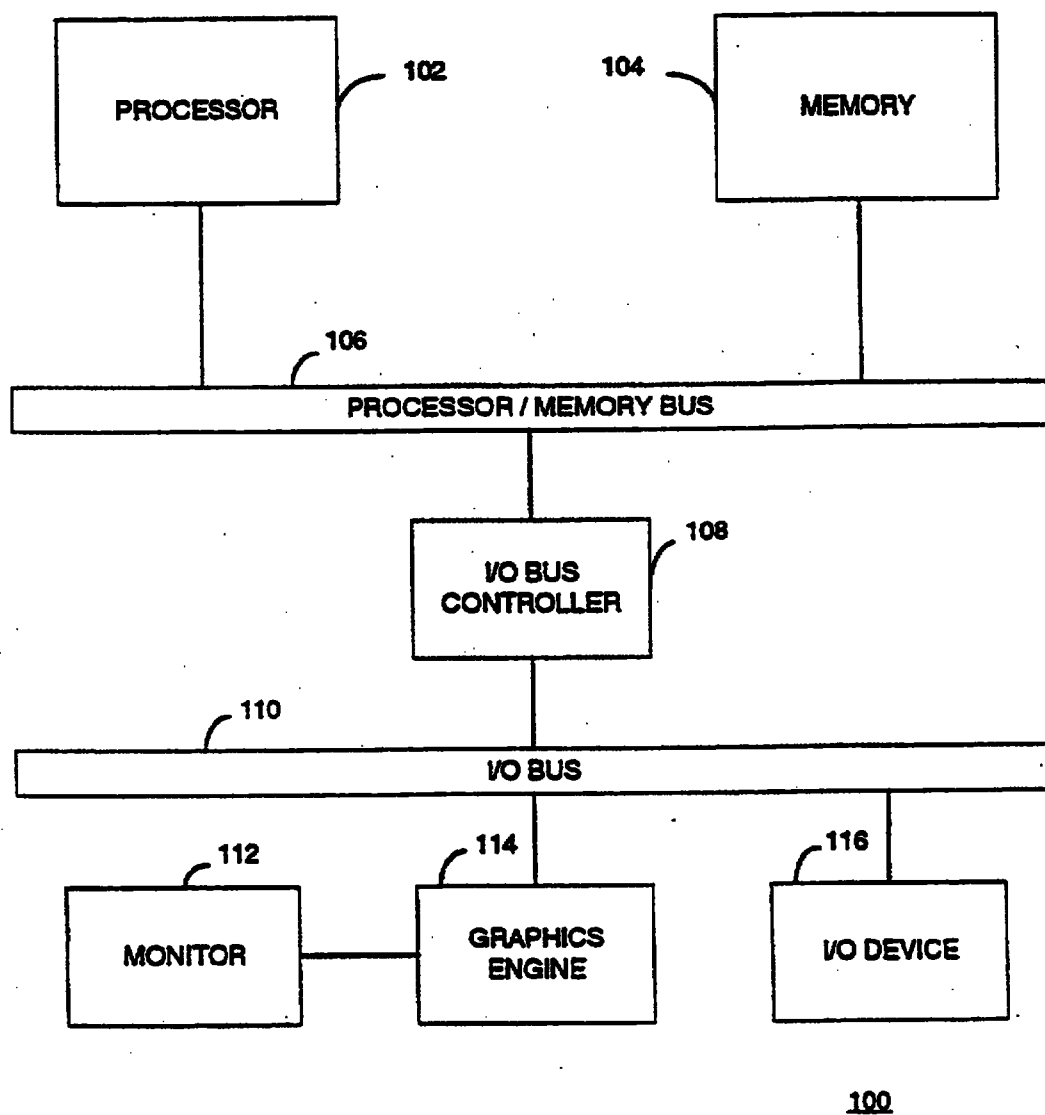


FIGURE 1

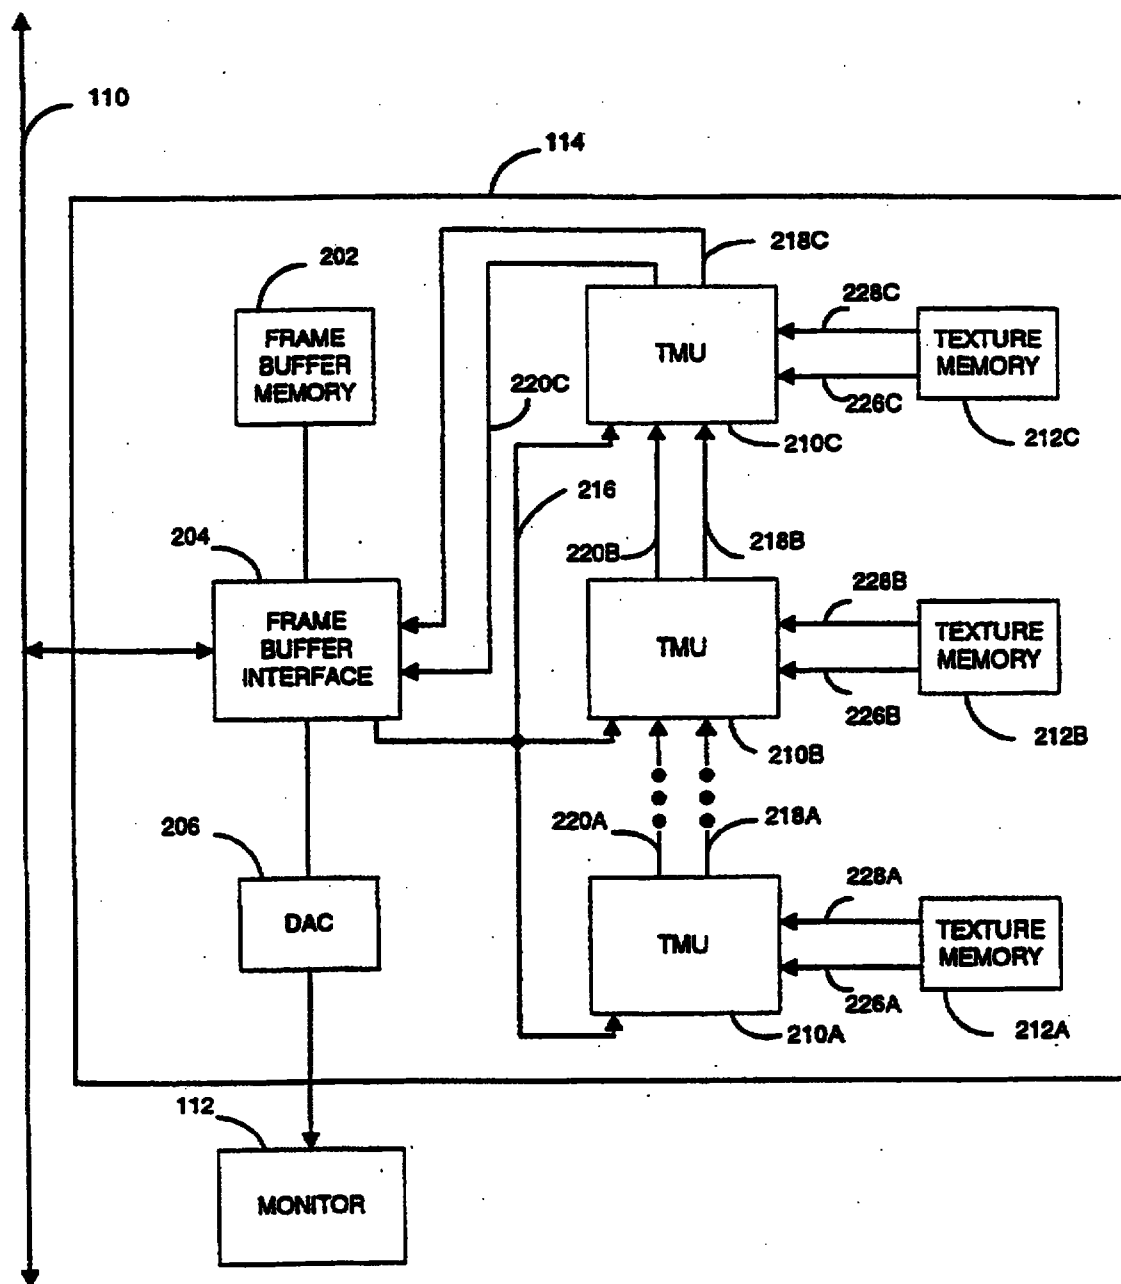


FIGURE 2

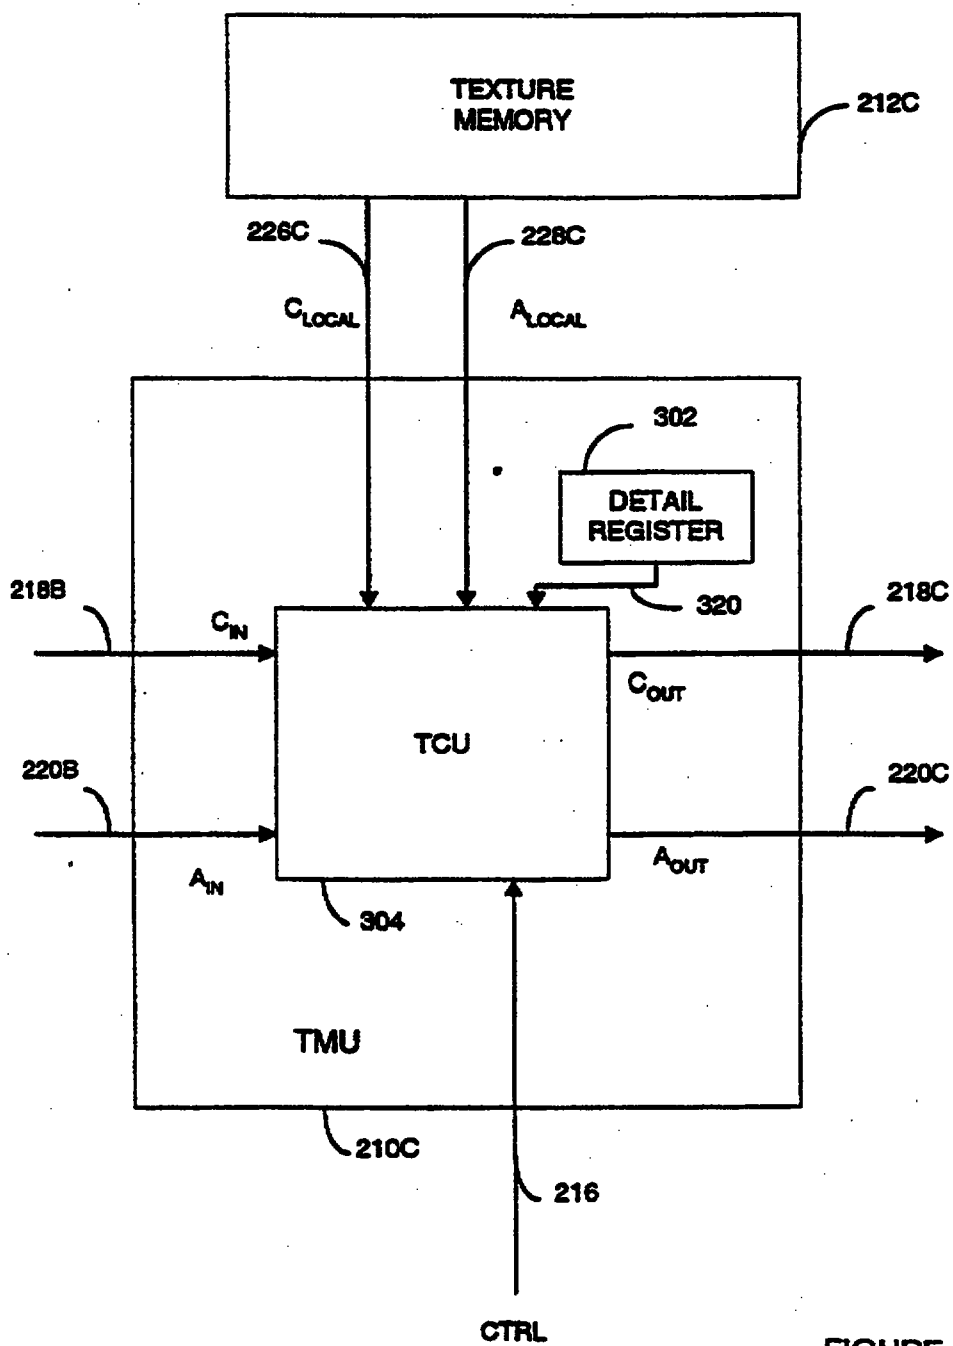


FIGURE 3

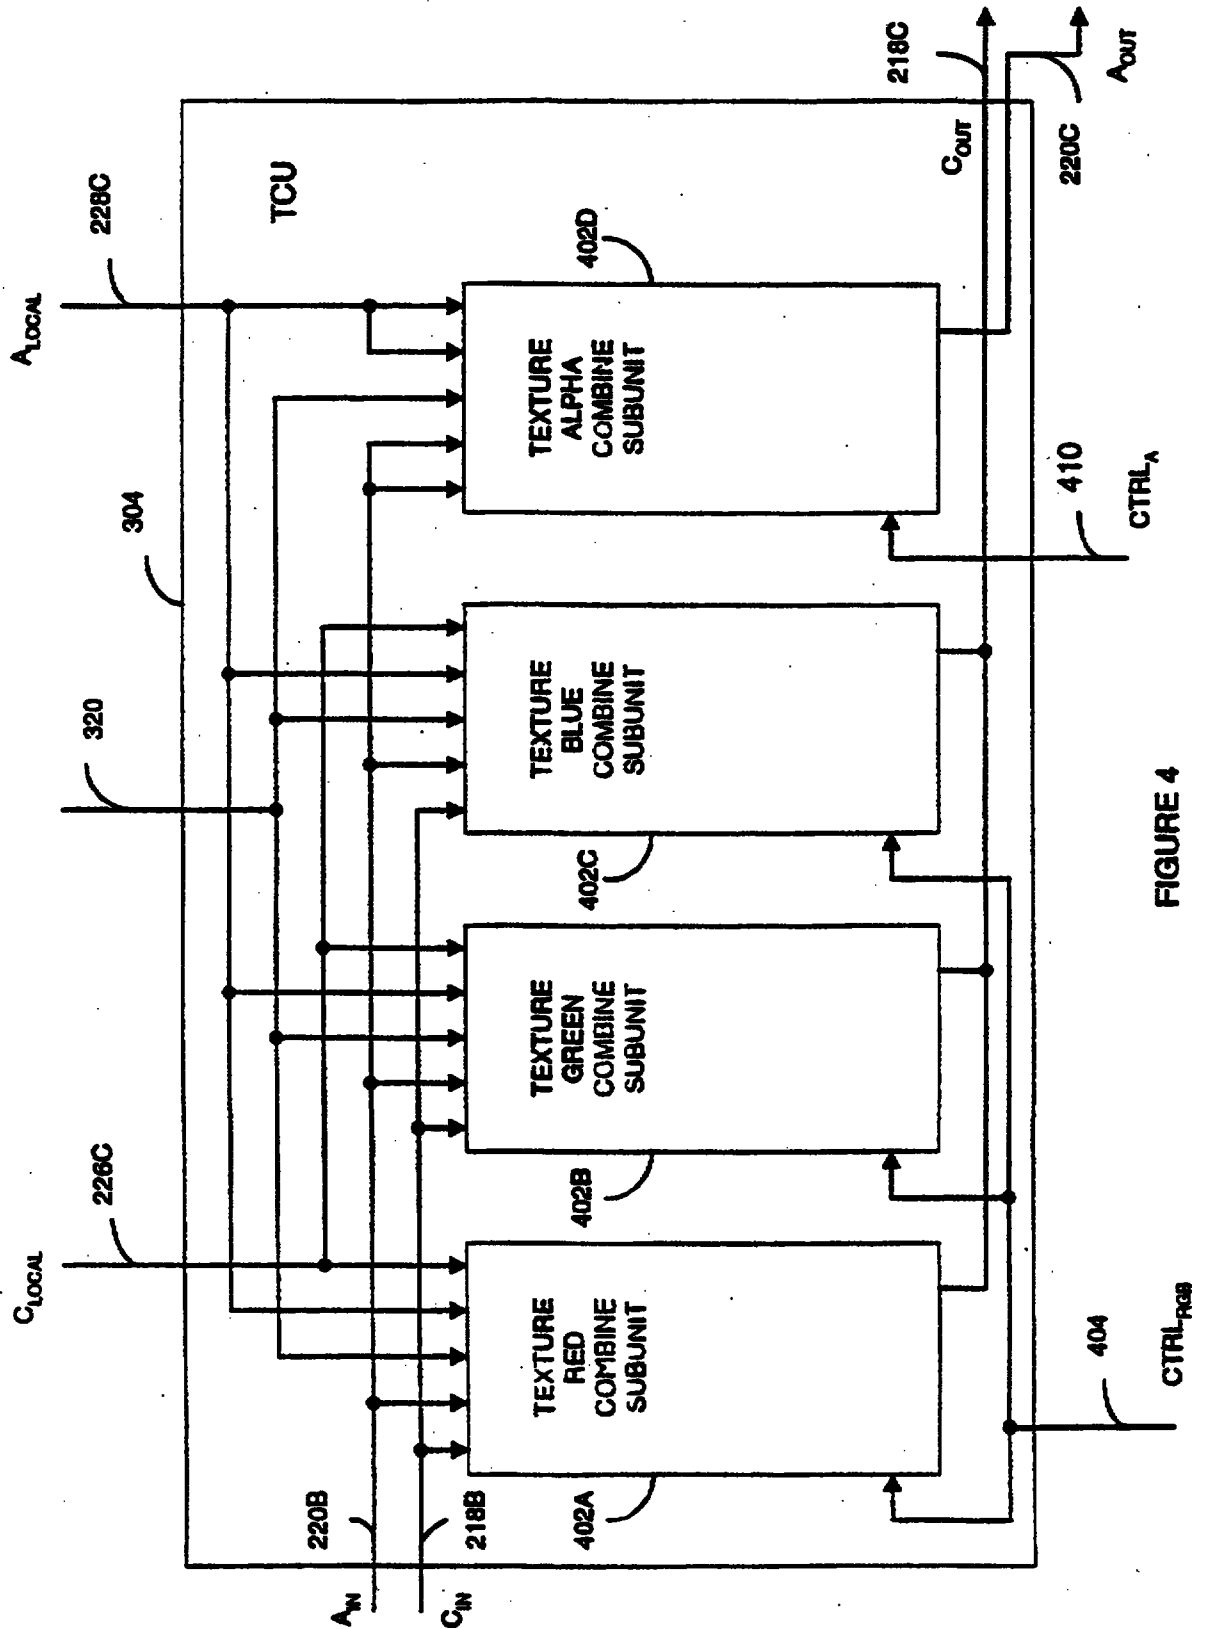


FIGURE 4

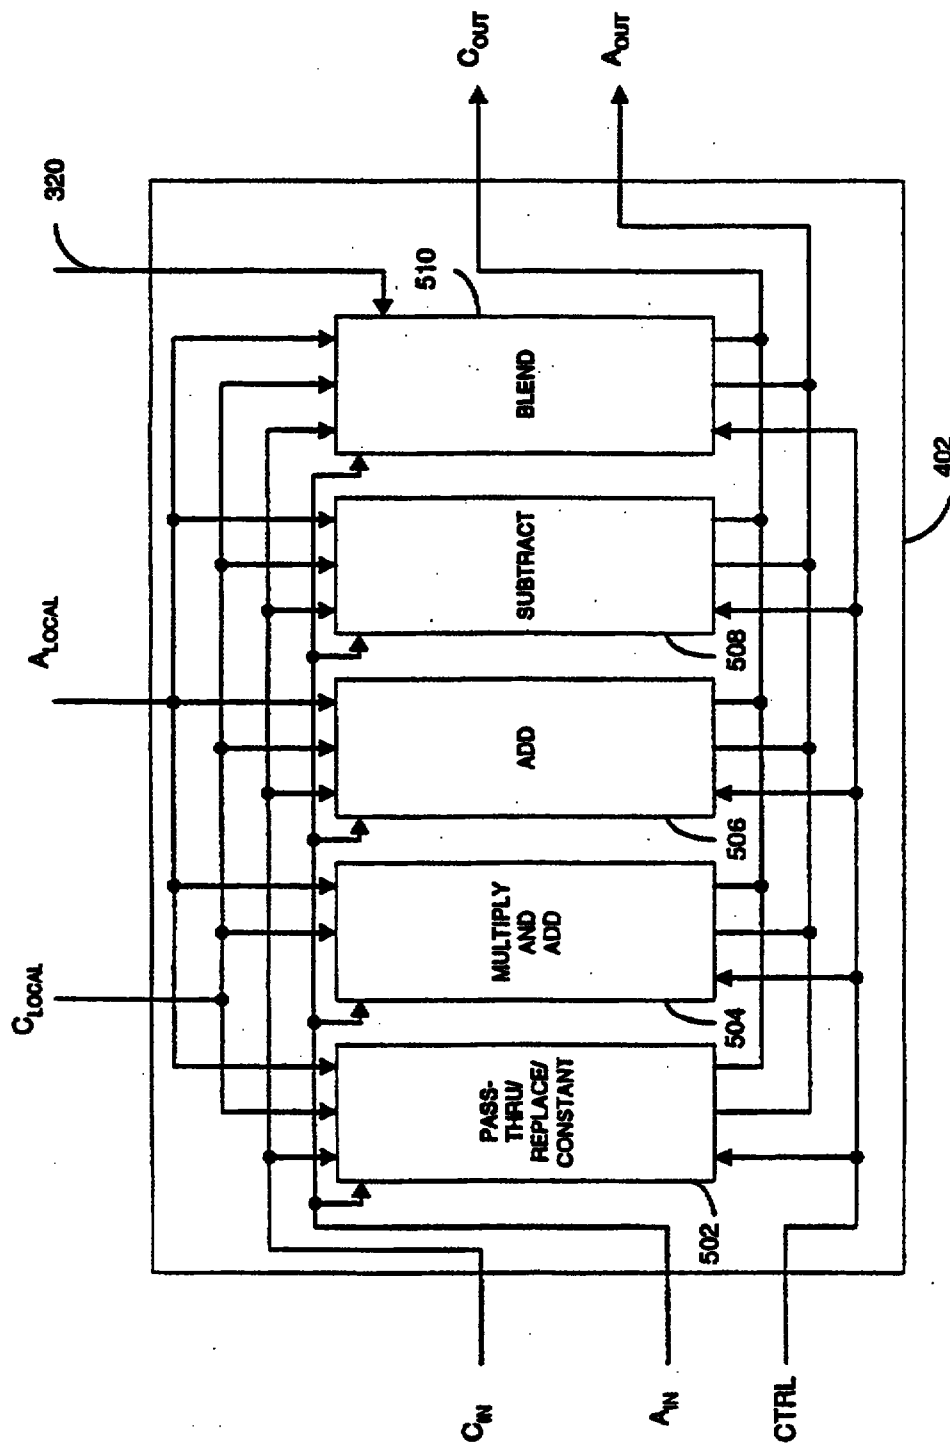


FIGURE 5

6/8

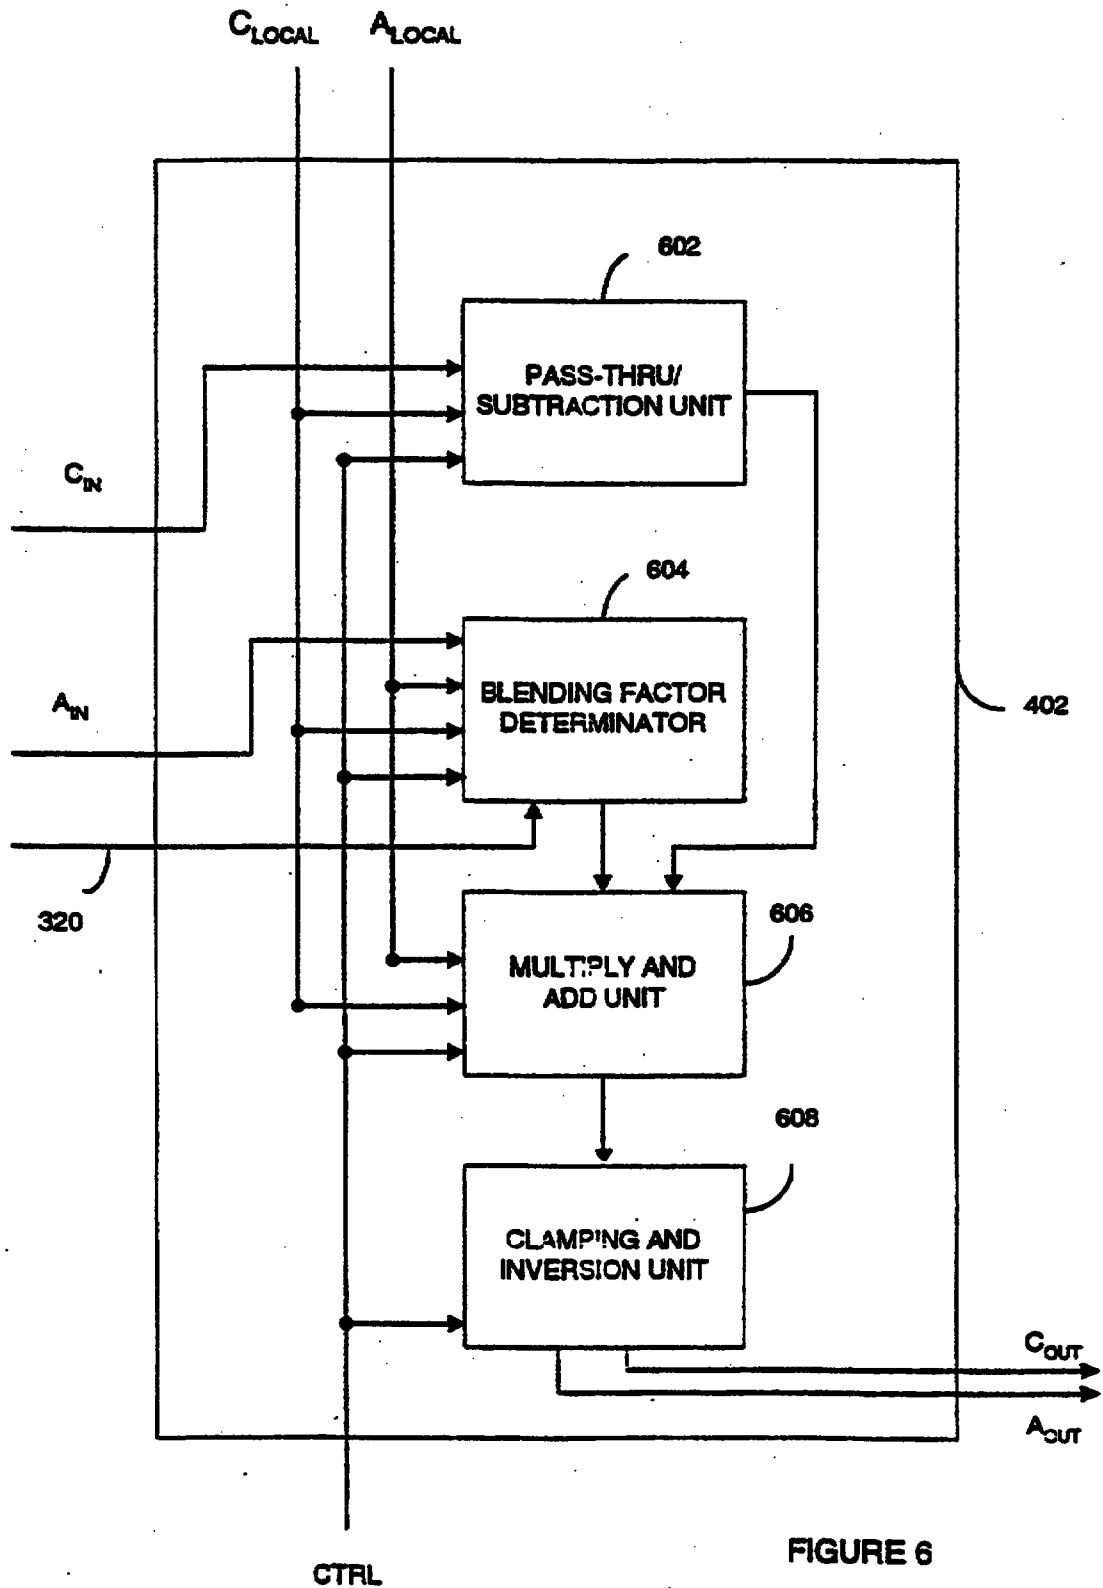


FIGURE 6

7/8

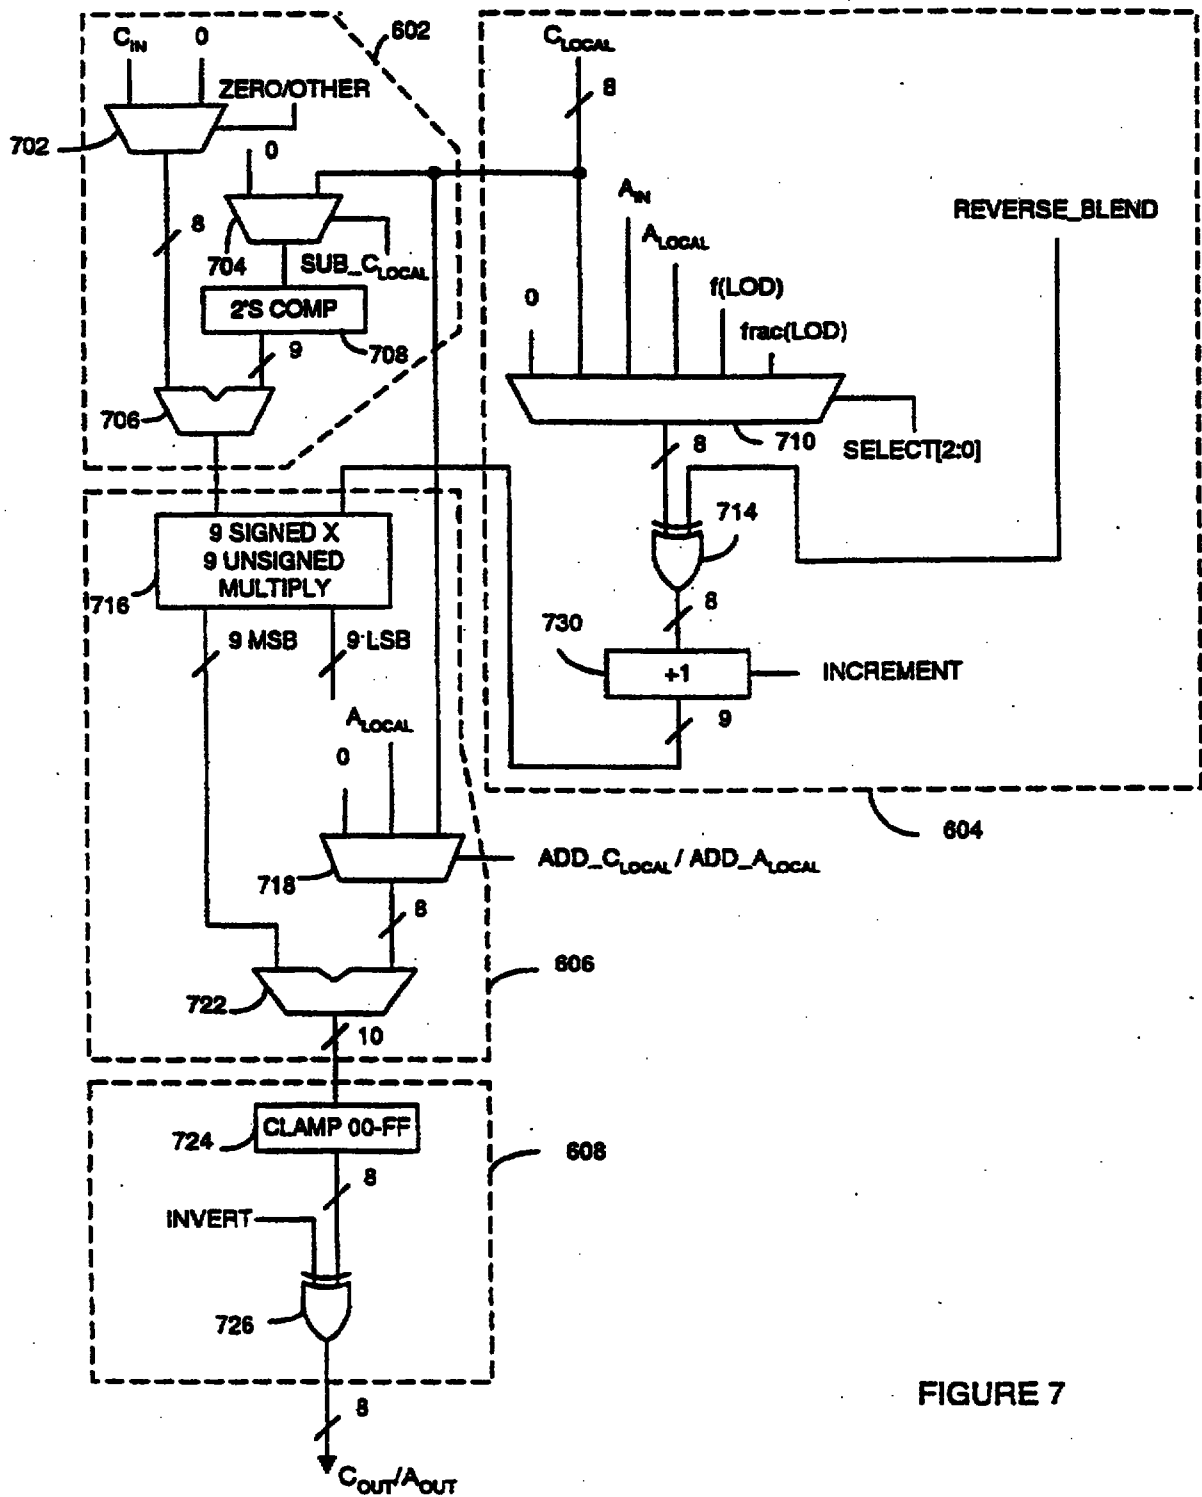


FIGURE 7

8/8


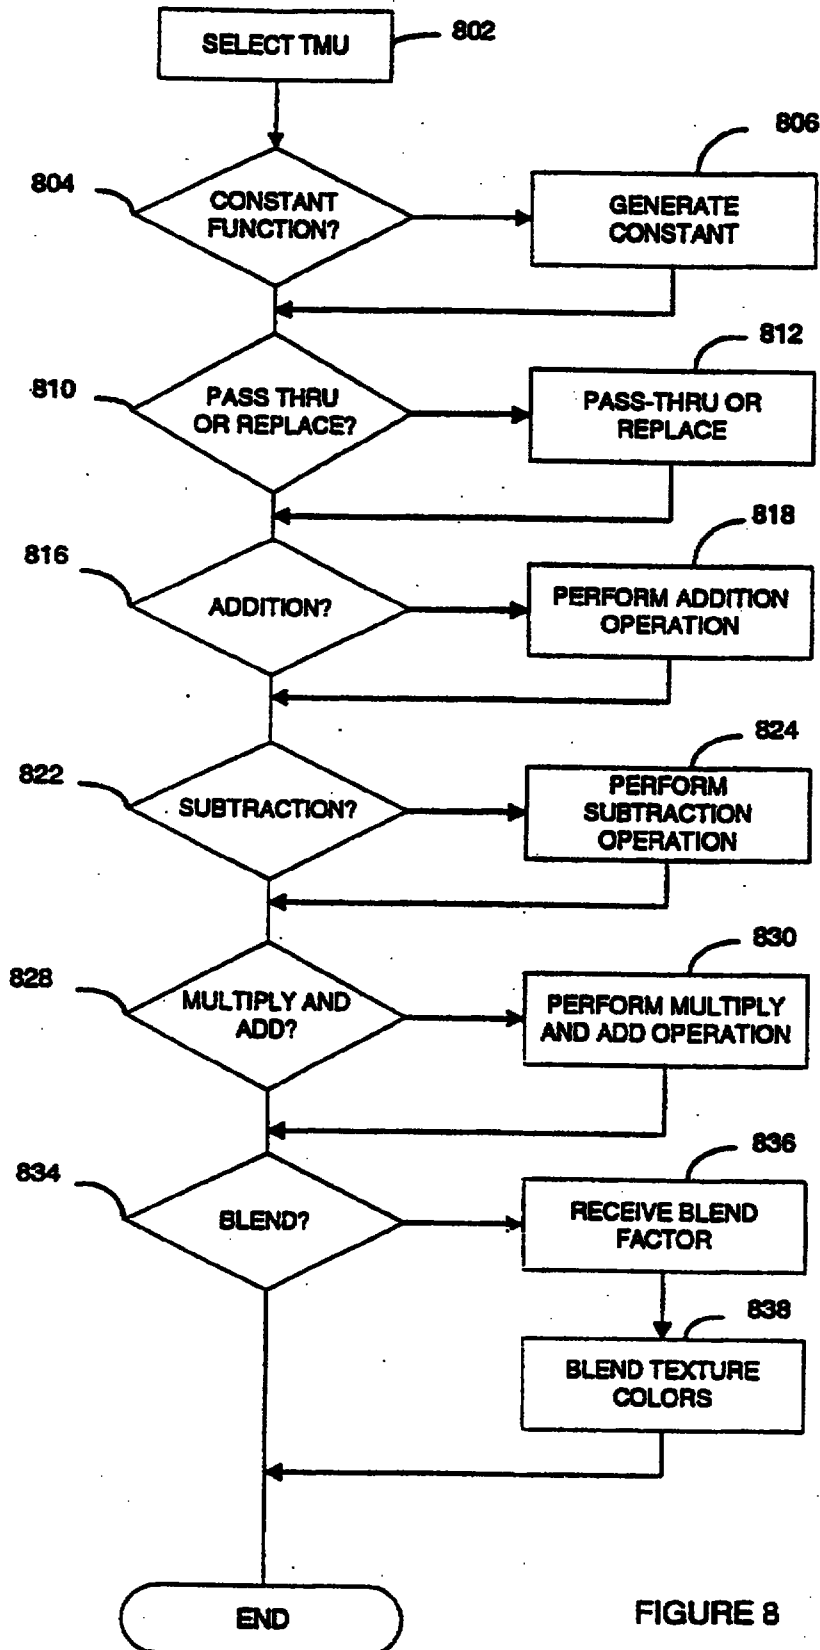


FIGURE 8



CLAIMS

1. An apparatus, receiving a plurality of texture signals each representing a texture, for combining signals representing at least three of said textures during a single pixel rendering pass, the apparatus comprising:

a first texture composite unit, disposed to receive a first texture signal and a second texture signal of said plurality of texture signals, said first and second texture signals representing independent textures, and a first control signal representing a first relationship between said first texture signal and said second texture signal, for combining said first texture signal and said second texture signal in accordance with said first relationship to generate a first output texture signal;

a second texture composite unit, disposed to receive said first output texture signal, a third texture signal of said plurality of texture signals, and a second control signal representing a second relationship between said first output texture signal and said third texture signal, for combining said first output texture signal and said third texture signal in accordance with said second relationship to generate a second output texture signal, wherein said second output texture signal is generated from said first, second, and third texture signals in a single pixel rendering pass.

2. The apparatus of claim 1, wherein said first texture signal comprises a first texture color signal and a first texture alpha signal and said second texture signal comprises a second texture color signal and a second texture alpha signal, the apparatus further comprising:





02 OCT 1998

a subtraction unit, having the first texture color signal and the second texture color signal as inputs, for subtracting said first texture color signal from said second texture color signal.

3. The apparatus of claim 2, further comprising:

a multiplication and add unit, for multiplying the second texture signal with one of said first texture color signal, said first texture alpha signal, said second texture alpha signal, and a level-of-detail signal, and adding one of said first texture color signal and a third signal.

4. The apparatus of claim 2, further comprising:

a multiplication unit, for multiplying said second texture color signal and one of said first texture color signal, said first texture alpha signal, said second texture alpha signal, and a level-of-detail signal.


5. The apparatus of claim 4, further comprising:

a constant generating unit, for generating a signal representing a predefined value.

6. The apparatus of claim 4, further comprising:

a pass-thru unit, coupled to said first texture signal, for outputting the first texture signal.



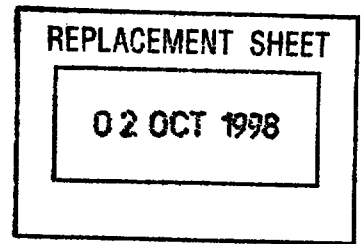

7. The apparatus of claim 1, wherein the first texture signal and the second texture signal include four texture component signals.

8. The apparatus of claim 7, wherein said four texture component signals include a red color signal, a green color signal, a blue color signal, and an alpha color signal.

9. The apparatus of claim 7, further comprising four texture combine subunits, each texture combine subunit associated with one of said four texture component signals, each of said texture combine subunits having said first blend factor determinator, said blending unit, and said addition unit.

10. The apparatus of claim 9, wherein each of said texture combine subunits receive a control signal, and performs one of the blend function and the add function in response to said control signal in a single pixel rendering pass.

11. The apparatus of claim 9, wherein two or more of said texture combine subunits receive a first control signal and performs one of the blend function and the add function in response to said first control signal in a single pixel rendering pass.





12. The apparatus of claim 1, further comprising a first storage unit coupled to said first texture composite unit and a second storage unit coupled to said second texture composite unit, said first storage unit storing a representation of a first mipmap level, said second storage unit storing a representation of a second mipmap level.

13. The apparatus of claim 12, wherein said blending factor is equal to a selected composite factor representing one of said first mipmap level and a mid-level mipmap level between said first mipmap level and said second mipmap level, the first texture color signal representing said first mipmap level, the second texture color signal representing said second mipmap level.


14. The apparatus of claim 1, wherein said second texture composite unit receives said first output texture signal directly from said first texture composite unit.

15. The apparatus of claim 14, wherein said first and second control signals are the same.

16. The apparatus of claim 14, wherein said first and second control signals are different.

17. The apparatus of claim 1, wherein additional texture composite units are sequentially connected such that one additional texture signal is combined by each additional



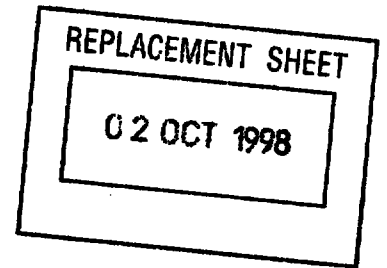

texture composite unit during a single pixel rendering pass.

18. The apparatus of claim 1, wherein said first texture composite unit includes:

a first blend factor determinator, for determining a first blend factor, said first blend factor representing a blending relationship between said first texture signal and said second texture signal;

a first blending unit, coupled to said first blend factor determinator, for blending said first texture signal and said second texture signal based upon said first blend factor; and

a first addition unit, having the first texture signal and the second texture signal as inputs, for adding the first output texture signal and the second texture signal.

19. A computer based method for combining at least three texture signals, in a single pixel rendering pass, the computer having a first and second texture composite units, comprising the steps of:

receiving a first of said texture signals;

receiving a second of said texture signals, said first and second texture signals representing independent textures;

receiving a first control signal representing a first relationship between said first texture signal and said second texture signal; and


combining said first texture signal and said second texture signal in accordance with said first relationship to generate a first output texture signal;

receiving a third of said texture signals;

receiving a second control signal representing a second relationship between said first

This Sheet Has Been Replaced



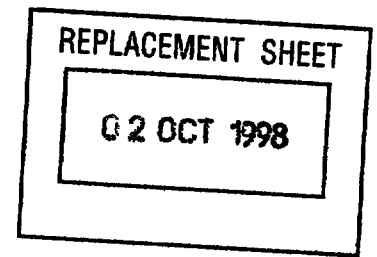

output texture signal and said third texture signal;

combining said first output texture signal and said third texture signal in accordance with said second relationship to generate a second output texture signal;

wherein said second output texture signal is generated from said first, second, and third texture signals in a single pixel rendering pass.

20. The method of claim 19, further comprising the steps of:

determining a blend factor representing a relationship between said first texture signal and the second texture signal; and

performing one of a blending operation and an addition operation in a single texture rendering pass in response to said second control signal, said blending operation combining said first texture signal and said second texture signal according to said blend factor, said addition operation adding said first texture signal to said second texture signal to generate said first texture output signal.

21. The method of claim 20, further comprising the step of:


performing a subtraction operation on said first texture signal and said second texture signal in response to said first control signal.

22. The method of claim 20, further comprising the step of:

performing a multiplication operation on said second texture color signal and one of said first texture color signal, said first texture alpha signal, said second texture alpha signal, and a level-of-detail signal in response to said first control signal.



This Sheet Has Been Replaced

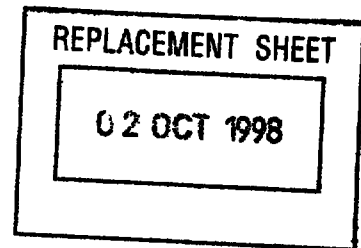

7

23. The method of claim 20, further comprising the step of:
generating one of a binary one signal and a binary zero signal in response to said first control signal.

24. The method of claim 19, wherein a second texture composite unit receives said first output texture signal directly from a first texture composite unit.

25. The method of claim 24, wherein said first and second control signals are the same.

26. The method of claim 24, wherein said first and second control signals are different.

27. The method of claim 19, wherein additional texture composite units are sequentially connected to each other such that one additional texture is combined by each texture composite unit during a single pixel rendering pass.

28. The method of claim 19 wherein said second relationship can be represented by at least one of a blending operation, a multiplication operation, a subtraction operation, and an addition operation.



* C L M S *



02 OCT 1998


29. An apparatus receiving a source image signal (226A/218A - Clocal) and a plurality of texture signals each representing a texture, for combining the source image signal (226A/218A - Clocal) with signals representing at least two of the textures during a single pixel rendering pass, the apparatus comprising:

a first texture composite unit (304/210B), disposed to receive the source image signal (226A/218A - Clocal) and a first texture signal (226B/228B) of the plurality of textural signals, the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) representing independent textures, and a first control signal (216 - CTRL) representing a first relationship between the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B), for combining the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) in accordance with the first relationship to generate a first output texture signal (218B/220B);

a second texture composite unit (304/210C), disposed to receive the first output texture signal (218B/220B), a second texture signal (226C/228C) of the plurality of texture signals, and a second control signal (216 - CTRL) representing a second relationship between the first output texture signal (218B/220B) and the second texture signal (226C/228C), for combining the first output texture signal (218B/220B) and the second texture signal (226C/228C) in accordance with the second relationship to generate a second output texture signal (218C/220C), wherein the second output texture signal (218C/220C) is generated from the source image signal (226A/218A - Clocal), the first texture signal (226B/228B), and the second texture signal (226C/228C) in a single pixel rendering pass.

30. The apparatus of claim 29, wherein the second texture composite unit (304/210C) receives the first output texture signal (218B/220B) directly from the first texture composite unit



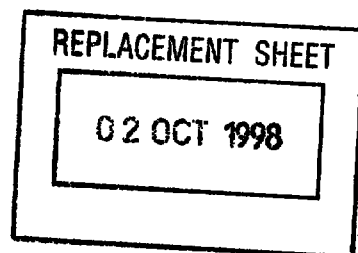

(304/210B).

31. The apparatus of claim 30, wherein the first control signal (216 - CTRL) and the second control signal (216 - CTRL) are the same.

32. The apparatus of claim 30, wherein the first control signal (216 - CTRL) and the second control signal (216 - CTRL) are different.

33. The apparatus of claim 29, wherein additional texture composite units are sequentially connected such that one additional texture signal is combined by each additional texture composite unit during a single pixel rendering pass.

34. The apparatus of claim 29, wherein the source image signal (226A/218A - Clocal) comprises a source image color signal and a source image alpha signal and the first texture signal (226B/228B) comprises a first texture color signal and a first texture alpha signal, the apparatus further comprising.

a subtraction unit (508), having the source image color signal and the first texture color signal as inputs, for subtracting the source image color signal from the first texture color signal.

35. The apparatus of claim 29, wherein the source image signal (226A/218A - Clocal) comprises a source image color signal and a source image alpha signal and the first texture signal (226B/228B) comprises a first texture color signal and a first texture alpha signal, the apparatus further comprising:

a multiplication and add unit (504), for multiplying the first texture signal (226B/228B) with one of the source image color signal, the first texture alpha signal, the second texture alpha

This Sheet Has Been Replaced





02 OCT 1998

signal, and a level-of-detail signal (320), and adding one of the source image color signal and a third signal.

36. The apparatus of claim 29, wherein the source image signal (226A/218A - Clocal) comprises a source image color signal and a source image alpha signal and the first texture signal (226B/228B) comprises a first texture color signal and a first texture alpha signal, the apparatus further comprising:

a multiplication unit (504), for multiplying the first texture color signal and one of the source image color signal, the first texture alpha signal, the second texture alpha signal, and a level-of-detail signal (320).

37. The apparatus of claim 36, further comprising:

a constant generating unit (502), for generating a signal representing a predefined value.

38. The apparatus of claim 36, further comprising:

a pass-thru unit (502), coupled to the source image signal (226A/218A - Clocal), for outputting the source image signal (226A/218A - Clocal).

39. The apparatus of claim 29, wherein the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) each include four component signals.

40. The apparatus of claim 39, wherein the four component signals include a red color signal, a green color signal, a blue color signal, and an alpha color signal.

41. The apparatus of claim 39, wherein each texture composite unit further comprises





02 OCT 1998

four texture combine subunits (402A-D), each texture combine subunit associated with one of the four component signals, each of the texture combine subunits (402A-D) having a first blend factor determinator (604), a blending unit (510), and an addition unit (506).

42. The apparatus of claim 41, wherein each of the texture combine subunits (402A-D) receives a control signal (216 - CTRL), and performs at least one of the blend function and the add function in response to the control signal (216 - CTRL) in a single pixel rendering pass.

43. The apparatus of claim 41, wherein two or more of the texture combine subunits (402A-D) receive a first control signal (216 - CTRL) and perform at least one of the blend function and the add function in response to the first control signal (216 - CTRL) in a single pixel rendering pass.

44. The apparatus of claim 29, further comprising a first storage unit (212B) coupled to the first texture composite unit (304/210B) and a second storage unit (212C) coupled to the second texture composite unit (304/210C), the first storage unit (212B) storing a representation of a first mipmap level, the second storage unit (212C) storing a representation of a second mipmap level.

45. The apparatus of claim 44, wherein the first texture composite unit (304/210B) includes:

a first blend factor determinator (604), for determining a first blend factor, the first blend factor representing a blending relationship between the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B);

This Sheet Has Been Replaced





02 OCT 1998

a first blending unit (510), coupled to the first blend factor determinator (604), for blending the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) based upon the first blend factor; and

a first addition unit (506), having the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) as inputs, for adding the first output texture signal (218B/220B) and the first texture signal (226B/228B).

46. The apparatus of claim 45, wherein the blending factor is equal to a selected composite factor representing one of the first mipmap level and a mid-level mipmap level between the first mipmap level and the second mipmap level, the source image color signal representing the first mipmap level, the first texture color signal representing the second mipmap level.

47. The apparatus of claim 45, wherein a texture effect is indicated by either or both of the first control signal (216 - CTRL) and the second control signal (216 - CTRL).

48. The apparatus of claim 47, wherein the texture effect is one or both of specular light reflections and diffuse light reflections.

49. A computer based method for combining at least two texture signals, in a single pixel rendering pass, the computer having a first texture composite unit (304/210B) and a second texture composite unit (304/210C), comprising the steps of:

(a) receiving a source image signal (226A/218A - Clocal);

(b) receiving a first texture signal (226B/228B) representing an independent texture;





02 OCT 1998

(c) receiving a first control signal (216 - CTRL) representing a first relationship between the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B); and

(d) combining the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) in accordance with the first relationship to generate a first output texture signal (218B/220B);

(e) receiving a second texture signal (226C/228C);

(f) receiving a second control signal (216 - CTRL) representing a second relationship between the first output texture signal (218B/220B) and the second texture signal (226C/228C); and

(g) combining the first output texture signal (218B/220B) and the second texture signal (226C/228C) in accordance with the second relationship to generate a second output texture signal (218C/220C);

wherein the second output texture signal (218C/220C) is generated from the source image signal (226A/218A - Clocal), the first texture signal (226B/228B), and the second texture signal (226C/228C) in a single pixel rendering pass.

50. The method of claim 49, wherein the first and second control signal (216 - CTRLs) are the same.

51. The method of claim 49, wherein the first and second control signal (216 - CTRLs) are the different.

52. The method of claim 49, wherein steps (e)-(g) are sequentially repeated for each generated output texture signal and additional texture signals such that one additional texture is combined by each repetition of steps (e)-(g) during a single pixel rendering pass.

This Sheet Has Been Replaced





02 OCT 1998

53. The method of claim 49, wherein the second relationship can be represented by at least one of a blending operation, a multiplication operation, a subtraction operation, and an additional operation.

54. The method of claim 49, further comprising the steps of:

determining a blend factor representing a relationship between the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B); and


performing one of a blending operation and an addition operating in a single texture rendering pass in response to the second control signal (216 - CTRL), the blending operation combining the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) according to the blend factor, the additional operation adding the source image signal (226A/218A - Clocal) to the first texture signal (226B/228B) to generate the first texture output signal.

55. The method of claim 54, further comprising the step of:

performing a subtraction operation on the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) in response to the first control signal (216 - CTRL).

56. The method of claim 54, wherein the source image signal (226A/218A - Clocal) comprises a source image color signal and a source image alpha signal, the first texture signal (226B/228B) comprises a first texture color signal and a first texture alpha signal, the second texture signal (226C/228C) comprises a second texture color signal and a second texture alpha signal, and further comprising the step of:






performing a multiplication operation on the first texture color signal and one of the source image color signal, the source image alpha signal, the first texture alpha signal, and a level-of-detail signal (320) in response to the first control signal (216 - CTRL).

57. The method of claim 54, further comprising the step of:

generating one of a binary one signal and a binary zero signal in response to the first control signal (216 - CTRL).

This Sheet Has Been Replaced



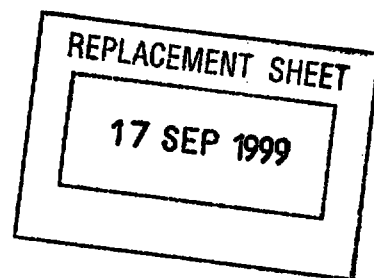

CLAIMS

1. An apparatus, receiving a plurality of texture signals each representing a texture, for combining signals representing at least three of said textures during a single pixel rendering pass, the apparatus comprising:

a first texture composite unit, disposed to receive a first texture signal and a second texture signal of said plurality of texture signals, said first and second texture signals representing independent textures, and a first control signal representing a first relationship between said first texture signal and said second texture signal, for combining said first texture signal and said second texture signal in accordance with said first relationship to generate a first output texture signal;

a second texture composite unit, disposed to receive said first output texture signal, a third texture signal of said plurality of texture signals, and a second control signal representing a second relationship between said first output texture signal and said third texture signal, for combining said first output texture signal and said third texture signal in accordance with said second relationship to generate a second output texture signal, wherein said second output texture signal is generated from said first, second, and third texture signals in a single pixel rendering pass.

2. The apparatus of claim 1, wherein said first texture signal comprises a first texture color signal and a first texture alpha signal and said second texture signal comprises a second texture color signal and a second texture alpha signal, the apparatus further comprising:



17 SEP 1999

a subtraction unit, having the first texture color signal and the second texture color signal as inputs, for subtracting said first texture color signal from said second texture color signal.

3. The apparatus of claim 2, further comprising:

a multiplication and add unit, for multiplying the second texture signal with one of said first texture color signal, said first texture alpha signal, said second texture alpha signal, and a level-of-detail signal, and adding one of said first texture color signal and a third signal.

4. The apparatus of claim 2, further comprising:


a multiplication unit, for multiplying said second texture color signal and one of said first texture color signal, said first texture alpha signal, said second texture alpha signal, and a level-of-detail signal.

5. The apparatus of claim 4, further comprising:


a constant generating unit, for generating a signal representing a predefined value.

6. The apparatus of claim 4, further comprising:

a pass-thru unit, coupled to said first texture signal, for outputting the first texture signal.

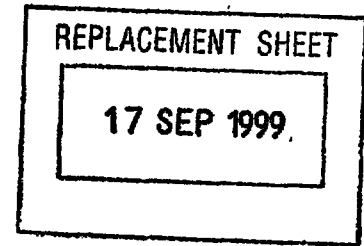

7. The apparatus of claim 1, wherein the first texture signal and the second texture signal include four texture component signals.
8. The apparatus of claim 7, wherein said four texture component signals include a red color signal, a green color signal, a blue color signal, and an alpha color signal.
9. The apparatus of claim 7, further comprising four texture combine subunits, each texture combine subunit associated with one of said four texture component signals, each of said texture combine subunits having said first blend factor determinator, said blending unit, and said addition unit.
10. The apparatus of claim 9, wherein each of said texture combine subunits receive a control signal, and performs one of the blend function and the add function in response to said control signal in a single pixel rendering pass.
11. The apparatus of claim 9, wherein two or more of said texture combine subunits receive a first control signal and performs one of the blend function and the add function in response to said first control signal in a single pixel rendering pass.

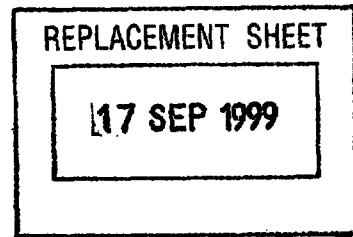

12. The apparatus of claim 1, further comprising a first storage unit coupled to said first texture composite unit and a second storage unit coupled to said second texture composite unit, said first storage unit storing a representation of a first mipmap level, said second storage unit storing a representation of a second mipmap level.


13. The apparatus of claim 12, wherein said blending factor is equal to a selected composite factor representing one of said first mipmap level and a mid-level mipmap level between said first mipmap level and said second mipmap level, the first texture color signal representing said first mipmap level, the second texture color signal representing said second mipmap level.

14. The apparatus of claim 1, wherein said second texture composite unit receives said first output texture signal directly from said first texture composite unit.

15. The apparatus of claim 14, wherein said first and second control signals are the same.

16. The apparatus of claim 14, wherein said first and second control signals are different.

17. The apparatus of claim 1, wherein additional texture composite units are sequentially connected such that one additional texture signal is combined by each additional

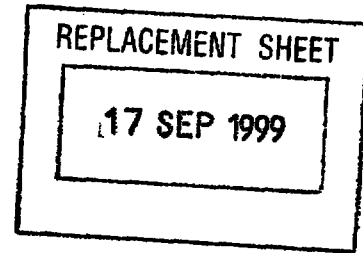


texture composite unit during a single pixel rendering pass.

18. The apparatus of claim 1, wherein said first texture composite unit includes:
- a first blend factor determinator, for determining a first blend factor, said first blend factor representing a blending relationship between said first texture signal and said second texture signal;
 - a first blending unit, coupled to said first blend factor determinator, for blending said first texture signal and said second texture signal based upon said first blend factor; and
 - a first addition unit, having the first texture signal and the second texture signal as inputs, for adding the first output texture signal and the second texture signal.

19. A computer based method for combining at least three texture signals, in a single pixel rendering pass, the computer having a first and second texture composite units, comprising the steps of:

- receiving a first of said texture signals;
- receiving a second of said texture signals, said first and second texture signals representing independent textures;
- receiving a first control signal representing a first relationship between said first texture signal and said second texture signal; and
- combining said first texture signal and said second texture signal in accordance with said first relationship to generate a first output texture signal;
- receiving a third of said texture signals;
- receiving a second control signal representing a second relationship between said first

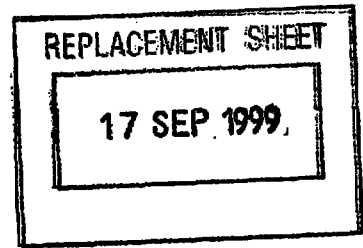

output texture signal and said third texture signal;

combining said first output texture signal and said third texture signal in accordance with said second relationship to generate a second output texture signal;

wherein said second output texture signal is generated from said first, second, and third texture signals in a single pixel rendering pass.

20. The method of claim 19, further comprising the steps of:

determining a blend factor representing a relationship between said first texture signal and the second texture signal; and


performing one of a blending operation and an addition operation in a single texture rendering pass in response to said second control signal, said blending operation combining said first texture signal and said second texture signal according to said blend factor, said addition operation adding said first texture signal to said second texture signal to generate said first texture output signal.

21. The method of claim 20, further comprising the step of:


performing a subtraction operation on said first texture signal and said second texture signal in response to said first control signal.

22. The method of claim 20, further comprising the step of:

performing a multiplication operation on said second texture color signal and one of said first texture color signal, said first texture alpha signal, said second texture alpha signal, and a level-of-detail signal in response to said first control signal.

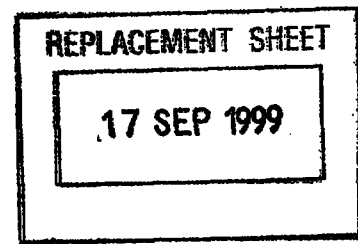

23. The method of claim 20, further comprising the step of:
generating one of a binary one signal and a binary zero signal in response to said first control signal.
24. The method of claim 19, wherein a second texture composite unit receives said first output texture signal directly from a first texture composite unit.
25. The method of claim 24, wherein said first and second control signals are the same.
26. The method of claim 24, wherein said first and second control signals are different.
27. The method of claim 19, wherein additional texture composite units are sequentially connected to each other such that one additional texture is combined by each texture composite unit during a single pixel rendering pass.
28. The method of claim 19 wherein said second relationship can be represented by at least one of a blending operation, a multiplication operation, a subtraction operation, and an addition operation.

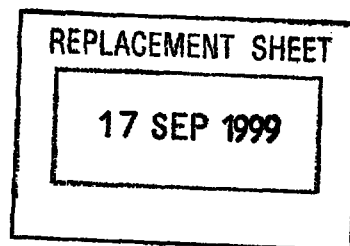


29. An apparatus receiving a source image signal (226A/218A - Clocal) and a plurality of texture signals each representing a texture, for combining the source image signal (226A/218A - Clocal) with signals representing at least two of the textures during a single pixel rendering pass, the apparatus comprising:

a first texture composite unit (304/210B), disposed to receive the source image signal (226A/218A - Clocal) and a first texture signal (226B/228B) of the plurality of textural signals, the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) representing independent textures, and a first control signal (216 - CTRL) representing a first relationship between the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B), for combining the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) in accordance with the first relationship to generate a first output texture signal (218B/220B);

a second texture composite unit (304/210C), disposed to receive the first output texture signal (218B/220B), a second texture signal (226C/228C) of the plurality of texture signals, and a second control signal (216 - CTRL) representing a second relationship between the first output texture signal (218B/220B) and the second texture signal (226C/228C), for combining the first output texture signal (218B/220B) and the second texture signal (226C/228C) in accordance with the second relationship to generate a second output texture signal (218C/220C), wherein the second output texture signal (218C/220C) is generated from the source image signal (226A/218A - Clocal), the first texture signal (226B/228B), and the second texture signal (226C/228C) in a single pixel rendering pass.

30. The apparatus of claim 29, wherein the second texture composite unit (304/210C) receives the first output texture signal (218B/220B) directly from the first texture composite unit

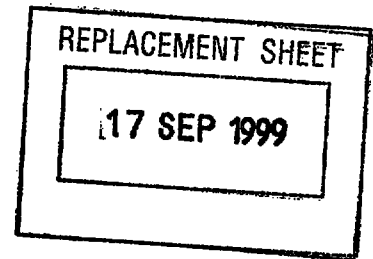

(304/210B).

31. The apparatus of claim 30, wherein the first control signal (216 - CTRL) and the second control signal (216 - CTRL) are the same.

32. The apparatus of claim 30, wherein the first control signal (216 - CTRL) and the second control signal (216 - CTRL) are different.

33. The apparatus of claim 29, wherein additional texture composite units are sequentially connected such that one additional texture signal is combined by each additional texture composite unit during a single pixel rendering pass.

34. The apparatus of claim 29, wherein the source image signal (226A/218A - Clocal) comprises a source image color signal and a source image alpha signal and the first texture signal (226B/228B) comprises a first texture color signal and a first texture alpha signal, the apparatus further comprising:

a subtraction unit (508), having the source image color signal and the first texture color signal as inputs, for subtracting the source image color signal from the first texture color signal.

35. The apparatus of claim 29, wherein the source image signal (226A/218A - Clocal) comprises a source image color signal and a source image alpha signal and the first texture signal (226B/228B) comprises a first texture color signal and a first texture alpha signal, the apparatus further comprising:

a multiplication and add unit (504), for multiplying the first texture signal (226B/228B) with one of the source image color signal, the first texture alpha signal, the second texture alpha



17 SEP 1999

signal, and a level-of-detail signal (320), and adding one of the source image color signal and a third signal.

36. The apparatus of claim 29, wherein the source image signal (226A/218A - Clocal) comprises a source image color signal and a source image alpha signal and the first texture signal (226B/228B) comprises a first texture color signal and a first texture alpha signal, the apparatus further comprising:

a multiplication unit (504), for multiplying the first texture color signal and one of the source image color signal, the first texture alpha signal, the second texture alpha signal, and a level-of-detail signal (320).

37. The apparatus of claim 36, further comprising:

a constant generating unit (502), for generating a signal representing a predefined value.


38. The apparatus of claim 36, further comprising:

a pass-thru unit (502), coupled to the source image signal (226A/218A - Clocal), for outputting the source image signal (226A/218A - Clocal).

39. The apparatus of claim 29, wherein the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) each include four component signals.

40. The apparatus of claim 39, wherein the four component signals include a red color signal, a green color signal, a blue color signal, and an alpha color signal.

41. The apparatus of claim 39, wherein each texture composite unit further comprises

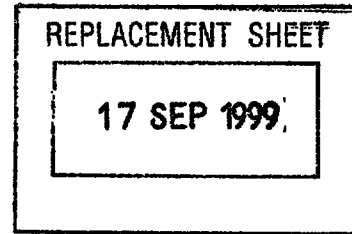

four texture combine subunits (402A-D), each texture combine subunit associated with one of the four component signals, each of the texture combine subunits (402A-D) having a first blend factor determinator (604), a blending unit (510), and an addition unit (506).


42. The apparatus of claim 41, wherein each of the texture combine subunits (402A-D) receives a control signal (216 - CTRL), and performs at least one of the blend function and the add function in response to the control signal (216 - CTRL) in a single pixel rendering pass.

43. The apparatus of claim 41, wherein two or more of the texture combine subunits (402A-D) receive a first control signal (216 - CTRL) and perform at least one of the blend function and the add function in response to the first control signal (216 - CTRL) in a single pixel rendering pass.

44. The apparatus of claim 29, further comprising a first storage unit (212B) coupled to the first texture composite unit (304/210B) and a second storage unit (212C) coupled to the second texture composite unit (304/210C), the first storage unit (212B) storing a representation of a first mipmap level, the second storage unit (212C) storing a representation of a second mipmap level.

45. The apparatus of claim 44, wherein the first texture composite unit (304/210B) includes:

a first blend factor determinator (604), for determining a first blend factor, the first blend factor representing a blending relationship between the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B);

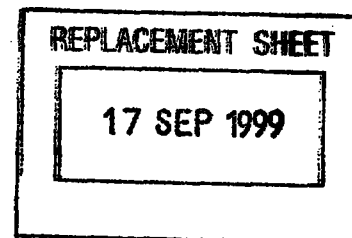

a first blending unit (510), coupled to the first blend factor determinator (604), for blending the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) based upon the first blend factor; and

a first addition unit (506), having the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) as inputs, for adding the first output texture signal (218B/220B) and the first texture signal (226B/228B).

46. The apparatus of claim 45, wherein the blending factor is equal to a selected composite factor representing one of the first mipmap level and a mid-level mipmap level between the first mipmap level and the second mipmap level, the source image color signal representing the first mipmap level, the first texture color signal representing the second mipmap level.

47. The apparatus of claim 45, wherein a texture effect is indicated by either or both of the first control signal (216 - CTRL) and the second control signal (216 - CTRL).

48. The apparatus of claim 47, wherein the texture effect is one or both of specular light reflections and diffuse light reflections.

49. A computer based method for combining at least two texture signals, in a single pixel rendering pass, the computer having a first texture composite unit (304/210B) and a second texture composite unit (304/210C), comprising the steps of:

- (a) receiving a source image signal (226A/218A - Clocal);
- (b) receiving a first texture signal (226B/228B) representing an independent texture;



17 SEP 1999

(c) receiving a first control signal (216 - CTRL) representing a first relationship between the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B); and

(d) combining the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) in accordance with the first relationship to generate a first output texture signal (218B/220B);

(e) receiving a second texture signal (226C/228C);

(f) receiving a second control signal (216 - CTRL) representing a second relationship between the first output texture signal (218B/220B) and the second texture signal (226C/228C); and


(g) combining the first output texture signal (218B/220B) and the second texture signal (226C/228C) in accordance with the second relationship to generate a second output texture signal (218C/220C);

wherein the second output texture signal (218C/220C) is generated from the source image signal (226A/218A - Clocal), the first texture signal (226B/228B), and the second texture signal (226C/228C) in a single pixel rendering pass.

50. The method of claim 49, wherein the first and second control signal (216 - CTRLs) are the same.

51. The method of claim 49, wherein the first and second control signal (216 - CTRLs) are the different.

52. The method of claim 49, wherein steps (e)-(g) are sequentially repeated for each generated output texture signal and additional texture signals such that one additional texture is combined by each repetition of steps (e)-(g) during a single pixel rendering pass.

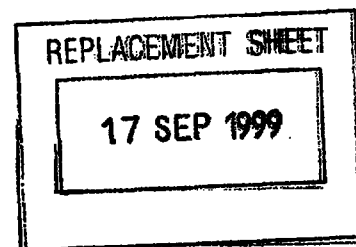

53. The method of claim 49, wherein the second relationship can be represented by at least one of a blending operation, a multiplication operation, a subtraction operation, and an additional operation.

54. The method of claim 49, further comprising the steps of:


determining a blend factor representing a relationship between the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B); and

performing one of a blending operation and an addition operating in a single texture rendering pass in response to the second control signal (216 - CTRL), the blending operation combining the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) according to the blend factor, the additional operation adding the source image signal (226A/218A - Clocal) to the first texture signal (226B/228B) to generate the first texture output signal.

55. The method of claim 54, further comprising the step of:

performing a subtraction operation on the source image signal (226A/218A - Clocal) and the first texture signal (226B/228B) in response to the first control signal (216 - CTRL).

56. The method of claim 54, wherein the source image signal (226A/218A - Clocal) comprises a source image color signal and a source image alpha signal, the first texture signal (226B/228B) comprises a first texture color signal and a first texture alpha signal, the second texture signal (226C/228C) comprises a second texture color signal and a second texture alpha signal, and further comprising the step of:

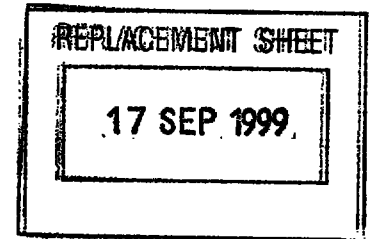

performing a multiplication operation on the first texture color signal and one of the source image color signal, the source image alpha signal, the first texture alpha signal, and a level-of-detail signal (320) in response to the first control signal (216 - CTRL).

57. The method of claim 54, further comprising the step of:

generating one of a binary one signal and a binary zero signal in response to the first control signal (216 - CTRL).

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: G06T 11/40		A1	(11) International Publication Number: WO 97/16803
			(43) International Publication Date: 9 May 1997 (09.05.97)
(21) International Application Number: PCT/US96/17401		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 1 November 1996 (01.11.96)			
(30) Priority Data: 08/552,740 3 November 1995 (03.11.95) US			
(71) Applicant: 3DFX INTERACTIVE, INCORPORATED [US/US]; 4435 Fortran Drive, San Jose, CA 95134 (US).			
(72) Inventors: TAROLLI, Gary; 788 Strawberry Hill Road, Concord, MA 01742 (US); SELLERS, Scott; 1495 Woodland Avenue, Menlo Park, CA 94029 (US); MARGESON, James, E., III; 1591 Santa Rosa Court, Santa Clara, CA 95051 (US).			
(74) Agents: MCNELIS, John, T. et al.; Fenwick & West L.L.P., Suite 700, Two Palo Alto Square, Palo Alto, CA 94306 (US).		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: **TEXTURE COMPOSITING APPARATUS AND METHOD**

(57) Abstract

A texture compositing apparatus (figure 6) and method for combining multiple independent texture colors in a variety of ways in a single execution pass using a single texture compositing unit (TCU) (304) per texture. The TCU (304) receives a control signal, (216) a blend factor (320), a local data signal (C_{local}/A_{local}) (226C, 228C), and an output data signal (C_{in}/A_{in}) (218B, 220B) generated by another TCU, the local data signal and the output data signal represent a texture color in a RGBA format. Based upon the control signal (216), the TCU (304) can generate an output signal (218C, 220C) based on a variety of functions. The outputs that can be generated include but are not limited to: (1) zero; (2) one; (3) C_{in} ; (4) C_{local} ; (5) $C_{in} + C_{local}$; (6) $C_{in} - C_{local}$; (7) $C_{in} * C_{local}$; (8) $C_{in} * C_{local} + A_{local}$; (9) $C_{in} * A_{local} + C_{local}$; (10) $(C_{in} - C_{local}) * F_{blend} + C_{local}$; and (11) $(C_{in} - C_{local}) * (1 - F_{blend}) + C_{local}$. Another feature of the invention is that multiple TCUs can be serially coupled to enable addition texture colors to be combined in a single execution path.

