

(19) World Intellectual Property Organization
International Bureau



PCT



(43) International Publication Date
4 December 2008 (04.12.2008)

(10) International Publication Number
WO 2008/147406 A3

(51) International Patent Classification:
F16K 17/16 (2006.01)

(74) **Agent:** **SKOCH, Gregory, J.**; Hovey Williams LLP, 10801 Mastin Boulevard, Suite 1000, 84 Corporate Woods, Overland Park, KS 66210 (US).

(21) International Application Number: PCT/US2007/068670

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 10 May 2007 (10.05.2007)

(25) Filing Language: English

(26) **Publication Language:** English

(30) Priority Data:
11/465,274 17 August 2006 (17.08.2006) US

(71) Applicant (for all designated States except US): **FIKE CORPORATION** [US/US]; 704 SW 10th Street, Blue Springs, MO 64015 (US).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MK, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **ELJKELENBERG, Tom** [BE/BE]; Vijfhuizenstraat 39, B-2260 Westerlo (Zoerle-Parwijs) (BE). **JAKUS, Guy** [BE/BE]; Leiweg 23, B-1980 Zemst Belgium (BE). **DOM, Guido** [BE/BE]; Moleneinde 2, B-2250 Olen Belgium (BE).

Published:

— *with international search report*

[Continued on next page]

(54) Title: HIGH OVERPRESSURE VENT STRUCTURE HAVING SPRING STEEL RECLOSER PANEL

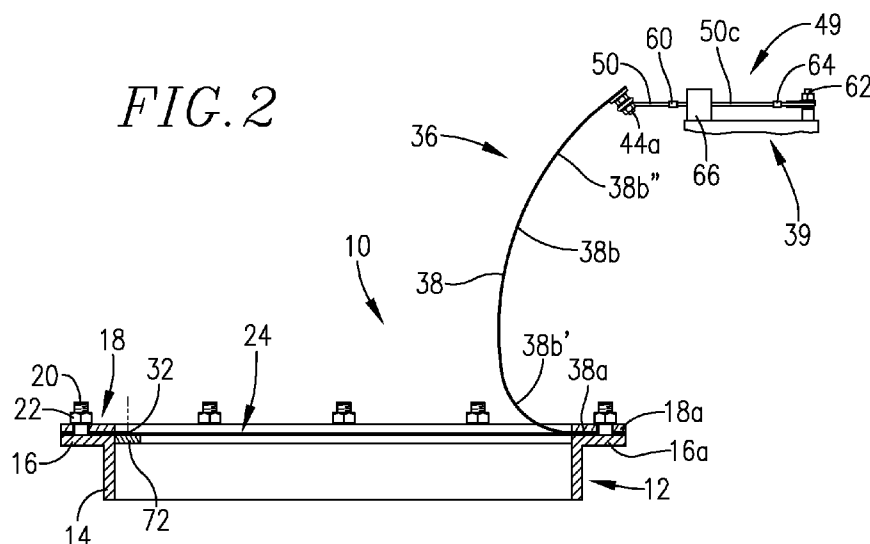

(57) Abstract: Apparatus for protecting a confined space having a vent aperture for relief of an overpressure condition and provided with a vent unit having a pressure relief portion normally closing the vent aperture is provided with recloser structure for generally closing off the vent aperture in the event of opening of the pressure relief portion of the vent unit. The recloser structure includes a resilient, flexible, spring steel recloser panel that is normally held in a bent condition out of closing relationship to the vent aperture. Releasable mechanism engages the recloser panel for normally retaining the panel in its open position. An actuator is connected to the releasable mechanism for actuating the latter to release the recloser panel for movement as a function of its inherent resilience into substantially closing relationship to the vent aperture after the relief portion of the vent unit has opened.



(88) Date of publication of the international search report:

5 February 2009