


9705727-7

RTMP
COPY**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B65D 27/00	A1	(11) International Publication Number: WO 96/33104 (43) International Publication Date: 24 October 1996 (24.10.96)
(21) International Application Number: PCT/US95/12564 (22) International Filing Date: 17 October 1995 (17.10.95) (30) Priority Data: 08/423,347 / 18 April 1995 (18.04.95) US (71) Applicant: REHRIG PACIFIC COMPANY, INC. [US/US]; 4010 East 26th Street, Los Angeles, CA 90023 (US). (72) Inventors: APPS, William, P.; 225 Lake Heights Drive, Alpharetta, GA 30202 (US). KOEFELDA, Gerald, R.; Apartment 334, 5501 Glenridge Drive, Atlanta, GA 30342 (US). (74) Agents: POTENZA, Joseph, M. et al.; Banner & Allegretti, Ltd., 11th floor, 1001 G Street, N.W., Washington, DC 20001-4597 (US).	(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, ARIPO patent (KE, MW, SD, SZ, UG), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: NESTABLE DISPLAY CRATE

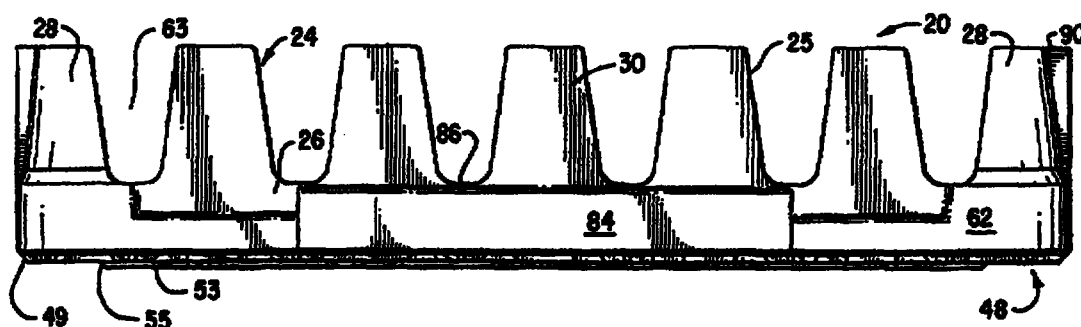

(57) Abstract

A low depth, nestable display crate (20) for bottles, preferably of single serve capacity, is integrally molded from plastic and comprises two basic components: a floor (22) and a wall structure (24) extending up from the floor and extending around the periphery of the floor (22). The floor (22) preferably has an open lattice design and includes container support areas. The bottom surface of the floor (22) is configured for accommodating the tops of bottles in a similar crate (20) underneath. The wall structure (24) comprises a lower wall portion adjacent the floor and a plurality of integrally formed pylons (28, 30, 31) arranged around the periphery of the crate. Handles are integrally formed to extend between pylons on opposing walls to provide handle bars flush with the tops of the pylons.