

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2004 (06.05.2004)

PCT

(10) International Publication Number
WO 2004/037500 A2

(51) International Patent Classification⁷:

B26B

(74) Agents: **ZOLTICK, Martin, M.**, et al.; Rothwell, Figg, Ernst & Manbeck, P.C., 1425 K Street, N.W., Suite 800, Washington, DC 20005 (US).

(21) International Application Number:

PCT/US2003/033726

(22) International Filing Date: 24 October 2003 (24.10.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10/280,469

25 October 2002 (25.10.2002)

US

(71) Applicant: **AFG INDUSTRIES, INC.** [US/US]; 1400 Lincoln Street, Kingsport, TN 37660 (US).

(72) Inventors: **PELCARSKY, Tom**; 37655 Windy Hill Lane, Solon, OH 44139 (US). **PELCARSKY, Wayne**; 7447 McLellan Drive, Walton Hills, OH 44146 (US). **ACKERMAN, Jason**; 3421 Beaver Trail, Unit D, Aurora, OH 44202 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: HAND APPLICATION TOOL FOR LAYING SEALANT SPACER STRIP ON GLASS OR LIKE MATERIAL

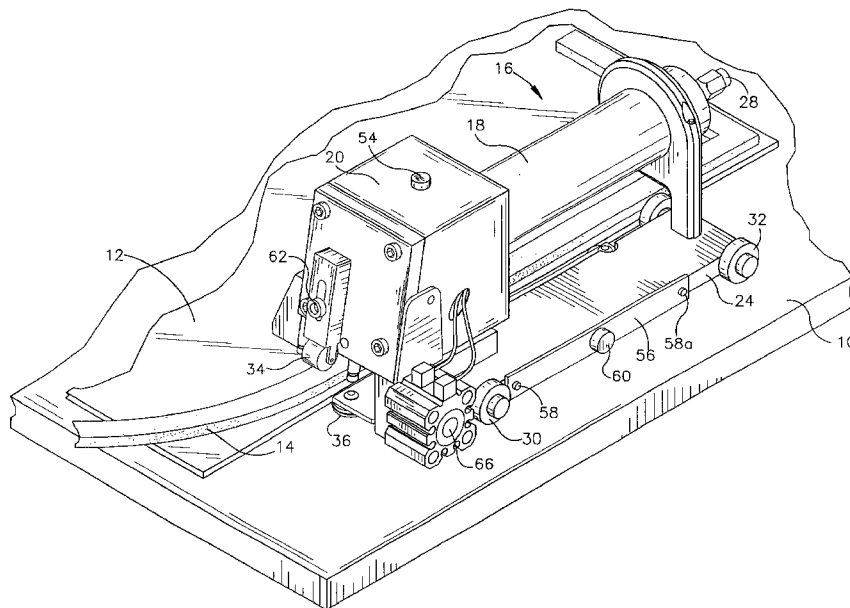

(57) Abstract: A hand application tool for laying a sealant spacer strip along a glass sheet for forming insulating glass units having a handle with first and second ends; a base having freely rotatable rollers connected to the first end of the handle; and a housing connected to the first end of said handle and to the base the housing having a positioning roller, at least one guide pin and a housing roller wherein the at least one guide pin and the housing roller form a guideway for deploying the adhesive strip and the housing roller provides pressure for applying the sealant spacer strip onto the glass sheet.

WO 2004/037500 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.