

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 April 2001 (19.04.2001)

PCT

(10) International Publication Number
WO 01/26520 A3

(51) International Patent Classification⁷: **A47J 31/44**,
31/06

[FR/CH]; Ch. de la Routiaz 2, CH-1806 St-Légier (CH).
STIEGER, Mischa [CH/CH]; Hagenbuchstrasse 30c,
CH-9000 St-Gallen (CH).

(21) International Application Number: PCT/EP00/09511

(22) International Filing Date:
28 September 2000 (28.09.2000)

(74) Agent: **THOMAS, Alain**; Avenue Nestlé, 55, CH-1800
Vevey (CH).

(25) Filing Language: English

(81) Designated States (*national*): AE, AU, BR, CA, CN, CZ,
HU, ID, IL, JP, MA, MX, NO, PL, SG, SI, SK, TR, UA,
US.

(26) Publication Language: English

(30) Priority Data:
99120443.9 14 October 1999 (14.10.1999) EP

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


Published:

(75) Inventors/Applicants (*for US only*): **YOAKIM, Alfred**

— with international search report

[Continued on next page]

(54) Title: COFFEE MACHINE WITH INTEGRATED STEAM DELIVERY DEVICE

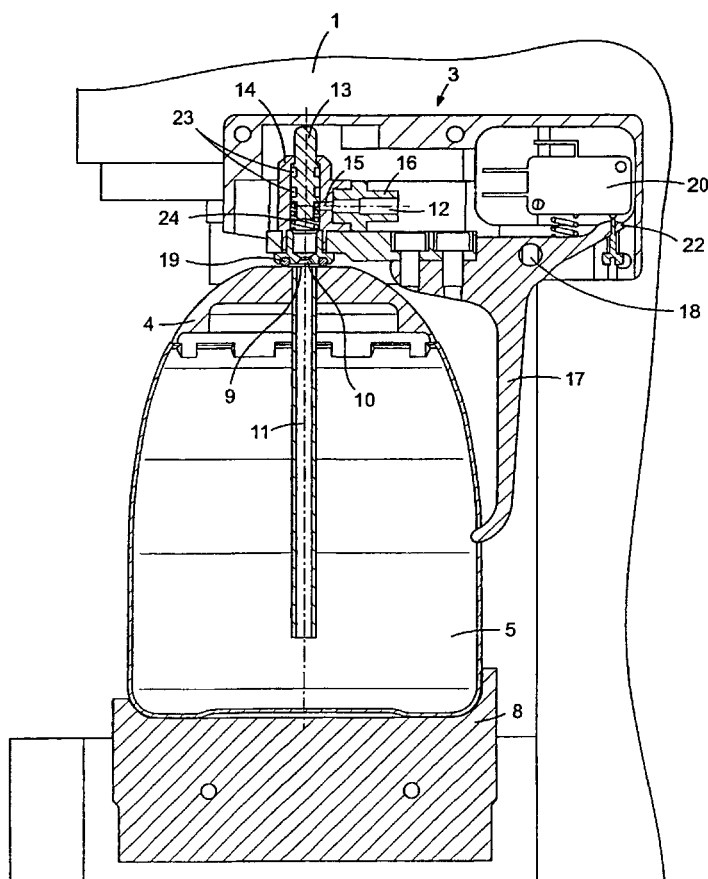

(57) Abstract: Coffee machine of the "espresso" type comprising a water tank, a pump, a heater unit and circuits for feeding hot water and steam to a percolation nozzle (2). The machine further comprises an integrated steam delivery device (3) which comprises a steam inlet (12) connected to the steam feed circuit and a steam outlet (10). The steam delivery circuit possesses a cylindrical body (14) equipped with an aperture connected to the steam inlet (12) and a cylindrical piece (13) which can move within the body (14) to open or close the steam circuit depending on its position in the body (14). A control member actuated by means of a control finger (17) enables the steam outlet (10) to be brought into contact with the aperture (9) in the closure (4) of a receptacle (5).



WO 01/26520 A3



(88) Date of publication of the international search report:
6 December 2001

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.