



(51) International Patent Classification:
E21B 43/12 (2006.01)

(21) International Application Number:
PCT/EP2011/055894

(22) International Filing Date:
14 April 2011 (14.04.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20100573 21 April 2010 (21.04.2010) NO

(71) Applicant (for all designated States except US):
PETROLEUM TECHNOLOGY COMPANY AS [NO/
NO]; Slettestrandveien 13, N-4032 Stavanger (NO).

(72) Inventors; and

(75) Inventors/Applicants (for US only): STOKKA, Øyvind
[NO/NO]; Veslefrikkvegen 11, N-4315 Sandnes (NO).
TVEITEN, Magnar [NO/NO]; Bauneveien 7a, N-4328
Sandnes (NO). PETTERSEN, Ståle [NO/NO]; Skaret 3,
N-4326 Sandnes (NO). KLEPPA, Erling [NO/NO];
Klovsteinveien 17, N-4100 Jørpeland (NO).

(74) Agents: LANGAN, Hans et al.; c/o Onsagers AS,
P.O.Box 6963 St. Olavs Plass, N-0130 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: DEVICE AND METHOD OF ENCHANCING PRODUCTION OF HYDROCARBONS

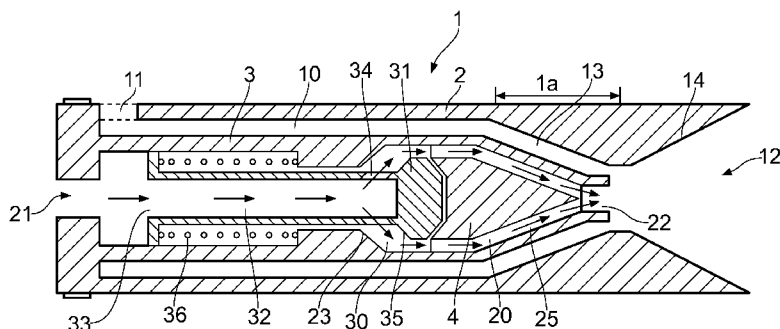


FIG. 1

(57) Abstract: A device and an associated method, of enhancing production of hydrocarbons from a wellbore by the use of a device, where the device is arranged in a side pocket mandrel. The method, and associated device, includes means for allowing a fraction of a main production flow to enter a first flow passage (10) in the device through an inlet (11) and to mix with the fluid from a second flow passage (20) in the device, before returning the mixed flow to the main production flow.