

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 September 2002 (19.09.2002)


PCT

(10) International Publication Number
WO 02/073013 A1

- (51) International Patent Classification⁷: **F02B 47/04** (74) Agent: **KOLSTER OY AB**; Iso Roobertinkatu 23, P.O.Box 148, FIN-00121 Helsinki (FI).
- (21) International Application Number: PCT/FI02/00199
- (22) International Filing Date: 13 March 2002 (13.03.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20010514 14 March 2001 (14.03.2001) FI
- (71) Applicant (for all designated States except US): **MAR-IOFF CORPORATION OY** [FI/FI]; Hakamäenkuja 4, FIN-01510 Vantaa (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SUNDHOLM, Göran** [FI/FI]; Ilmari Kiannon kuja 3, FIN-04310 Tuusula (FI).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR REDUCING COMBUSTION ENGINE EMISSIONS

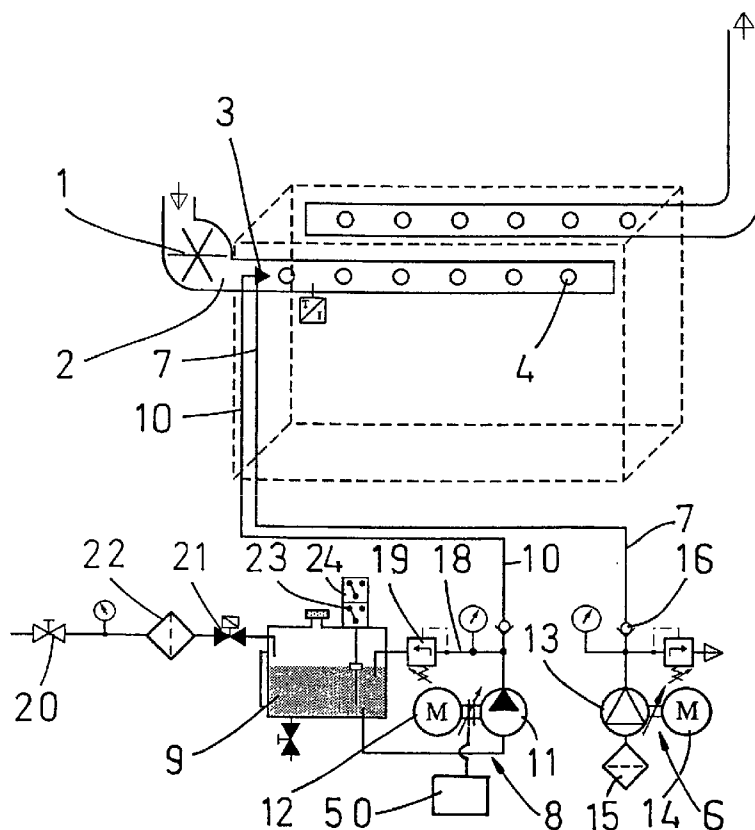

(57) Abstract: The invention relates to a method for cleaning exhaust gases from a combustion engine, in which method humid air is fed into the combustion chamber of the combustion engine. In order to reduce nitrogen emissions effectively, particularly when a diesel engine is running at partial power, and in order for the method to be very accurately adjustable to meet the requirements of each particular engine application and use, in accordance with the invention, a mixture of gas and aqueous mist is fed with a spray head (3) into a space (2), which leads to the combustion chamber. The method can be readily implemented by an apparatus, which can be mounted in a small space without having to make substantial changes in the combustion engine. The invention also relates to an apparatus for cleaning exhaust gases from a combustion engine.

WO 02/073013 A1



(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.