



- (51) **International Patent Classification:**
F16N 21/02 (2006.01) *F16N 21/04* (2006.01)
- (21) **International Application Number:**
PCT/IB2015/057467
- (22) **International Filing Date:**
30 September 2015 (30.09.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
700550 30 September 2014 (30.09.2014) NZ
- (71) **Applicant:** NEVALEAK HOLDINGS LIMITED
[NZ/NZ]; 8 Toi Toi Place, Northcote, Auckland, 0627 (NZ).
- (72) **Inventor:** SLEE, Bradley Alexander; 8 Toi Toi Place, Northcote, Auckland, 0627 (NZ).
- (74) **Agent:** AJ PARK; Level 22, State Insurance Tower, 1 Willis Street, Wellington (NZ).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) **Title:** FLUID SUPPLY APPARATUS

FIGURE 1

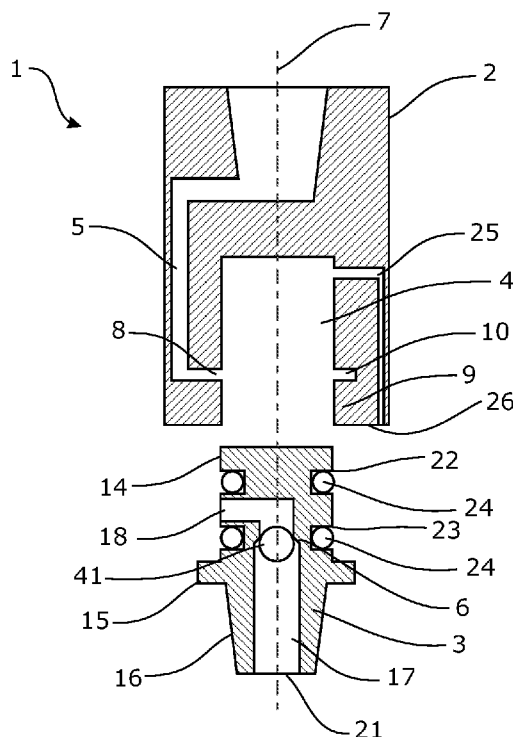

(57) **Abstract:** An apparatus comprising a fluid fitting such as a grease nipple, which is attachable to a device that requires lubrication, and a complementary coupler is provided. The fitting includes an insertable section for mating with a complementary receiving portion on the coupler. The fitting includes one or more first entry ports through a side of the insertable section, and an exit distal to the insertable section. The feed channel exits of the coupler, mate with the entry ports of the fitting when the insertable section of the fitting is in a delivery position, so that a fluid can be transferred under pressure from a fluid reservoir via the coupler, into the fitting.