


Description

This invention relates to a process for the production of a dialkyl maleate. In particular it relates to a process for the production of a substantially acid free dialkyl maleate, for example diethyl maleate, from a reaction product containing a major amount of dialkyl maleate and a minor amount of monoalkyl maleate.

The production of dialkyl maleates by esterification of maleic anhydride, of maleic acid or of a mixture containing both maleic anhydride and maleic acid has been described on many occasions in the literature. As maleic acid is dibasic, esterification proceeds stepwise via the monoalkyl maleate. In the case of maleic anhydride this stepwise esterification can be described by the equations:

10

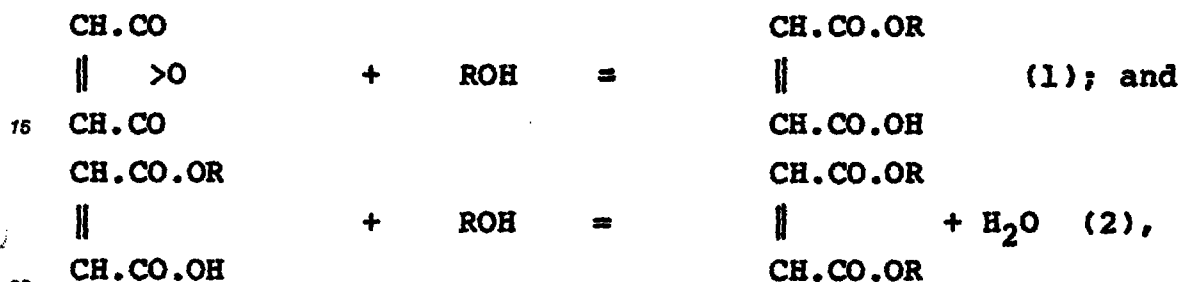

20

where R is an alkyl group. These reactions can be carried out in two substantially separate steps in separate reactors or simultaneously in a single reactor. The monoesterification step of equation (1) can be effected non-catalytically, conveniently by use of elevated temperatures. The diesterification step of equation (2) can likewise be carried out non-catalytically; however, it is usually preferred to use an esterification catalyst in the diesterification step of equation (2), such as an acid catalyst (e.g. sulphuric acid).

The diesterification step of equation (2) above is a reversible reaction and yields an equilibrium mixture which contains a minor amount of monoalkyl maleate. Many batch methods utilise an added esterification catalyst, such as sulphuric acid. In order to recover the dialkyl maleate product the catalyst must first be removed, prior to attempting purification by distillation techniques, by neutralisation with alkali and then washing with water. These neutralisation steps produce significant quantities of aqueous liquors and remove not only the catalyst but also any monoalkyl maleate and any other acid materials present, such as traces of unreacted maleic anhydride or maleic acid. Although it would be theoretically possible to recover such monoalkyl maleate from the resulting aqueous liquors and to recycle this to the process for the production of further dialkyl maleate, this is not economically feasible. Hence the monoalkyl maleate is lost to the process in these aqueous liquors which are a potential pollution hazard. Moreover the loss of monoalkyl maleate and disposal of these waste liquors represent a significant operating cost.

Various proposals which avoid the use of catalysts have been described. Thus US-A-4361710 proposes washing a gaseous mixture containing maleic anhydride with a monohydric or polyhydric alcohol boiling above 180°C (e.g. 2-ethylhexanol or dodecan-1-ol) to form a solution of the corresponding maleic acid half-ester in the alcohol followed by heating the solution to remove water and to form a solution of maleic acid diester in the alcohol. As water boils at a temperature well below that of the alcohol it is readily removed from the reaction mixture, thus enabling the diesterification reaction to be driven to completion.

US-A-4032458 describes a process for the production of 1,4-butane diol in which maleic acid is esterified at elevated temperature and pressure and then subjected to a two step hydrogenation procedure. According to the description of the drawing it is preferred to use for esterification a monohydric alcohol which forms a heterogeneous azeotrope with water, such as *n*-butanol. The esterification step is carried out in a distillation zone from which an *n*-butanol-water azeotrope is removed overhead. According to column 11, lines 23 to 27, this azeotrope is condensed and allowed to separate into two layers. The *n*-butanol layer is decanted, redistilled, and recycled to the distillation zone. The *n*-butanol-water azeotrope has a boiling point (92.7°C at atmospheric pressure) which is appreciably lower than the boiling point of the alcohol itself (117.4°C at atmospheric pressure), thus permitting the water to be removed readily from the esterification mixture. In addition the process can only operate as described because the condensed azeotrope is heterogeneous and separates into two layers, thus permitting ready recovery of *n*-butanol for recycle to the process.

Although it is stated at column 8, lines 45 to 47 of US-A-4032458 that:

"Other suitable monohydric alcohols useful in the process of their invention include ethanol, propanol,

butanol, amylalcohol and the like",

the illustrated form of plant will not operate with ethanol in place of n-butanol because ethanol is fully miscible with water and forms therewith a homogeneous azeotrope comprising a single liquid phase. It requires much energy to produce substantially dry ethanol from this azeotrope for recycle to the process. Moreover, because the boiling point of the ethanol-water azeotrope is extremely close (78.17°C at atmospheric pressure) to that of ethanol itself (78.32°C at atmospheric pressure) all the ethanol must be distilled out of the esterification mixture in order to remove all the water. n-propanol gives rise to similar problems. Because of these factors it is extremely costly in energy requirements, when using ethanol or propanol in the distillation-esterification step of the process of US-A-4032458, to remove the water of esterification completely and hence drive the esterification reaction towards production of a 100% yield of dialkyl maleate.

US-A-4562283 discloses a method of separating maleic anhydride from gaseous reaction mixtures by contact in the bottom of a column with butanol and then washing the treated gases in the column with a countercurrent stream of butyl maleate. According to column 2, lines 33 to 36 of US-A-4562283, any water formed is removed from the column above the feed point for the butanol. Again, this procedure can be used for removal of the water of esterification only because the butanol-water azeotrope boils appreciably below butanol itself and because the azeotrope separates into two liquid phases upon condensation.

As an alternative to using non-catalytic esterification methods to produce dialkyl maleates or to using homogeneous esterification catalysts such as sulphuric acid, it is also possible to use a heterogeneous esterification catalyst, such as an acidic ion exchange resin containing sulphonc acid groups, for production of a dialkyl maleate. Although such heterogeneous catalysts obviate use of a neutralisation step for catalyst removal and hence obviate consequent loss of monoalkyl maleate, yet the problem of incomplete esterification remains, particularly when ethanol is used for esterification. Although a certain degree of purification of the reaction product can be achieved by distillation, yet it is impossible to obtain pure diethyl maleate in this way as any monoethyl maleate present tends to undergo thermal decomposition in the distillation column to yield maleic anhydride and ethanol. The resulting maleic anhydride contaminates the diethyl maleate fraction. It is possible to reduce this problem by utilising a multi-step esterification procedure for the diesterification reaction in which at least the final stage diesterification involves reaction of the final traces of monoethyl maleate with a large excess of dry ethanol. However the cost of producing dry ethanol represents a significant processing cost.

It would accordingly be desirable to provide a process for the production of a dialkyl maleate from reaction mixtures containing a major amount of dialkyl maleate and a minor amount of monoalkyl maleate in which the difficulties associated with thermal decomposition of monoalkyl maleates are obviated. It would be particularly desirable to provide such a process which can be used for diethyl maleate and for dialkyl maleates derived from other alkanols which form homogeneous azeotropes with water, such as n-propanol.

The present invention accordingly seeks to provide a process for the production of a substantially acid free dialkyl maleate, e.g. diethyl maleate, from a reaction mixture containing a major amount of dialkyl maleate and a minor amount of the corresponding monoalkyl maleate, which process minimises reaction losses arising through use of a neutralisation step and yet substantially overcomes the problems associated with thermal decomposition of the monoalkyl maleate during distillation.

According to the present invention there is provided a continuous process for the production of a substantially acid free dialkyl maleate from a feed stream containing a major amount of dialkyl maleate and a minor amount of monoalkyl maleate which comprises:

(a) continuously supplying the feed stream to a primary distillation zone;

(b) continuously distilling the feed stream in the primary distillation zone under temperature and pressure conditions conducive to thermal decomposition of monoalkyl maleate to yield maleic anhydride and alkanol;

(c) recovering from the primary distillation zone (i) a bottom fraction containing monoalkyl maleate and dialkyl maleate in admixture, (ii) a vaporous fraction comprising alkanol, and (iii) an intermediate fraction which is substantially free from alkanol and which comprises a major proportion of dialkyl maleate and a minor proportion of maleic anhydride;

(d) continuously redistilling the intermediate fraction (iii) from step (c) in a secondary distillation zone to yield (i) an overhead fraction containing maleic anhydride and (ii) a bottom fraction containing substantially acid free dialkyl maleate; and

(e) recovering the bottom fraction (ii) of step (d).

The term "bottom fraction" as used herein means in each case a fraction recovered from a lower part of the respective distillation zone, either in the form of a vaporous stream, which is usually subsequently condensed to form a liquid, or in the form of a liquid stream.

The dialkyl maleate is preferably derived from an alkanol, preferably a primary or secondary alkanol, which contains up to 4 carbon atoms. The process of the invention is of particular applicability to dialkyl maleates derived from C₂ to C₄ alkanols, such as ethanol, *n*-propanol, *iso*-propanol, *n*-butanol, *iso*-butanol and *sec*-butanol. The process of the invention is accordingly applicable to purification of mixtures containing a major amount of diethyl maleate, di-*n*-propyl maleate, di-*iso*-propyl maleate, di-*n*-butyl maleate, di-*iso*-butyl maleate, or di-*sec*-butyl maleate, and a minor amount of the corresponding monoalkyl maleate. The process is used to especial advantage in the production of substantially acid free diethyl maleate from crude mixtures containing a major amount of diethyl maleate and a minor amount of monoethyl maleate.

The feed stream is preferably obtained by esterification of maleic anhydride, of maleic acid, or of a mixture of maleic anhydride and maleic acid with an alkanol, such as ethanol, in one or more stages in the presence of a solid heterogeneous esterification catalyst, such as an ion exchange resin containing acid groups selected from sulphonic acid and carboxylic acid groups. The crude reaction mixture obtained by such a procedure can be used as such in the process of the invention. Preferably, however, the crude reaction mixture is distilled to remove at least a major part of any alkanol and water present therein. In some cases the maleic acid or anhydride feedstock may optionally contain a minor amount (e.g. from about 0.001 mole % up to about 5 mole %) of fumaric acid if the presence of a minor amount of dialkyl fumarate can be tolerated in the resulting substantially acid free dialkyl maleate product; for example, the presence of minor amounts of diethyl fumarate in a diethyl maleate feedstock can be tolerated in the hydrogenation processes described in EP-A-01 43 634, WO-A-86/03189, and WO-A-86/07358. For the avoidance of doubt references hereafter to maleic acid, to monoalkyl maleates and to dialkyl maleates are intended to refer, where the context so permits, not only to the named compounds but also to mixtures of the named compounds and minor amounts of the corresponding fumaric acid, monoalkyl fumarate and/or dialkyl fumarate.

The composition of the feed stream will depend upon the reaction conditions used in its preparation. When esterifying maleic anhydride with ethanol with a view to producing diethyl maleate, for example, it is in practice economically unattractive to attempt to esterify all monoethyl maleate present in the crude esterification mixture. Hence the feed stream generally includes at least about 2 mole % up to about 40 mole % of monoalkyl maleate. Preferably the starting material does not contain more than about 30 mole % of monoalkyl maleate. There can thus be contemplated for use in the process of the invention feed streams containing from about 98:2 to about 60:40 dialkyl maleate:monoalkyl maleate on a molar basis, preferably from about 98:2 to about 70:30 on this basis. Besides dialkyl maleate and monoalkyl maleate the feed stream may also include minor amounts of water and alkanol.

If desired, the bottom fraction (ii) of step (d) can be subjected, after recovery thereof in step (e), to a final neutralisation step to remove any remaining trace of acidic materials, such as maleic anhydride, maleic acid, fumaric acid, monoalkyl maleate, and/or monoalkyl fumarate. Generally speaking the bottom fraction (ii) of step (d) contains no more than about 0.2 to 0.3 mole % in total of acidic materials. Such a neutralisation step conveniently comprises passage of the bottom fraction (ii) of step (d) of the process, possibly after addition of a minor amount of water thereto, through a bed of a basic anion exchange resin, for example a weakly basic anion exchange resin containing substituted amino groups (e.g. -N(CH₃)₂ groups), or through a bed of a solid alkali, such as sodium hydroxide or sodium bicarbonate, followed by redistillation. Alternatively it can comprise washing with an aqueous alkaline wash liquor, such as a solution of a mixture of sodium carbonate and disodium maleate (optionally followed by a water wash), and subsequent redistillation to separate water as an overhead product, pure dialkyl maleate as an intermediate product and a sodium containing bottom product. As traces only of acid materials remain in the bottom fraction (ii) of step (d), relatively small amounts only of waste wash liquors are produced in the process of the invention whose disposal does not represent a major problem. Moreover losses of potential dialkyl maleate in the form of monoalkyl maleate, maleic acid or maleic anhydride lost in the waste liquors, are minimal.

In an alternative preferred process according to the invention the acid content of the fraction (ii) of step (d) is reduced still further by repeating the process of the invention utilising said fraction (ii) of step (d), after recovery thereof in step (e), as the feed stream to a further primary distillation zone and thereafter repeating steps (b) to (e).

It will usually be convenient to operate the primary distillation zone of step (a) under reduced pressure, for example at a pressure of from about 0.03 bar to about 0.33 bar. However, pressures of more than 0.33 bar are not excluded, although it will not normally be desired to use a pressure of more than about 1 bar in the primary distillation zone.

The vaporous fraction (ii) of step (c) generally contains, in addition to a mixture of alkanol and a minor amount of maleic anhydride, possibly also any water present in the feed stream, and also a minor amount

of dialkyl maleate.

The design of the primary distillation zone will be dependent to some extent on the composition of the reaction product to be treated. For feed streams containing from about 2 mole % up to about 40 mole % monoalkyl maleate, the primary distillation zone may comprise a single distillation column. For reaction products containing from about 15 mole % up to about 40 mole % monoalkyl maleate it may be preferred to use two distillation columns in series since this can result in a reduction in operating costs; in this case the material supplied to the second distillation column of the primary distillation zone from the first distillation column thereof comprises a substantially alkanol free fraction that is richer in dialkyl maleate than the feed stream, and the intermediate fraction (iii) of step (c) is recovered from the second distillation column.

When the primary distillation zone comprises a single distillation column, the intermediate fraction (iii) of step (c) may comprise a vaporous stream taken from a part of the column intermediate the top and bottom thereof. It is also envisaged that the primary distillation zone may comprise a single distillation column provided with a reflux condenser in the path of a vaporous overhead stream therefrom, which reflux condenser is operated under partial condensation conditions so as to produce a substantially alkanol free condensate that contains dialkyl maleate and maleic anhydride; a part of this condensate can be returned as a reflux stream to the column, while the vaporous fraction (ii) of step (c) is recovered from the reflux condenser, and the intermediate fraction (iii) of step (c) comprises another part of the condensate.

When the primary distillation zone comprises first and second distillation columns connected in series, a vaporous stream can be taken from a part of the first distillation column intermediate the top and bottom thereof for supply to the second distillation column, and the intermediate fraction (iii) of step (c) can be recovered from the second distillation column.

Alternatively the primary distillation zone may comprise first and second distillation columns connected in series, in which case the first distillation column may be provided with a reflux condenser in the path of an overhead vaporous fraction therefrom, which reflux condenser is operated under partial condensation conditions so as to produce a substantially alkanol free condensate that comprises dialkyl maleate and maleic anhydride; a part of this condensate from the reflux condenser of the first distillation column can then be returned as a reflux stream to the first distillation column, while a vaporous stream containing alkanol is recovered from the reflux condenser of the first distillation column, and another part of the condensate from the reflux condenser of the first distillation column is supplied to the second distillation column.

When the process involves use of a primary distillation zone comprising first and second distillation columns connected in series, the intermediate fraction (iii) of step (c) may comprise material recovered in vapour form from a part of the second distillation column intermediate the top and bottom thereof. Alternatively the second distillation column may be provided with a reflux condenser in the path of an overhead vaporous stream therefrom, in which case the reflux condenser of the second distillation column can be operated under partial condensation conditions so as to produce a substantially alkanol free condensate that comprises dialkyl maleate and maleic anhydride, a part of the condensate from the reflux condenser of the second distillation column being returned as a reflux stream to the second distillation column, while a vaporous stream containing alkanol is recovered from the reflux condenser of the second distillation column, and the intermediate fraction (iii) of step (c) comprises another part of the condensate from the reflux condenser of the second distillation column.

Preferably the vaporous fraction (ii) of step (c) is subjected to condensation conditions to condense condensable materials, including alkanol, therefrom.

The partial condensation conditions used in certain of these preferred processes result in production of a condensate containing dialkyl maleate, e.g. diethyl maleate, and maleic anhydride and a vaporous stream containing alkanol. Such partial condensation conditions include use of a condensation temperature which is higher than the boiling point of the alkanol or of any alkanol-water azeotrope yet lower than the boiling point of maleic anhydride at the pressure prevailing in the primary distillation zone and which is also higher than the melting point of maleic anhydride (80°C). Hence the partial condensation conditions include use of a temperature of at least about 60°C whatever the pressure prevailing in the primary distillation zone. When atmospheric pressure prevails in the primary distillation zone the partial condensation conditions include use of a temperature in the range of from about 80°C to about 180°C. At lower pressures a lower temperature range may be used. For example at about 0.03 bar the temperature range may be from about 60°C to about 140°C, while at 0.33 bar it may be from about 60°C to about 160°C.

The secondary distillation zone of step (d) may comprise a single distillation column which will usually be operated under reduced pressure, for example at a pressure of from about 0.03 bar to about 0.33 bar. However it may alternatively comprise two or more distillation columns in series. The bottom fraction of step


(d) is recovered from a lower part of the distillation column of the secondary distillation zone, if this consists of a single distillation column, or from a lower part of the last of the distillation columns in the series, if the secondary distillation zone consists of two or more distillation columns in series, either in the form of a vaporous stream or in the form of a liquid stream; in the former case the vaporous stream is generally condensed to form a liquid stream in the recovery step (e) of the process.

In order that the invention may be clearly understood and readily carried into effect five preferred forms of plant for the purification of impure diethyl maleate feedstreams which operate according to the process of the invention will now be described, by way of example only, with reference to the accompanying drawings, Figures 1 to 5 of which are each a flow diagram of the respective plant.

It will be understood by those skilled in the art that the drawings are diagrammatic and that further items of equipment such as reflux drums, pumps, vacuum pumps, temperature sensors, pressure sensors, pressure relief valves, control valves, flow controllers, level controllers, holding tanks, storage tanks, and the like would additionally be required in a commercial plant. The provision of such ancillary items of equipment forms no part of the present invention and is in accordance with conventional chemical engineering practice.

Referring to Figure 1 of the drawings, an impure diethyl maleate feedstream containing diethyl maleate, monoethyl maleate, ethanol, and water, is fed in line 1 to an intermediate point of a primary distillation column 2 operated at a pressure of 0.066 bar. This impure diethyl maleate stream is produced by esterification of maleic anhydride with ethanol in two stages in an esterification plant using non-catalytic conditions in the first, monoesterification stage and an acidic ion exchange resin, such as Amberlyst 16, in the second, diesterification stage. (The word "Amberlyst" is a trade mark). This diesterification stage includes use of a plurality of reactors, the final one of which is supplied with "dry" ethanol from a suitable ethanol dehydration unit. The resulting reaction mixture does not require any neutralisation step to remove catalyst therefrom (because a heterogeneous catalyst has been used) but is subjected to a preliminary distillation step upstream from the plant of Figure 1 in order to remove substantially all water and ethanol present in the crude reaction product and provide the feed stream of line 1.

An overhead stream containing ethanol and minor amounts of water, maleic anhydride, monoethyl maleate, and diethyl maleate, is recovered overhead in line 3 at a temperature of 140°C. The presence of maleic anhydride in the overhead product in line 3 results, it is thought, from the reversible decomposition of monoethyl maleate in primary distillation column 2 according to the equation:

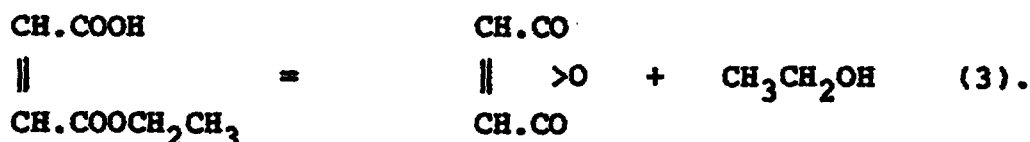

The vapours in line 3 are led through a first condenser 4 which is supplied in line 5 with water under pressure at a temperature of 130°C. A major part of the condensable components of the vapours in line 3 with boiling points above that of ethanol are thereby condensed in first condenser 4. The resulting condensate is returned to primary distillation column 2 in line 6 to form a reflux stream therefor. This condensate consists of a mixture of maleic anhydride, diethyl maleate and monoethyl maleate. A minor part of these higher boiling components in the vapours in line 3 and a major part of the ethanol and water contained therein pass on, still in the vapour form, in line 7 to a second condenser 8 which is supplied in line 9 with chilled cooling medium (e.g. chilled water) so as to cool the vapours to a temperature below 20°C. In this way the residual condensable components present in the vapour stream in line 7 are in large part condensed and losses in the vapour purge are minimised. The resulting condensate contains mainly ethanol and water besides traces of monoethyl maleate, diethyl maleate and maleic anhydride and is recovered in line 10 for recycle to the esterification plant. Line 11 indicates a connection to a vacuum pump or steam ejector (not shown).

A liquid bottom product containing a mixture of diethyl maleate and monoethyl maleate is recovered from primary distillation column 2 in line 12. Part of this liquid bottom product is recycled in line 13 to column reboiler 14 which is supplied with steam in line 15, while the remainder is recycled to the esterification plant in line 16.

An intermediate fraction is recovered from primary distillation column 2 in line 17. This intermediate fraction consists of a major amount of diethyl maleate and a minor amount of maleic anhydride. It is fed to an intermediate point of a secondary distillation column 18. The maleic anhydride present in the stream in line 17 appears overhead in line 19 and is passed to condenser 20 which is fed in line 21 with water at

60°C. The resulting condensate is returned as a reflux stream to column 18 in line 22. Uncondensed maleic anhydride vapour passes on in line 23 and is combined with the stream in line 7 before being recycled to the esterification plant in line 10. The liquid bottom product from secondary distillation column 18 is recovered in line 24 and contains substantially pure diethyl maleate and, at most, only traces (typically about 0.3 mole % or less in total) of acidic materials, such as monoethyl maleate, maleic anhydride and/or maleic acid. Part of this liquid bottom product is recycled in line 25 to column reboiler 26 which is fed with steam in line 27. The remainder is passed in line 28 to neutralisation section 29 where final traces of acid are removed.

A substantially acid free diethyl maleate product stream is recovered in line 30. The compositions and flow rates in the various lines of the plant of Figure 1 are set out in Table 1.

15

20

25

30

35

40

45

50

55

TABLE 1

LINE NO.	1	7	23	10	16	17	28	30
Flow rates in moles per hour								
Diethyl maleate	60.3	2.0	0.8	2.8	8.3	50.0	49.2	49.2
Monoethyl maleate	1.5	Trace	Nil	Trace	1.1	0.1	Trace	Nil
Ethanol	3.7	4.0	0.1	4.1	Nil	Nil	Nil	Nil
Water	2.0	2.0	Nil	2.0	Nil	Nil	Nil	Nil
Maleic anhydride	0	Trace	0.4	0.4	Nil	0.3	Trace	Nil

The overall recovery of diethyl maleate from the feed stream in line 1 is 81.6%. Although there are small losses of acid materials from the plant in the waste liquors from the neutralisation section 29 and possibly also small losses in line 11, the remaining organic material is recovered in lines 10 and 16 and can be recycled to the esterification plant for production of further diethyl maleate.

The results for an alternative feed stream are set out in Table 2 which lists the flow rates and

compositions in the most important lines of the plant of Figure 1.

TABLE 2

LINE NO.	1	7	23	10	16	17	28	30
Flow rates in moles per hour								
Diethyl maleate	52.0	3.0	3.0	6.0	7.8	41.2	38.2	38.2
Monoethyl maleate	14.2	Trace	Nil	Trace	8.3	1.4	*	Nil
Ethanol	5.8	10.3	0.4	10.7	Nil	Nil	Nil	Nil
Water	0.4	0.4	Nil	0.4	Nil	Nil	Nil	Nil
Maleic anhydride	Nil	Trace	5.5	5.5	Nil	4.5	*	Nil

The acid content in line 28, as indicated by the asterisk (*) in Table 2, totals 0.4 moles per hour. With this feedstock the overall recovery of diethyl maleate is 73.5%. However, apart from any losses of material via line 11 and the small losses from the system of acids materials in the aqueous waste liquors from the

neutralisation section, the remaining organic material in the feed stream in line 1 is recovered in lines 10 and 16 and can be recycled for re-use in the esterification plant.

The plant of Figure 2 is generally similar to that of Figure 1, except that, instead of taking a vaporous side stream in line 17 to supply the secondary distillation column 18, this is fed by way of line 31 with condensate from line 6.

The plant of Figure 3 is supplied in line 101 with a feed stream containing diethyl maleate, monoethyl maleate, ethanol, and water. This feed stream is obtained by a two step esterification of maleic anhydride with ethanol, using a non-catalytic primary esterification reaction to yield monoethyl maleate followed by addition of ethanol and passage through a single stage diesterification reactor containing a charge of Amberlyst 16 or similar solid esterification catalyst, and then by a preliminary distillation step to remove at least the bulk of the water and ethanol present in the crude reaction product. The feed stream in line 101 is subjected to distillation in a primary distillation zone which includes a first distillation column 102 and a second distillation column 103.

The overhead product from column 102 in line 104 contains ethanol, water, and minor amounts of monoethyl maleate, diethyl maleate and maleic anhydride. This is passed to a condenser 105 which is supplied in line 106 with water at a temperature of 130 °C. The operating pressure of column 102 is 0.066 bar.

The ethanol and water, together with traces of monoethyl maleate and diethyl maleate, pass on in line 107 to a condenser 108 which is supplied with chilled cooling medium (e.g. chilled water) at less than 20 °C in line 109. The resulting condensate is recycled to the esterification plant in line 110. Line 111 is a connection to a vacuum pump or a steam ejector (not shown), by means of which the operating pressure in the distillation columns is maintained.

Condensate from condenser 105 is returned as a reflux stream to the top of the first distillation column 102 in line 112.

The liquid bottom product from first distillation column 102 in line 113 contains diethyl maleate and monoethyl maleate. Part of this liquid bottom product is recycled in line 114 to column reboiler 115, which is heated with steam supplied in line 116, and then returned to column 102, while the remainder is recovered in line 117.

An intermediate fraction is recovered in line 118 from first distillation column 102, this intermediate fraction containing a major amount of diethyl maleate and minor amounts of monoethyl maleate and maleic anhydride. It is redistilled in second distillation column 103. The overhead product in line 119 contains ethanol, together with minor amounts of maleic anhydride, monoethyl maleate and diethyl maleate, and is passed to a condenser 120 which is supplied with water under pressure at 130 °C in line 121. Second distillation column 103 is operated at a pressure of 0.066 bar. Uncondensed ethanol vapour, together with traces of monoethyl maleate and diethyl maleate, passes on in line 122 and is combined with the vapours in line 107 for passage through condenser 108. The condensate from condenser 120 is returned to the top of second distillation column 103 as a reflux stream in line 123.

The liquid bottom product from second distillation column 103 is recovered in line 124 and contains diethyl maleate and monoethyl maleate. Part of this liquid bottom product is recycled to column 103 by way of line 125 and column reboiler 126, which is fed with steam in line 127; the remainder is recovered in line 128. The streams in lines 117 and 128 are combined in line 129 and recycled to the esterification plant.

An intermediate fraction is recovered from second distillation column 103 in line 130. This is essentially free from monoethyl maleate and consists of a mixture of a major amount of diethyl maleate and a minor amount of maleic anhydride. This intermediate fraction is fed to a secondary distillation zone in the form of third distillation column 131. Maleic anhydride appears in the overhead product in line 132 which is passed to condenser 133 supplied in line 134 with water at 60 °C. Condensate is returned to column 103 as a reflux stream in line 135. Uncondensed vapours pass on in line 136 and are admixed with the vapours in line 107 for passage to the condenser 108. The liquid bottom product in line 137 is a substantially acid free diethyl maleate stream. Part of this bottom product in line 137 is recycled to column 131 in line 138 through reboiler 139, which is fed with steam in line 140. The remainder passes on in line 141 to neutralisation section 142 in which remaining traces of acid are removed. A pure acid free diethyl maleate stream is recovered in line 143.

The compositions and flow rates of the various streams in the most important lines of the plant of Figure 3 are set out in Table 3.

TABLE 3

LINE NO.	101	107	118	122	136	110	117	128	129	130	141	143
Flow rates in moles per hour												
Diethyl maleate	49.5	3.0	41.5	0.1	3.0	6.1	5.0	5.9	10.9	35.5	32.5	32.5
Monomethyl maleate	16.8	Trace	1.2	Trace	Nil	Trace	14.5	0.7	15.2	0.4	Trace	Nil
Ethanol	3.8	4.9	Nil	0.1	0.4	5.4	Nil	Nil	Nil	Nil	Nil	Nil
Water	0.2	0.2	Nil	Nil	Nil	0.2	Nil	Nil	Nil	Nil	Nil	Nil
Maleic anhydride	Nil	Trace	1.1	Trace	1.6	1.6	Nil	Nil	Nil	1.2	Trace	Nil

The plant of Figure 4 is generally similar to that of Figure 3 except that, instead of taking vaporous side streams in line 118 and 130 from the first and second distillation columns 102 and 103 of the primary distillation zone to supply the second distillation column 103 and the third distillation column 131 respectively, these columns are supplied by way of lines 144 and 145 respectively with condensate from lines 112 and 123 respectively.

The plant of Figure 5 is a modified form of the plant of Figure 2 and like reference numerals have been used to indicate like parts in Figures 2 and 5. Instead of passing the material in line 28 to a neutralisation section 29, this is fed to a further primary distillation column 201 which is operated under reduced pressure. The overhead stream in line 202 contains traces of ethanol and maleic anhydride but consists predominantly of diethyl maleate. Condenser 203 is supplied with cooling water in line 204 so as to condense a major part of the condensible components in line 202 which have boiling points above that of ethanol. The condensate therefrom is returned to column 201 by way of lines 205 and 206 to form a reflux stream therefor. The ethanol passes on in line 207 to a second condenser 208 which is supplied in line 209 with chilled cooling medium (e.g. chilled water) so as to cool the vapours to a temperature below 20°C. In this way the residual condensible components present in the vapour stream in line 207 are in large part condensed and losses in the vapour purge are minimised. The resulting condensate contains mainly ethanol besides traces of monoethyl maleate, diethyl maleate and maleic anhydride and is recovered in line 210 for recycle to column 18. Line 211 indicates a connection to a vacuum pump or steam ejector (not shown).

A liquid bottom product consisting essentially of diethyl maleate and a trace of monoethyl maleate and other acidic materials is recovered from column 201 in line 212. Part of this liquid bottom product is recycled in line 213 to column reboiler 214 which is supplied with steam in line 215, while the remainder is recycled to the esterification plant in line 216.

Part of the condensate in line 205 is fed by way of line 217 to an intermediate point of a further distillation column 218. The majority of any remaining maleic anhydride present in the stream in line 217 appears overhead in line 219 and is passed to condenser 220 which is fed in line 221 with water at 60°C. The resulting condensate, which is predominantly diethyl maleate but contains a trace of maleic anhydride, is returned as a reflux stream to column 218 in line 222. Any uncondensed maleic anhydride vapour passes on in line 223 and is combined with the stream in line 207 before being recycled to column 18 in line 210. A liquid stream is taken from column 218 in line 224. Part of this liquid stream is recycled in line 225 to column reboiler 226 which is fed with steam in line 227. A minor purge stream is recycled in line 228 to column 201.

A vaporous diethyl maleate bottom product stream is recovered from column 218 in line 229 and condensed in condenser 230 whose cooling water supply line is indicated at 231. The compositions and flow rates in the various lines of the plant of Figure 5 are set out in Table 4, together with some relevant operating conditions. In the case of lines 1, 28, 31, 217 and 228 the conditions mentioned are those at the delivery end of the respective line.

TABLE 4

LINE NO.	1	7	31	23	28	207	217	223	228	229
Flow rates in kg moles per hour										
Diethyl maleate	108.4	3.8	90.3	0.1	98.9	7.1	89.6	4.5	8.5	76.6
Monoethyl maleate	21.0	Nil	0.1	Nil	0.1	Trace	Trace	Nil	Trace	Nil
Ethanol	7.6	14.0	2.0	1.7	Nil	Trace	Nil	Trace	Nil	Nil
Water	1.9	1.7	0.2	0.2	Nil	Nil	Nil	Nil	Nil	Nil
Maleic anhydride	Nil	0.9	7.5	0.5	Trace	Trace	Trace	Trace	Nil	Nil
"Heavies"	1.9	Nil	Trace	Nil	Trace	Nil	Nil	Nil	Nil	Nil
Temperature (°C)	82	109	109	91	162	148	92	146	162	148
Pressure (bar)	0.14	0.10	0.12	0.10	0.14	0.11	0.14	0.11	0.14	0.11

The plants of Figures 1 to 5 have been described in relation to feed streams containing diethyl maleate and monoethyl maleate and the recovery therefrom of substantially pure diethyl maleate. For some purposes, however, the presence of a minor amount of diethyl fumarate can be tolerated in the product diethyl maleate; for example, the presence of from about 0.001 mole % up to about 5 mole % diethyl fumarate in the product stream can be tolerated in the process of EP-A-01 43 634, WO-A-86/03189, or WO-

A-86/07358. In such cases the feed stream can contain corresponding amounts of diethyl fumarate, besides minor amounts of fumaric acid and/or of monoethyl fumarate, resulting, for example, from the presence of a minor amount of fumaric acid in the maleic anhydride used as feedstock for the production of the diethyl maleate-containing feed stream. Under such circumstances monoethyl fumarate will be present, in addition to monoethyl maleate, in the stream in line 16 or in line 129, while diethyl fumarate will be present in the final product stream in line 30, in line 143, or in line 229 in addition to diethyl maleate. If essentially pure diethyl maleate is required from a product stream in line 30, in line 143, or in line 229, that contains also diethyl fumarate, then this can be obtained from the respective product stream by further distillation.

Figures 1 to 5 illustrate the use of distillation columns with trays; it will be appreciated by those skilled in the art that any other suitable form of distillation column can be used, such as packed towers, in place of the illustrated type of column.

Claims

1. A continuous process for the production of a substantially acid free dialkyl maleate from a feed stream containing a major amount of dialkyl maleate and a minor amount of monoalkyl maleate which comprises:
 - (a) continuously supplying the feed stream to a primary distillation zone;
 - (b) continuously distilling the feed stream in the primary distillation zone under temperature and pressure conditions conducive to thermal decomposition of monoalkyl maleate to yield maleic anhydride and alkanol;
 - (c) recovering from the primary distillation zone (i) a bottom fraction containing monoalkyl maleate and dialkyl maleate in admixture, (ii) a vaporous fraction comprising alkanol, and (iii) an intermediate fraction which is substantially free from alkanol and which comprises a major proportion of dialkyl maleate and a minor proportion of maleic anhydride;
 - (d) continuously redistilling the intermediate fraction (iii) from step (c) in a secondary distillation zone to yield (i) an overhead fraction containing maleic anhydride and (ii) a bottom fraction containing substantially acid free dialkyl maleate; and
 - (e) recovering the bottom fraction (ii) of step (d).
2. A process according to claim 1, in which the bottom fraction (ii) of step (d) is subjected, after recovery thereof in step (e), to a final neutralisation step.
3. A process according to claim 1 or claim 2, in which the primary distillation zone is operated under reduced pressure.
4. A process according to claim 3, in which the primary distillation zone is operated at a pressure in the range of from about 0.03 bar to about 0.33 bar.
5. A process according to any one of claims 1 to 4, in which the primary distillation zone comprises a single distillation column and in which the feed stream supplied thereto contains from about 2 mole % to about 40 mole % of monoalkyl maleate.
6. A process according to any one of claims 1 to 5, in which the primary distillation zone comprises a single distillation column and in which the intermediate fraction (iii) of step (c) comprises a vaporous stream taken from a part of the column intermediate the top and bottom thereof.
7. A process according to any one of claims 1 to 5, in which the primary distillation zone comprises a single distillation column provided with a reflux condenser in the path of a vaporous overhead stream therefrom, in which the reflux condenser is operated under partial condensation conditions so as to produce a substantially alkanol free condensate that contains dialkyl maleate and maleic anhydride, in which a part of the condensate is returned as a reflux stream to the column, in which the vaporous fraction (ii) of step (c) is recovered from the reflux condenser, and in which the intermediate fraction (iii) of step (c) comprises another part of the condensate.
8. A process according to any one of claims 1 to 4, in which the primary distillation zone comprises first and second distillation columns connected in series, in which the feed stream supplied to the first distillation column contains from about 15 mole % to about 40 mole % of monoalkyl maleate, in which



A-86/07358. In such cases the feed stream can contain corresponding amounts of diethyl fumarate, besides minor amounts of fumaric acid and/or of monoethyl fumarate, resulting, for example, from the presence of a minor amount of fumaric acid in the maleic anhydride used as feedstock for the production of the diethyl maleate-containing feed stream. Under such circumstances monoethyl fumarate will be present, in addition to monoethyl maleate, in the stream in line 16 or in line 129, while diethyl fumarate will be present in the final-product stream in line 30, in line 143, or in line 229 in addition to diethyl maleate. If essentially pure diethyl maleate is required from a product stream in line 30, in line 143, or in line 229, that contains also diethyl fumarate, then this can be obtained from the respective product stream by further distillation.

Figures 1 to 5 illustrate the use of distillation columns with trays; it will be appreciated by those skilled in the art that any other suitable form of distillation column can be used, such as packed towers, in place of the illustrated type of column.

Claims

1. A continuous process for the production of a substantially acid free dialkyl maleate from a feed stream containing a major amount of dialkyl maleate and a minor amount of monoalkyl maleate which comprises:
 - (a) continuously supplying the feed stream to a primary distillation zone;
 - (b) continuously distilling the feed stream in the primary distillation zone under temperature and pressure conditions conducive to thermal decomposition of monoalkyl maleate to yield maleic anhydride and alkanol;
 - (c) recovering from the primary distillation zone (i) a bottom fraction containing monoalkyl maleate and dialkyl maleate in admixture, (ii) a vaporous fraction comprising alkanol, and (iii) an intermediate fraction which is substantially free from alkanol and which comprises a major proportion of dialkyl maleate and a minor proportion of maleic anhydride;
 - (d) continuously redistilling the intermediate fraction (iii) from step (c) in a secondary distillation zone to yield (i) an overhead fraction containing maleic anhydride and (ii) a bottom fraction containing substantially acid free dialkyl maleate; and
 - (e) recovering the bottom fraction (ii) of step (d).
2. A process according to claim 1, in which the bottom fraction (ii) of step (d) is subjected, after recovery thereof in step (e), to a final neutralisation step.
3. A process according to claim 1 or claim 2, in which the primary distillation zone is operated under reduced pressure.
4. A process according to claim 3, in which the primary distillation zone is operated at a pressure in the range of from about 0.03 bar to about 0.33 bar.
5. A process according to any one of claims 1 to 4, in which the primary distillation zone comprises a single distillation column and in which the feed stream supplied thereto contains from about 2 mole % to about 40 mole % of monoalkyl maleate.
6. A process according to any one of claims 1 to 5, in which the primary distillation zone comprises a single distillation column and in which the intermediate fraction (iii) of step (c) comprises a vaporous stream taken from a part of the column intermediate the top and bottom thereof.
7. A process according to any one of claims 1 to 5, in which the primary distillation zone comprises a single distillation column provided with a reflux condenser in the path of a vaporous overhead stream therefrom, in which the reflux condenser is operated under partial condensation conditions so as to produce a substantially alkanol free condensate that contains dialkyl maleate and maleic anhydride, in which a part of the condensate is returned as a reflux stream to the column, in which the vaporous fraction (ii) of step (c) is recovered from the reflux condenser, and in which the intermediate fraction (iii) of step (c) comprises another part of the condensate.
8. A process according to any one of claims 1 to 4, in which the primary distillation zone comprises first and second distillation columns connected in series, in which the feed stream supplied to the first distillation column contains from about 15 mole % to about 40 mole % of monoalkyl maleate, in which



the material supplied to the second distillation column from the first distillation column comprises a substantially alkanol free fraction that is richer in dialkyl maleate than the feed stream, and in which the intermediate fraction (iii) of step (c) is recovered from the second distillation column.

- 5 9. A process according to any one of claims 1 to 4, in which the primary distillation zone comprises first and second distillation columns connected in series, in which a vaporous stream is taken from a part of the first distillation column intermediate the top and bottom thereof for supply to the second distillation column, and in which the intermediate fraction (iii) of step (c) is recovered from the second distillation column.
- 10 10. A process according to any one of claims 1 to 4, in which the primary distillation zone comprises first and second distillation columns connected in series, in which the first distillation column is provided with a reflux condenser in the path of an overhead vaporous fraction therefrom, in which the reflux condenser of the first distillation column is operated under partial condensation conditions so as to produce a substantially alkanol free condensate that comprises dialkyl maleate and maleic anhydride, in which a part of the condensate from the reflux condenser of the first distillation column is returned as a reflux stream to the first distillation column, in which a vaporous stream containing alkanol is recovered from the reflux condenser of the first distillation column, and in which another part of the condensate from the reflux condenser of the first distillation column is supplied to the second distillation column.
- 15 11. A process according to claim 9 or claim 10, in which the intermediate fraction (iii) of step (c) comprises material recovered in vapour form from a part of the second distillation column intermediate the top and bottom thereof.
- 20 12. A process according to claim 9 or claim 10, in which the second distillation column is provided with a reflux condenser in the path of an overhead vaporous stream therefrom, in which the reflux condenser of the second distillation column is operated under partial condensation conditions so as to produce a substantially alkanol free condensate that comprises dialkyl maleate and maleic anhydride, in which a part of the condensate from the reflux condenser of the second distillation column is returned as a reflux stream to the second distillation column, in which a vaporous stream containing alkanol is recovered from the reflux condenser of the second distillation column, and in which the intermediate fraction (iii) of step (c) comprises another part of the condensate from the reflux condenser of the second distillation column.
- 25 13. A process according to any one of claims 1 to 12, in which the vaporous fraction (ii) of step (c) is subjected to condensation conditions to condense condensable materials, including alkanol, therefrom.
- 30 14. A process according to any one of claims 1 to 13, in which the dialkyl maleate is diethyl maleate, in which the monoalkyl maleate is monoethyl maleate, and in which the alkanol is ethanol.
- 35 15. A process according to any one of claims 1 to 14, in which the feed stream contains also a minor amount of the corresponding dialkyl fumarate and in which the bottom fraction (ii) of step (d) contains also dialkyl fumarate.
- 40 16. A process according to claim 15, in which the feed stream contains from about 0.001 mole % up to about 5 mole % of dialkyl fumarate.

Patentansprüche

- 50 1. Kontinuierliches Verfahren zur Herstellung eines im wesentlichen säurefreien Dialkylmaleats aus einem eine größere Menge Dialkylmaleat und eine kleinere Menge Monoalkylmaleat enthaltenden Beschickungsstrom, bei dem man
- (a) den Beschickungsstrom kontinuierlich einer ersten Destillationszone zuführt,
- (b) den Beschickungsstrom kontinuierlich in der ersten Destillationszone unter die thermische Zersetzung von Monoalkylmaleat zu Maleinsäureanhydrid und Alkanol förderlichen Temperatur- und Druckbedingungen destilliert,
- 55 (c) aus der ersten Destillationszone (i) eine Monoalkylmaleat und Dialkylmaleat im Gemisch enthaltende Bodenfraktion, (ii) eine Alkanol umfassende dampfförmige Fraktion und (iii) eine Zwischenfraktion



tion gewinnt, die im wesentlichen frei von Alkanol ist und einen größeren Anteil Dialkylmaleat und einen kleineren Anteil Maleinsäureanhydrid enthält,

(d) die Zwischenfraktion (iii) aus Stufe (c) in einer zweiten Destillationszone kontinuierlich erneut destilliert unter Bildung (i) einer Maleinsäureanhydrid enthaltenden Kopffraktion und (ii) einer im wesentlichen säurefreien Dialkylmaleat enthaltenden Bodenfraktion, und

(e) die Bodenfraktion (ii) der Stufe (d) gewinnt.

2. Verfahren nach Anspruch 1, bei dem man die Bodenfraktion (ii) der Stufe (d) nach ihrer Gewinnung in der Stufe (e) einer Endneutralisationsstufe unterwirft.

3. Verfahren nach Anspruch 1 oder Anspruch 2, bei dem man die erste Destillationszone unter vermindertem Druck betreibt.

4. Verfahren nach Anspruch 3, bei dem man die erste Destillationszone bei einem Druck in dem Bereich von etwa 0,03 Bar bis etwa 0,33 Bar betreibt.

5. Verfahren nach einem der Ansprüche 1 bis 4, bei dem die erste Destillationszone eine einzige Destillationskolonne umfaßt und bei dem der ihr zugeführte Beschickungsstrom etwa 2 Mol-% bis etwa 40 Mol-% Monoalkylmaleat enthält.

6. Verfahren nach einem der Ansprüche 1 bis 5, bei dem die erste Destillationszone eine einzige Destillationskolonne umfaßt und bei dem die Zwischenfraktion (iii) der Stufe (c) einen dampfförmigen Strom umfaßt, der von einem Teil der Kolonne zwischen ihrem Kopf und ihrem Boden abgenommen wird.

7. Verfahren nach einem der Ansprüche 1 bis 5, bei dem die erste Destillationszone eine einzige Destillationskolonne umfaßt, die in dem Weg eines aus ihr kommenden dampfförmigen Kopfstroms mit einem Rückflußkondensator versehen ist, der Rückflußkondensator unter Teilkondensationsbedingungen betrieben wird, so daß ein im wesentlichen alkanolfreies, Dialkylmaleat und Maleinsäureanhydrid enthaltendes Kondensat erzeugt wird, ein Teil des Kondensats als Rückflußstrom auf die Kolonne zurückgegeben wird, die dampfförmige Fraktion (ii) der Stufe (c) aus dem Rückflußkondensator gewonnen wird und bei dem die Zwischenfraktion (iii) der Stufe (c) einen anderen Teil des Kondensats umfaßt.

8. Verfahren nach einem der Ansprüche 1 bis 4, bei dem die erste Destillationszone eine in Serie geschaltete erste und zweite Destillationskolonne umfaßt, der der ersten Destillationskolonne zugeführte Beschickungsstrom etwa 15 Mol-% bis etwa 40 Mol-% Monoalkylmaleat enthält, das aus der ersten Destillationskolonne der zweiten Destillationskolonne zugeführte Material eine im wesentlichen alkanolfreie Fraktion umfaßt, die reicher an Dialkylmaleat als der Beschickungsstrom ist, und die Zwischenfraktion (iii) der Stufe (c) aus der zweiten Destillationskolonne gewonnen wird.

9. Verfahren nach einem der Ansprüche 1 bis 4, bei dem die erste Destillationszone eine in Serie geschaltete erste und zweite Destillationskolonne umfaßt, aus einem Teil der ersten Destillationskolonne zwischen ihrem Kopf und Boden ein dampfförmiger Strom zwecks Zuführung zur zweiten Destillationskolonne abgezogen wird und die Zwischenfraktion (iii) der Stufe (c) aus der zweiten Destillationskolonne gewonnen wird.

10. Verfahren nach einem der Ansprüche 1 bis 4, bei dem die erste Destillationszone eine in Serie geschaltete erste und zweite Destillationskolonne umfaßt, die erste Destillationskolonne in dem Weg ihrer dampfförmigen Kopffraktion mit einem Rückflußkondensator versehen ist, der Rückflußkondensator der ersten Destillationskolonne unter Teilkondensationsbedingungen betrieben wird, so daß ein im wesentlichen alkanolfreies, Dialkylmaleat und Maleinsäureanhydrid umfassendes Kondensat erzeugt wird, ein Teil des Kondensats aus dem Rückflußkondensator der ersten Destillationskolonne als Rückflußstrom auf die erste Destillationskolonne zurückgegeben wird, ein Alkanol enthaltender dampfförmiger Strom aus dem Rückflußkondensator der ersten Destillationskolonne gewonnen wird und ein anderer Teil des Kondensats aus dem Rückflußkondensator der ersten Destillationskolonne der zweiten Destillationskolonne zugeführt wird.



11. Verfahren nach Anspruch 9 oder Anspruch 10, bei dem die Zwischenfraktion (iii) der Stufe (c) Material enthält, das in Dampfform aus einem Teil der zweiten Destillationskolonne zwischen ihrem Kopf und ihrem Boden gewonnen wurde.
12. Verfahren nach Anspruch 9 oder Anspruch 10, bei dem die zweite Destillationskolonne in dem Weg des abgehenden dampfförmigen Kopfstroms mit einem Rückflußkondensator versehen ist, der Rückflußkondensator der zweiten Destillationskolonne unter Teilkondensationsbedingungen betrieben wird, so daß ein im wesentlichen alkanolfreies, Dialkylmaleat und Maleinsäureanhydrid enthaltendes Kondensat erzeugt wird, ein Teil des Kondensats aus dem Rückflußkondensator der zweiten Destillationskolonne als Rückflußstrom zur zweiten Destillationskolonne zurückgegeben wird, ein Alkanol enthaltender dampfförmiger Strom aus dem Rückflußkondensator der zweiten Destillationskolonne gewonnen wird und die Zwischenfraktion (iii) der Stufe (c) einen anderen Teil des Kondensats aus dem Rückflußkondensator der zweiten Destillationskolonne aufweist.
13. Verfahren nach einem der Ansprüche 1 bis 12, bei dem die dampfförmige Fraktion (ii) der Stufe(c) Kondensationsbedingungen unterworfen wird, um kondensierbare Materialien einschließlich Alkanol aus ihr zu kondensieren.
14. Verfahren nach einem der Ansprüche 1 bis 13, bei dem das Dialkylmaleat Diäthylmaleat ist, das Monoalkylmaleat Monoäthylmaleat ist und das Alkanol Äthanol ist.
15. Verfahren nach einem der Ansprüche 1 bis 14, bei dem der Beschickungsstrom auch eine geringere Menge des entsprechenden Dialkylfumarats enthält und die Bodenfraktion (ii) der Stufe (d) auch Dialkylfumarat enthält.
16. Verfahren nach Anspruch 15, bei dem der Beschickungsstrom etwa 0,001 Mol-% bis etwa 5 Mol-% Dialkylfumarat enthält.

Revendications

1. Procédé continu de production d'un dialcoylmaléate, pratiquement exempt d'acide, à partir d'un courant de charge contenant une proportion majeure de dialcoylmaléate et une proportion mineure de monoalcoylmaléate, qui consiste :
- (a) à envoyer de manière continue le courant de charge à une zone de distillation primaire,
- (b) à distiller de manière continue le courant de charge dans la zone de distillation primaire dans des conditions de température et de pression favorisant une décomposition thermique du monoalcoylmaléate de façon à donner de l'anhydride maléique et un alcanol,
- (c) à récupérer, à partir de la zone de distillation primaire, (i) une fraction de partie inférieure contenant du monoalcoylmaléate et du dialcoylmaléate mélangés, (ii) une fraction, à l'état de vapeur, comprenant l'alcanol et (iii) une fraction intermédiaire qui est pratiquement exempte d'alcanol et qui comprend une proportion majeure de dialcoylmaléate et une proportion mineure d'anhydride maléique,
- (d) à redistiller de manière continue la fraction intermédiaire (iii) provenant de l'opération (c) dans une zone de distillation secondaire de façon à donner (i) une fraction de partie supérieure contenant l'anhydride maléique et (ii) une fraction de partie inférieure contenant du dialcoylmaléate pratiquement exempt d'acide et
- (e) à récupérer la fraction de partie inférieure (ii) de l'opération (d).
2. Procédé suivant la revendication 1, selon lequel, après avoir été récupérée dans l'opération (e), la fraction de partie inférieure (ii) de l'opération (d) est soumise à une opération de neutralisation finale.
3. Procédé suivant la revendication 1 ou 2, selon lequel on fait fonctionner la zone de distillation primaire sous pression réduite.
4. Procédé suivant la revendication 3, selon lequel on fait fonctionner la zone de distillation primaire à une pression comprise entre environ 0,03 bar et environ 0,33 bar.
5. Procédé suivant l'une quelconque des revendications 1 à 4, selon lequel la zone de distillation primaire



comprend une colonne de distillation unique et selon lequel le courant de charge envoyé à cette dernière contient d'environ 2 moles % à environ 40 moles % de monoalcoylmaléate.

- 5 6. Procédé suivant l'une quelconque des revendications 1 à 5, selon lequel la zone de distillation primaire comprend une colonne de distillation unique et selon lequel la fraction intermédiaire (iii) de l'opération (c) comprend un courant, à l'état de vapeur, provenant d'une partie de la colonne qui est intermédiaire entre sa partie supérieure et sa partie inférieure.
- 10 7. Procédé suivant l'une quelconque des revendications 1 à 5, selon lequel la zone de distillation primaire comprend une colonne de distillation unique pourvue d'un condenseur à reflux disposé sur le trajet d'un courant de partie de tête, à l'état de vapeur, provenant de cette colonne, on fait fonctionner le condenseur à reflux dans des conditions de condensation partielle de façon à produire un condensat, pratiquement exempt d'alcanol, qui contient du dialcoylmaléate et de l'anhydride maléique, on renvoie une partie du condensat à la colonne sous la forme d'un courant de reflux, on récupère la fraction à 15 l'état de vapeur (ii) de l'opération (c) à partir du condenseur à reflux et la fraction intermédiaire (iii) de l'opération (c) comprend une autre partie du condensat.
- 20 8. Procédé suivant l'une quelconque des revendications 1 à 4, selon lequel la zone de distillation primaire comprend une première et une seconde colonnes de distillation reliées en série, le courant de charge envoyé à la première colonne de distillation contient d'environ 15 moles % à environ 40 moles % de monoalcoylmaléate, la matière envoyée à la seconde colonne de distillation à partir de la première colonne de distillation comprend une fraction, pratiquement exempte d'alcanol, qui est plus riche en dialcoylmaléate que le courant de charge et on récupère la fraction intermédiaire (iii) de l'opération (c) à partir de la seconde colonne de distillation.
- 25 9. Procédé suivant l'une quelconque des revendications 1 à 4, selon lequel la zone de distillation primaire comprend une première et une seconde colonnes de distillation reliées en série, on prélève un courant, à l'état de vapeur, à partir d'une partie de la première colonne de distillation qui est intermédiaire entre sa partie supérieure et sa partie inférieure en vue de l'envoyer à la seconde colonne de distillation et on récupère la fraction intermédiaire (iii) de l'opération (c) à partir de la seconde colonne de distillation.
- 30 10. Procédé suivant l'une quelconque des revendications 1 à 4, selon lequel la zone de distillation primaire comprend une première et une seconde colonnes de distillation reliées en série, la première colonne de distillation est pourvue d'un condenseur à reflux disposé sur le trajet de la fraction de partie supérieure, à l'état de vapeur, provenant de cette colonne, on fait fonctionner le condenseur à reflux de la première colonne de distillation dans des conditions de condensation partielle de façon à produire un condensat, pratiquement exempt d'alcanol, qui comprend du dialcoylmaléate et de l'anhydride maléique, on renvoie une partie du condensat provenant du condenseur à reflux de la première colonne de distillation, sous la forme d'un courant de reflux, à la première colonne de distillation, on récupère un 35 courant, à l'état de vapeur, contenant l'alcanol, à partir du condenseur à reflux de la première colonne de distillation et on envoie à la seconde colonne de distillation une autre partie du condensat provenant du condenseur à reflux de la première colonne de distillation.
- 40 11. Procédé suivant la revendication 9 ou 10, selon lequel la fraction intermédiaire (iii) de l'opération (c) comprend une matière récupérée à l'état de vapeur à partir d'une partie de la seconde colonne de distillation qui est intermédiaire entre sa partie supérieure et sa partie inférieure.
- 45 12. Procédé suivant la revendication 9 ou 10, selon lequel la seconde colonne de distillation est pourvue d'un condenseur à reflux disposé sur le trajet d'un courant de partie supérieure, à l'état de vapeur, provenant de cette colonne, on fait fonctionner le condenseur à reflux de la seconde colonne de distillation dans des conditions de condensation partielle de façon à produire un condensat, pratiquement exempt d'alcanol, qui comprend du dialcoylmaléate et de l'anhydride maléique, on renvoie une 50 partie du condensat provenant du condenseur à reflux de la seconde colonne de distillation, sous la forme d'un courant de reflux, à la seconde colonne de distillation, on récupère un courant, à l'état de vapeur, contenant l'alcanol, à partir du condenseur à reflux de la seconde colonne de distillation et la 55 fraction intermédiaire (iii) de l'opération (c) comprend une autre partie du condensat provenant du condenseur à reflux de la seconde colonne de distillation.



13. Procédé suivant l'une quelconque des revendications 1 à 12, selon lequel on soumet la fraction à l'état de vapeur (ii) de l'opération (c) à des conditions de condensation afin de condenser les matières condensables, y compris l'alcool, à partir de cette fraction.
- 5 14. Procédé suivant l'une quelconque des revendications 1 à 13, selon lequel le dialcoylmaléate est le diéthylmaléate, le monoalcoylmaléate est le monoéthylmaléate et l'alcool est l'éthanol.
- 10 15. Procédé suivant l'une quelconque des revendications 1 à 14, selon lequel le courant de charge contient aussi une proportion mineure du dialcoylfumarate correspondant et la fraction de partie inférieure (ii) de l'opération (d) contient aussi du dialcoylfumarate.
16. Procédé suivant la revendication 15, selon lequel le courant de charge contient d'environ 0,001 mole % à environ 5 moles % de dialcoylfumarate.

15

20

25

30

35

40

45

50

55