

(12) 특허협력조약에 의하여 공개된 국제출원

(19) 세계지식재산권기구
국제사무국



(43) 국제공개일
2011년 7월 7일 (07.07.2011)

PCT

(10) 국제공개번호
WO 2011/081270 A1

- (51) 국제특허분류:
G02C 5/12 (2006.01) G02C 5/00 (2006.01)
- (21) 국제출원번호: PCT/KR2010/004678
- (22) 국제출원일: 2010년 7월 19일 (19.07.2010)
- (25) 출원언어: 한국어
- (26) 공개언어: 한국어
- (30) 우선권정보:
10-2009-0133489 2009년 12월 28일 (28.12.2009) KR
- (72) 발명자: 김
- (71) 출원인: 김정민 (KIM, Jeong-min) [KR/KR]; 부산광역시 부산진구 전포동 587번지 서면롯데캐슬스카이 103-3201호, 614-030 Busan (KR).
- (81) 지정국 (별도의 표시가 없는 한, 가능한 모든 종류의 국내 권리의 보호를 위하여): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,

EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) 지정국 (별도의 표시가 없는 한, 가능한 모든 종류의 역내 권리의 보호를 위하여): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), 유라시아 (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), 유럽 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

공개:


- 국제조사보고서와 함께 (조약 제 21 조(3))

[다음 쪽 계속]

(54) Title: EYEGGLASS NOSE SUPPORT

(54) 발명의 명칭: 안경테용 코걸이

도 2

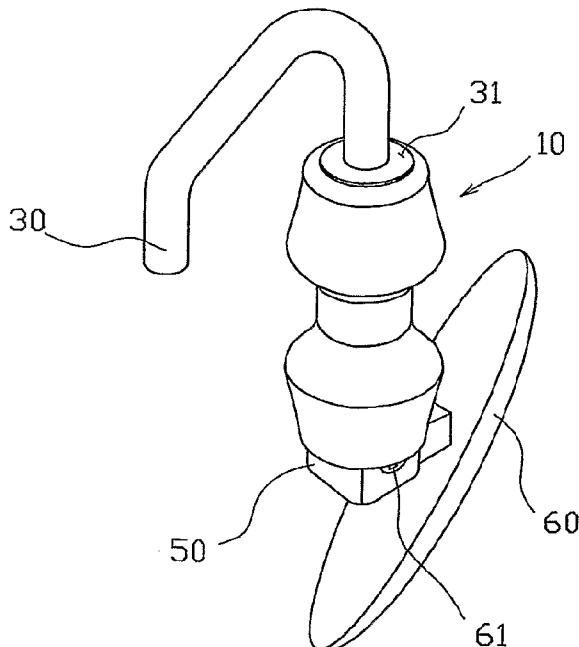

(57) Abstract: The present invention relates to an eyeglass nose support, comprising: a fitting (30) welded to an eyeglass frame (5); a T-shaped fixing leg (40) welded to the fitting (30), and tightly inserted into a second hole (11-1) and a first insertion hole (11-3) of a silicon tube (10); a reinforcing plate (31) assembled between the fitting (30) and the T-shaped fixing leg (40) such that the reinforcing plate (31) tightly contacts an upper surface of the silicon tube (10) when the T-shaped fixing leg (40) is inserted into the second hole (11-1) and the first insertion groove (11-3) of the silicon tube (10); said silicon tube (10) which has an upper portion in which the second hole (11-1) and the first insertion groove (11-3) are formed together into a T-shape so as to enable the entirety of the T-shaped fixing leg (40) to be tightly inserted into the second hole (11-1) and the first insertion groove (11-3), and a lower portion in which a second hole (11-2) and a second insertion groove (11-4) are formed so as to enable the entirety of a T-shaped fixing protrusion (51) of a nose support assembling fitting (50) to be tightly inserted into the second hole (11-2) and the second insertion groove (11-4), wherein a first hole (11) having a diameter identical to those of the second hole (11-1) and of the third hole (11-2) penetrates between the first insertion groove (11-3) and the second insertion groove (11-4), and wherein reinforcing protrusions (12, 12a) having the largest diameter are formed outside the first insertion groove (11-3) and the second insertion groove (11-4), respectively, and wherein a recess (13) having a diameter smaller than those of the reinforcing protrusions (12, 12a) is formed between the reinforcing protrusions (12, 12a);

and the nose support assembling fitting (50) having the T-shaped fixing protrusion (51) to be tightly inserted into the third hole (11-2) and the second insertion groove (11-4) of the silicon tube (10), wherein the T-shaped fixing protrusion (51) is integrally formed with the nose support assembling fitting (50) or welded to the nose support assembling fitting (50), and wherein the nose support assembling fitting (50) is configured such that a nose support (60) is fastened thereto by means of a screw (61).

(57) 요약서:

[다음 쪽 계속]

WO 2011/081270 A1