

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2005 (29.12.2005)

PCT

(10) International Publication Number
WO 2005/124069 A1

(51) International Patent Classification⁷: **E05B 47/06**

(21) International Application Number:
PCT/SE2005/000983

(22) International Filing Date: 22 June 2005 (22.06.2005)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0401610-1 22 June 2004 (22.06.2004) SE

(71) Applicant (for all designated States except US): **ASSA AB**
[SE/SE]; Box 371, S-631 05 Eskilstuna (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **COLLIN, Kjell**
[SE/SE]; Gillbergavägen 36, S-632 30 Eskilstuna (SE).

(74) Agents: **ESTREEN, Lars** et al.; Kransell & Wennborg
KB, Box 27834, S-115 93 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A DEVICE FOR MECHANICAL GUIDING, A LOCK MODULE AND A LOCK DEVICE COMPRISING SUCH A DEVICE

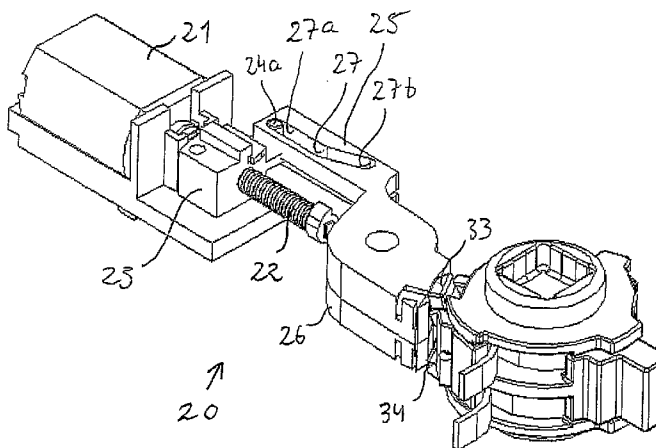

(57) Abstract: A device for mechanically guiding components in a lock arrangement, preferably for guiding a follower unit, comprising an electrically actuatable manoeuvring element (21) preferably a motor. A first engagement element (23, 24) is coupled mechanically to the manoeuvring element for linear movement along a movement axis between a first and a second end position. A first arm (25) which is rotatable about a rotatable shaft (A) includes a second engagement element (27) located in mechanical engagement with the first engagement element. Because each of the first and second engagement elements (23, 24, 27) includes a groove (27) which extends at least partially out of parallel with the movement axis of the first engagement element, the first arm is caused to rotate when the first engagement element moves linearly. This results in a simple and flexible guide device.

WO 2005/124069 A1