(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
22 January 2009 (22.01.2009)

PCT

(10) International Publication Number
WO 2009/010089 A1

(51) International Patent Classification:
B63B 22/02 (2006.01)

(21) International Application Number:
PCT/EP2007/057319

(22) International Filing Date: 16 July 2007 (16.07.2007)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant *(for all designated States except US)*: **Bluewater Energy Services B.V.** [NL/NL]; Marsstraat 33, NL-2132 HR Hoofddorp (NL).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **DE BAAN, Jacob** [NL/NL]; Kamerlingh Onneslaan 8, NL-3146 BH Maassluis (NL).

(74) Agents: **VONCKEN, Bartholomeus Maria Christiaan** et al.; Overschiestraat 180, NL-1062 XK Amsterdam (NL).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

(54) **Title:** ASSEMBLY OF TURRET AND DISCONNECTABLE BUOY

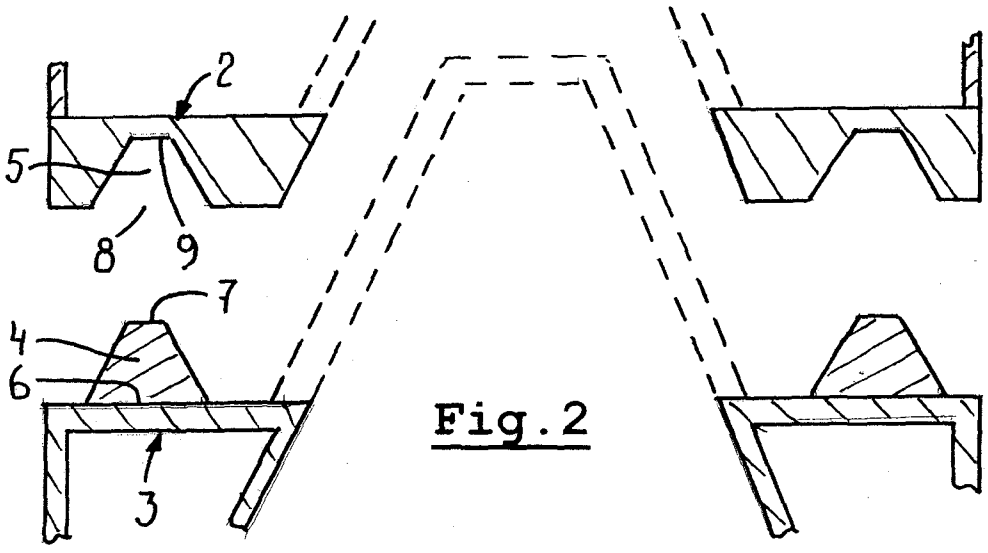


Fig.2

(57) **Abstract:** Assembly of turret (2) and disconnectable buoy (3), in which the turret at its lower end and the buoy at its upper end are provided with mating coupling provisions. The coupling provisions comprise an annular projection (4) protruding from one of the turret and buoy towards the other of the turret and buoy and a correspondingly shaped annular recess (5) on the other of the turret and buoy for receiving the annular projection. The annular projection has a base (6) which is wider than a top (7) thereof, whereas the annular recess has a top (8) which is wider than a base (9) thereof.

WO 2009/010089 A1