

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
12 April 2001 (12.04.2001)

PCT

(10) International Publication Number
WO 01/25637 A1

- (51) International Patent Classification⁷: F04B 43/12 (74) Agent: L & K PATENT FIRM; 701, Daekun Building, 822-5, Yeoksam-Dong, Kangnam-Gu, Seoul 135-080 (KR).
- (21) International Application Number: PCT/KR00/01074
- (22) International Filing Date: 26 September 2000 (26.09.2000) (81) Designated States (national): AU, CA, CN, JP, KP, SG, ZA.
- (25) Filing Language: English
- (26) Publication Language: English (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- (30) Priority Data:
1999/21543 U 7 October 1999 (07.10.1999) KR
2000/46515 11 August 2000 (11.08.2000) KR
- Published:
— With international search report.
- (71) Applicant and
(72) Inventor: RHA, Phil-Chan [KR/KR]; 205-704, Dujeong 2-cha Daewoo Apt., Dujeong-Dong, Cheonan-city, Chungcheongnam-Do 330-210 (KR).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TUBE PUMP

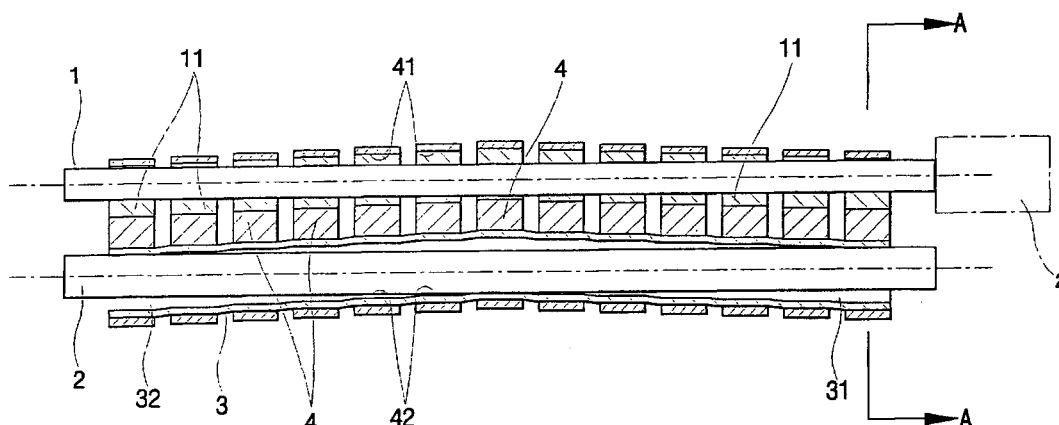

(57) Abstract: Disclosed is a tube pump. The tube pump comprises a driving shaft having a plurality of eccentric cams which are mounted to the driving shaft in a manner such that positions of top dead centers of the eccentric cams are sequentially lowered and then raised along a fluid flowing direction, the plurality of eccentric cams being spaced apart one from another by a predetermined distance; a fixed shaft positioned parallel to the driving shaft; a tube having an inner diameter which is larger than a diameter of the fixed shaft and surrounding the fixed shaft; and a plurality of actuation rods formed, at upper portions thereof, with a plurality of cam inserting holes into which the plurality of eccentric cams are respectively inserted and, at lower portions thereof, with a plurality of tube inserting slots through which the tube is inserted, the plurality of actuation rods being repeatedly raised and lowered in such a way as to be interlocked with rotation of the plurality of eccentric cams.

WO 01/25637 A1