

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 November 2008 (06.11.2008)

PCT

(10) International Publication Number
WO 2008/132273 A1

(51) International Patent Classification:
E05B 15/10 (2006.01)

KERVINEN, Jari [FI/FI]; Hillerinkatu 12, FI-80230 Joensuu (FI).

(21) International Application Number:
PCT/FI2008/050173

(74) Agent: **AWEK INDUSTRIAL PATENTS LTD OY**; P.O. Box 230, (Lautarhankatu 6), FI-00101 Helsinki (FI).

(22) International Filing Date: 9 April 2008 (09.04.2008)

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20075296 27 April 2007 (27.04.2007) FI

(71) Applicant (*for all designated States except US*): **ABLOY OY** [FI/FI]; Wahlforssinkatu 20, FI-80100 Joensuu (FI).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **HELISTEN, Mika** [FI/FI]; Ratapolku 4 B 10, FI-80400 Ylämylly (FI).

[Continued on next page]

(54) Title: DOOR LOCK

(57) Abstract: A door lock with a bolt, wherein the bolt pieces of the dual-action bolt are prevented from turning away from each other as the bolt pieces have two projections (24, 26) arranged to cooperate with the inner surface (30) of the front plate. In relation to the support of the bolt piece on the shaft (29), one of the projections (26) is arranged on the opposite side in the axial direction compared to the other away-facing projection.

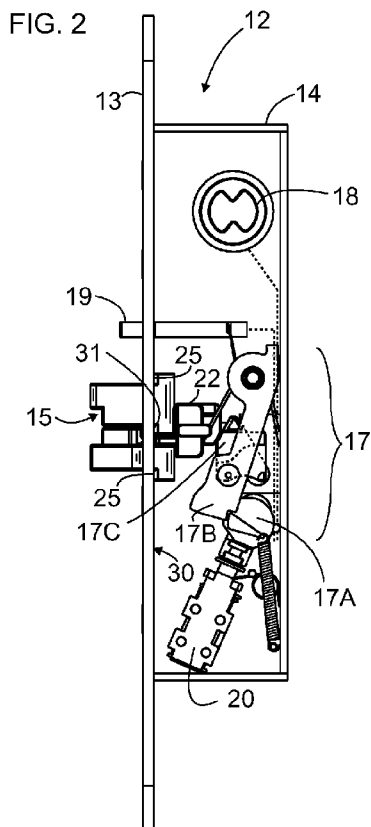



FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Published:

— *with international search report*