



(51) International Patent Classification:

F02C 7/04 (2006.01) *F28D 15/02* (2006.01)
F02C 7/047 (2006.01)

(21) International Application Number:

PCT/US2013/022398

(22) International Filing Date:

21 January 2013 (21.01.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/593,083 31 January 2012 (31.01.2012) US
13/366,419 6 February 2012 (06.02.2012) US

(71) Applicant: **UNITED TECHNOLOGIES CORPORATION** [US/US]; One Financial Plaza, Hartford, Connecticut 06101 (US).

(72) Inventors: **FEULNER, Matthew R.**; 4 Bainbridge Rd, West Hartford, Connecticut 06119 (US). **LIAO, Sheng-fang**; 33 Westview Terrace, Unionville, Connecticut 06085 (US).

(74) Agent: **OLDS, Theodore W.**; Carlson, Gaskey & Olds/Pratt & Whitney, c/o CPA Global, P.O. Box 52050, Minneapolis, Minnesota 55402 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: ANTI-ICING STATOR ASSEMBLY FOR A GAS TURBINE

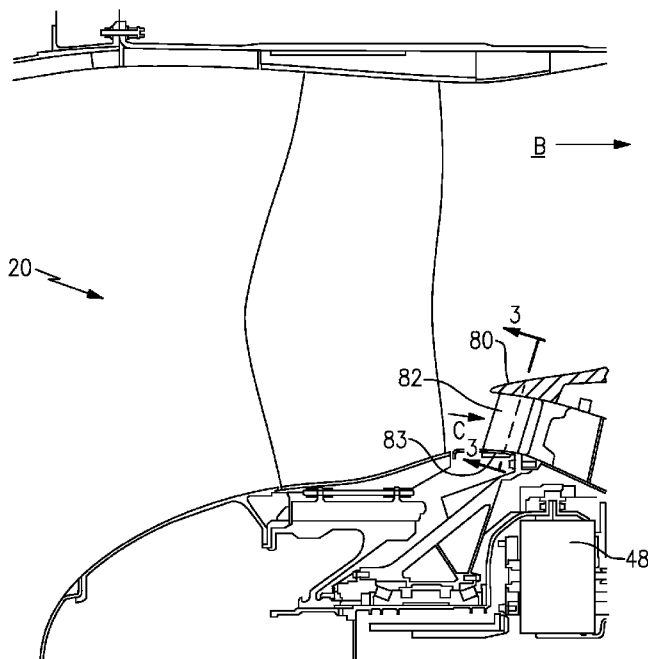

(57) Abstract: A gas turbine engine is defined wherein the inlet guide vanes leading into a core engine flow path are sized and positioned such that flow paths positioned circumferentially intermediate the vane are sufficiently large that a hydraulic diameter of greater than or equal to about 1.5 is achieved. This will likely reduce the detrimental affect of icing.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*
- (88) Date of publication of the international search report:**
22 May 2014