



- (51) **International Patent Classification:**
H04B 1/10 (2006.01) *H04L 25/08* (2006.01)
- (21) **International Application Number:**
PCT/MY2012/000073
- (22) **International Filing Date:**
30 March 2012 (30.03.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant (for all designated States except US):** INTEL CORPORATION [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** AW, Chee, Hong [MY/MY]; 25, Jalan Kangar 87, Kaw 19, Off Jalan Kapar, 41400 Klang, Selangor (MY).
- (74) **Agent:** ABDULLAH, Mohamad, Bustaman; c/o Bustaman, Lot C9-3, Jalan Selaman 1, Dataran Palma, 68000 Ampang, Selangor (MY).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) **Title:** INVERTER-AND-SWITCHED-CAPACITOR-BASED SQUELCH DETECTOR APPARATUS AND METHOD

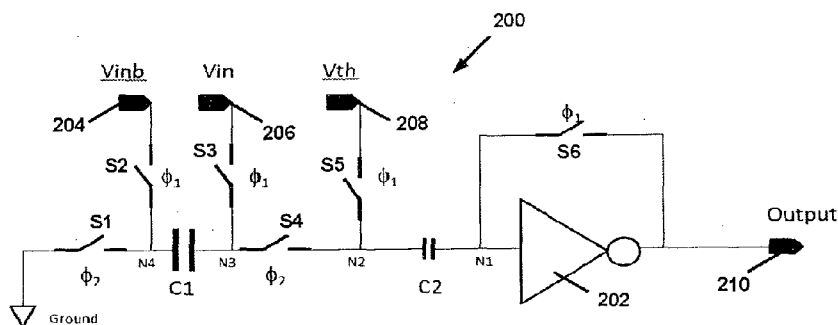

(57) **Abstract:** A squelch detector includes is configured to receive a time-varying differential communication signal, and includes switched capacitors and an inverter configured to provide an indication of whether a level of the received communication signal is above or below a threshold value.