

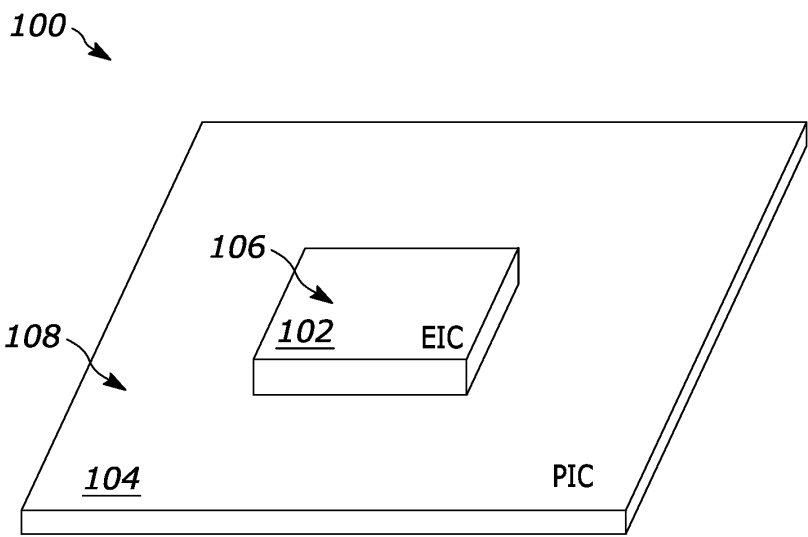


FIG. 1A

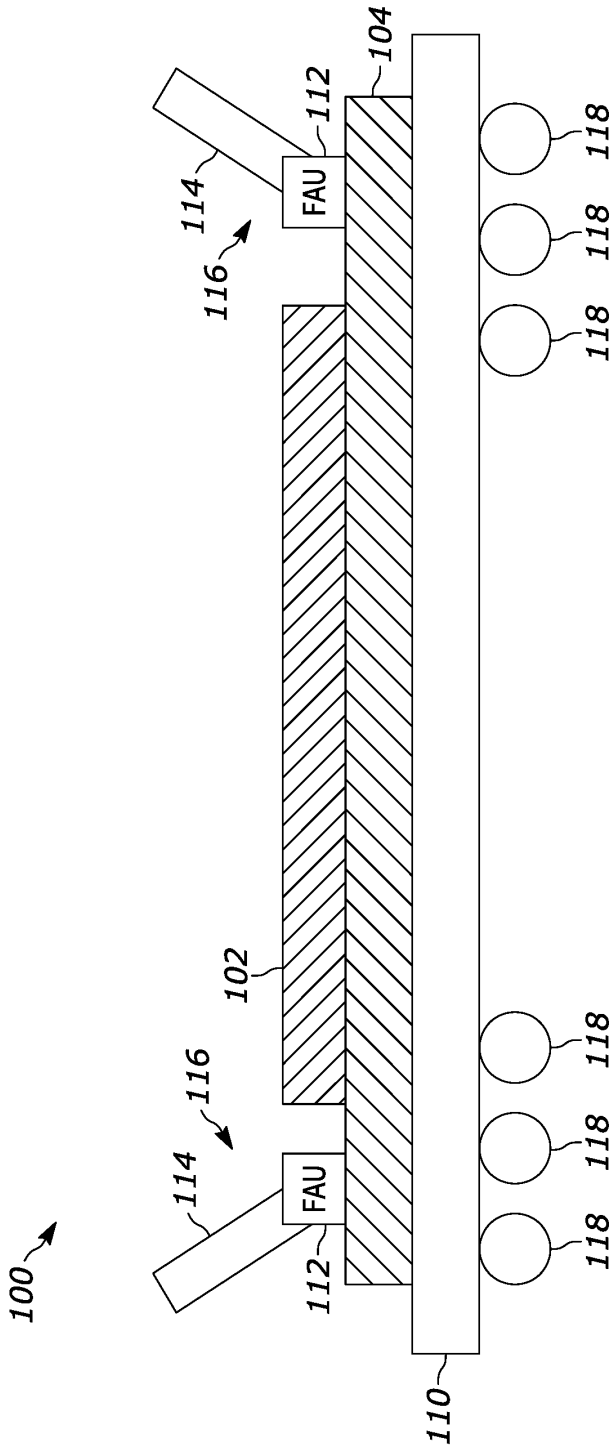


FIG. 1B

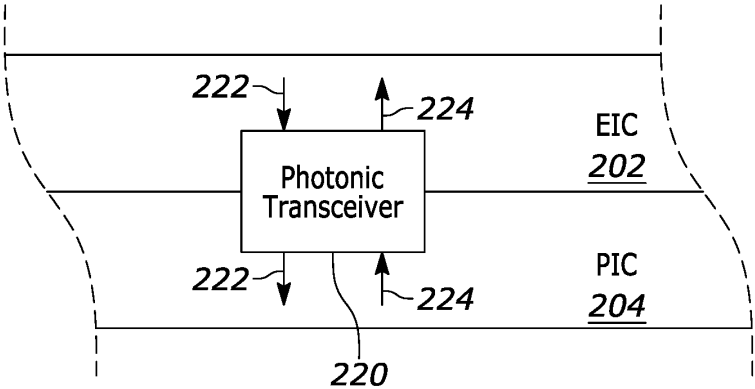


FIG. 2A

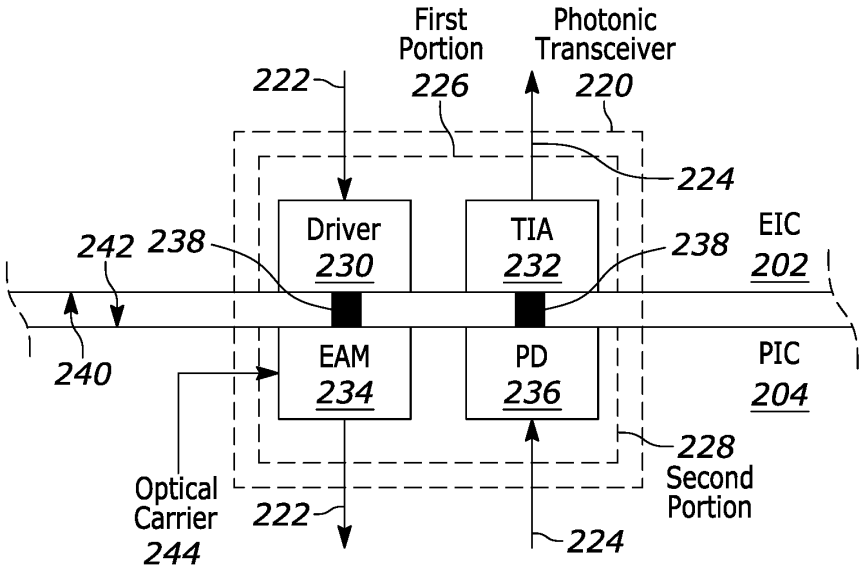


FIG. 2B

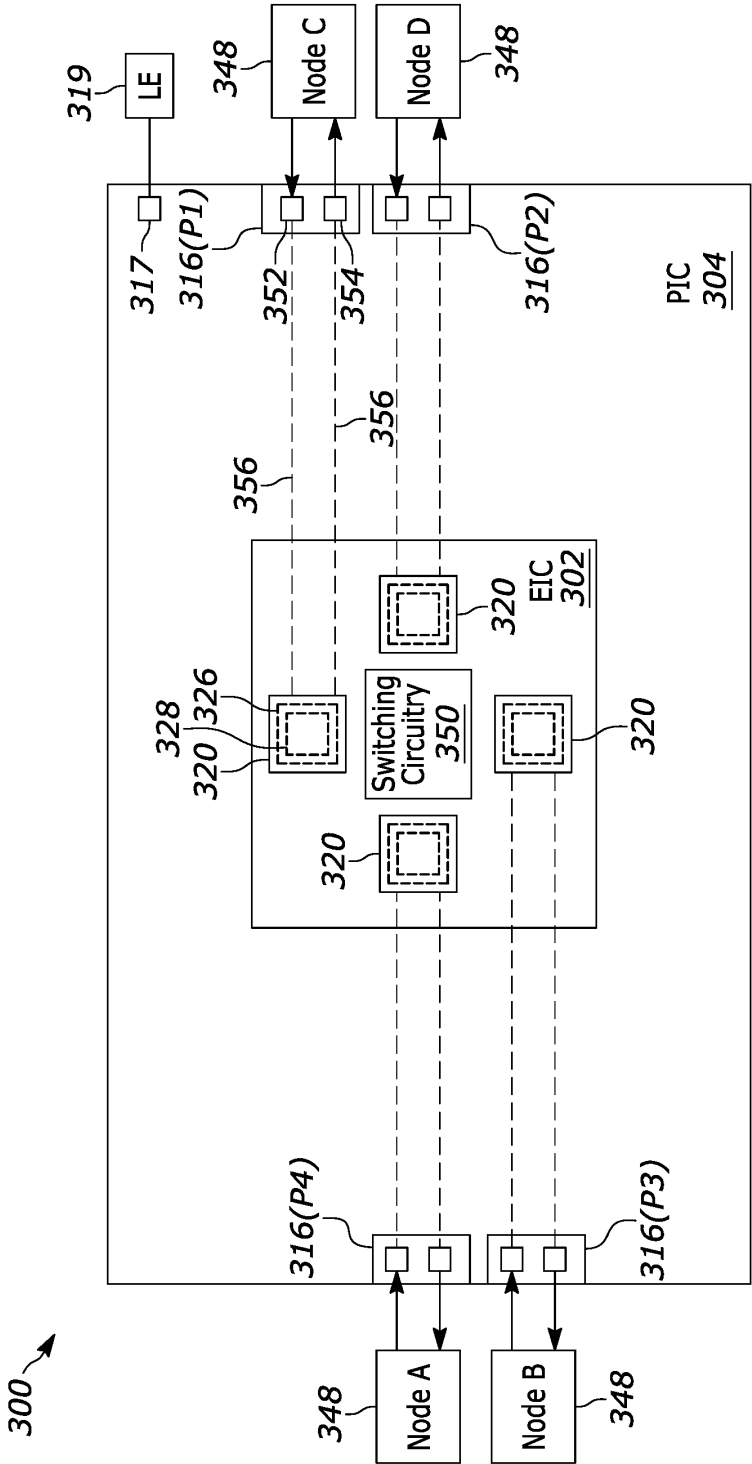


FIG. 3A

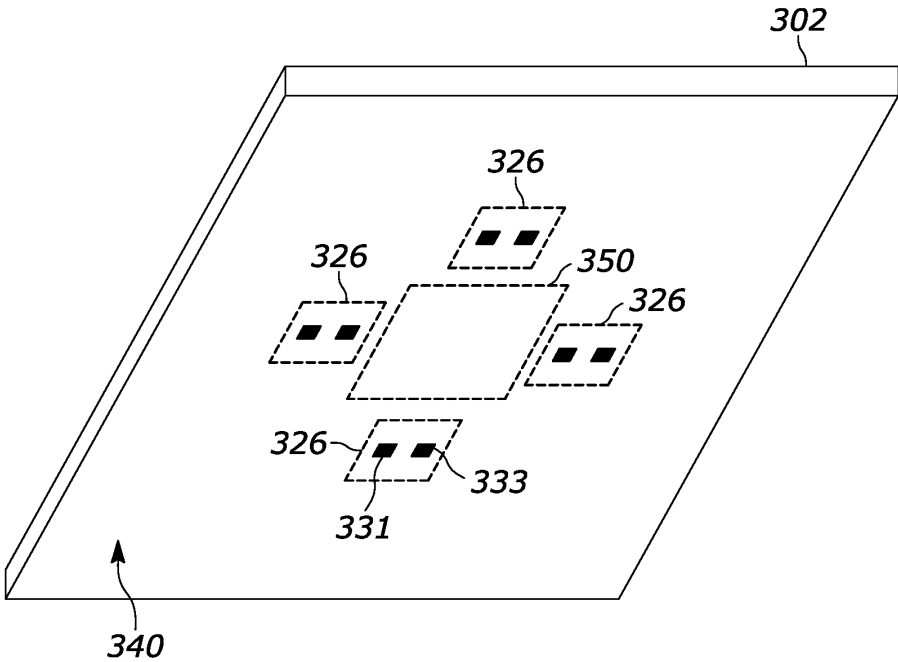
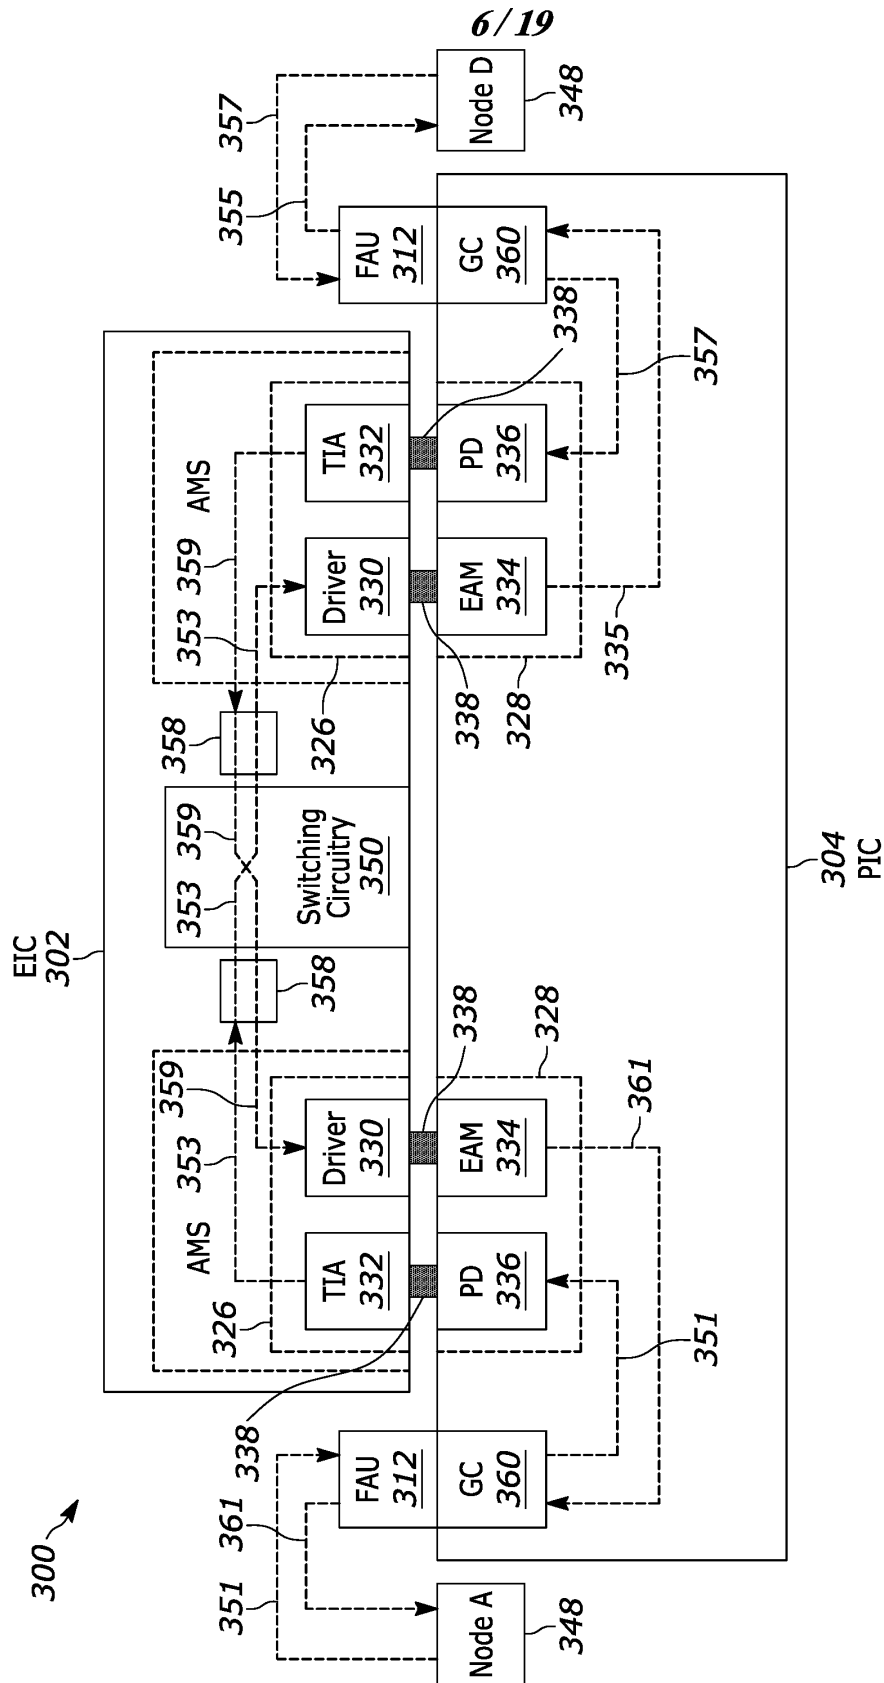


FIG. 3B



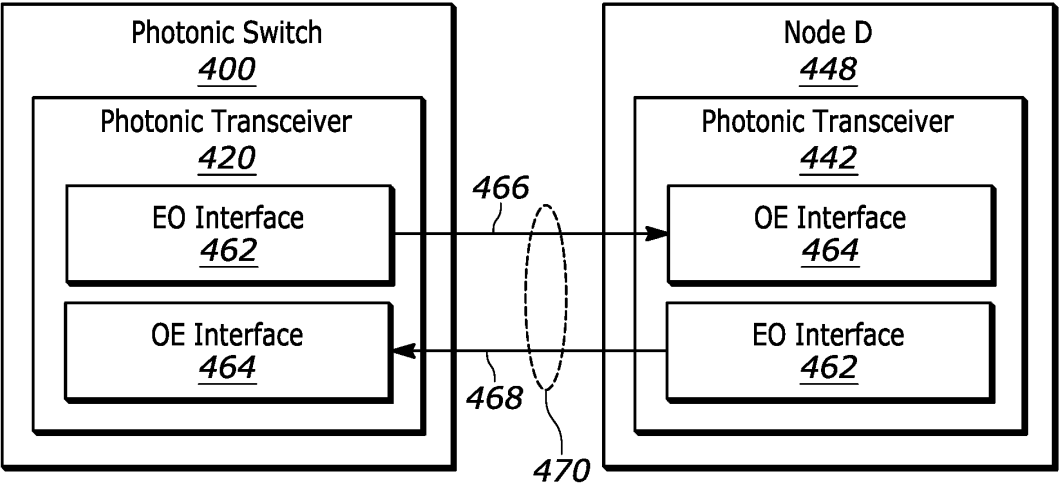


FIG. 4

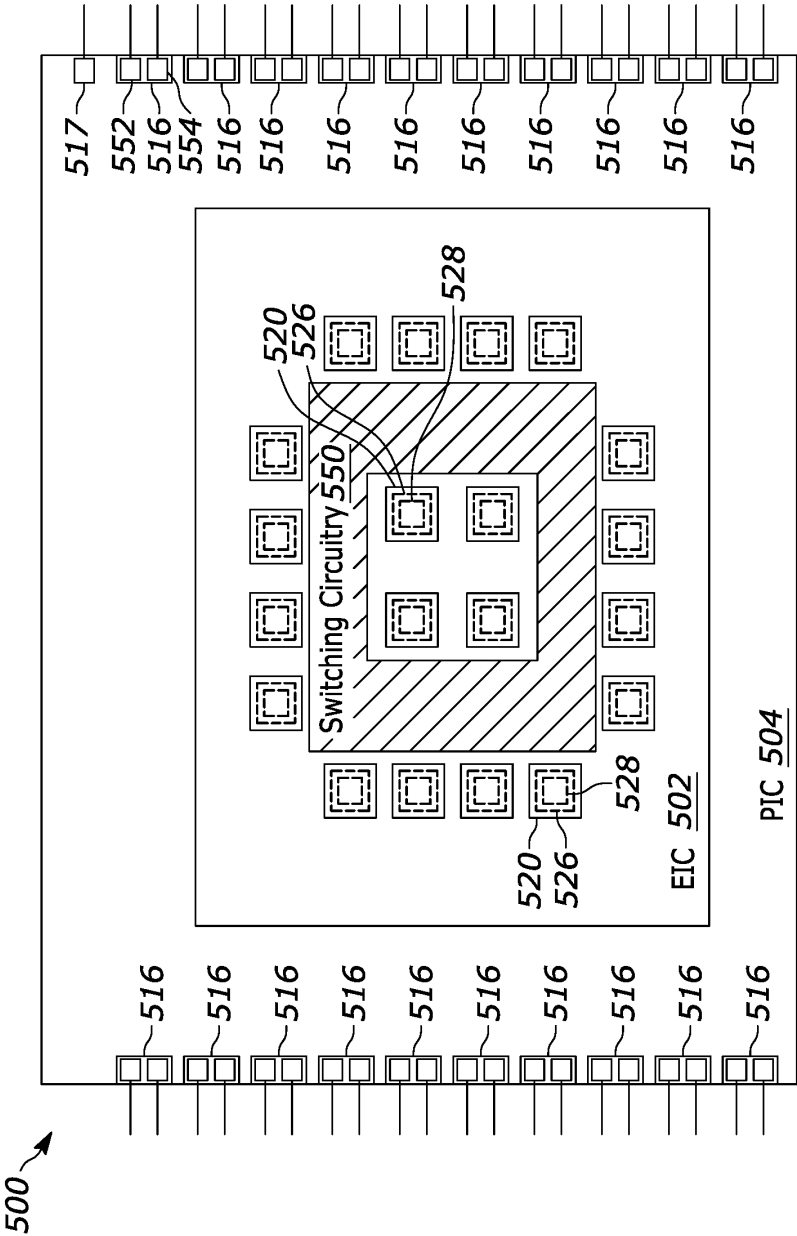


FIG. 5A

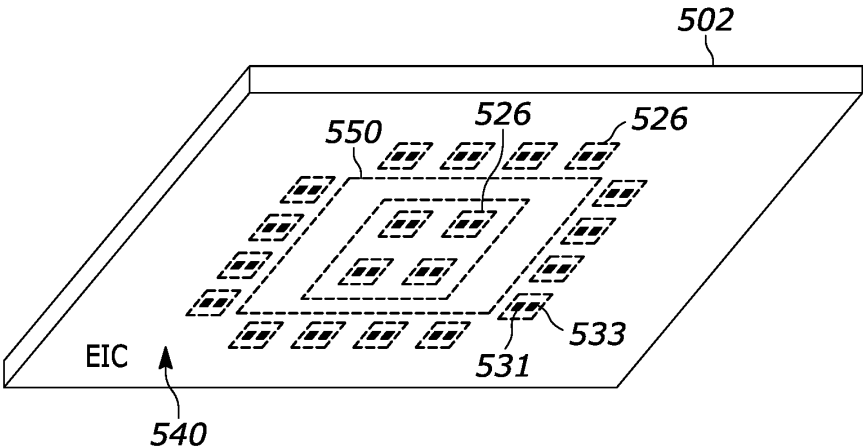


FIG. 5B

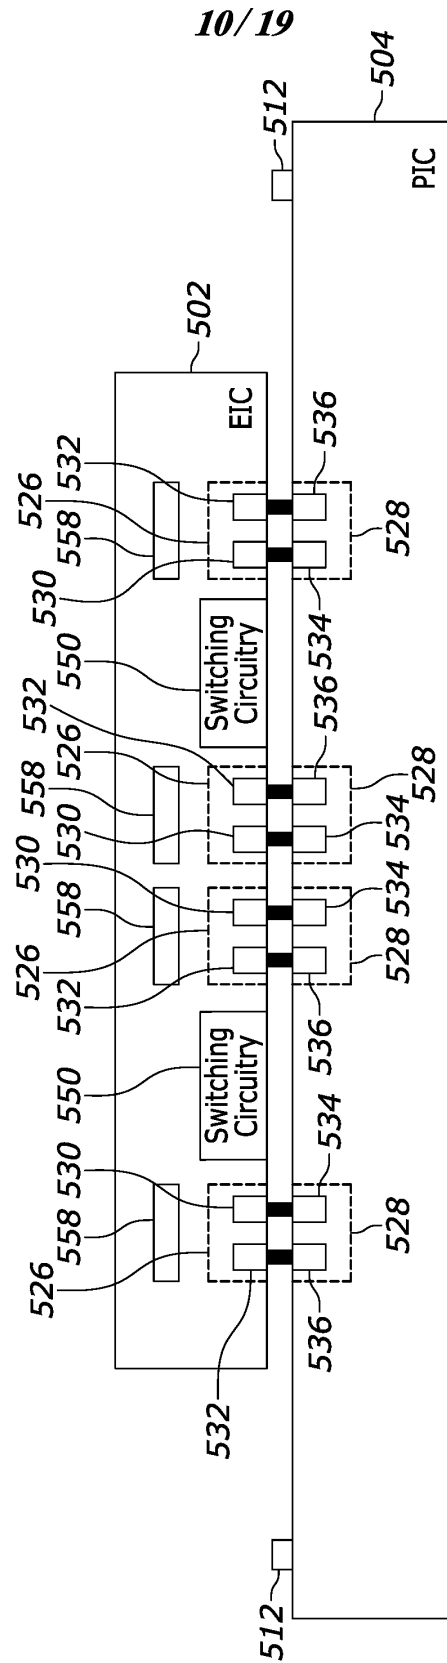


FIG. 5C

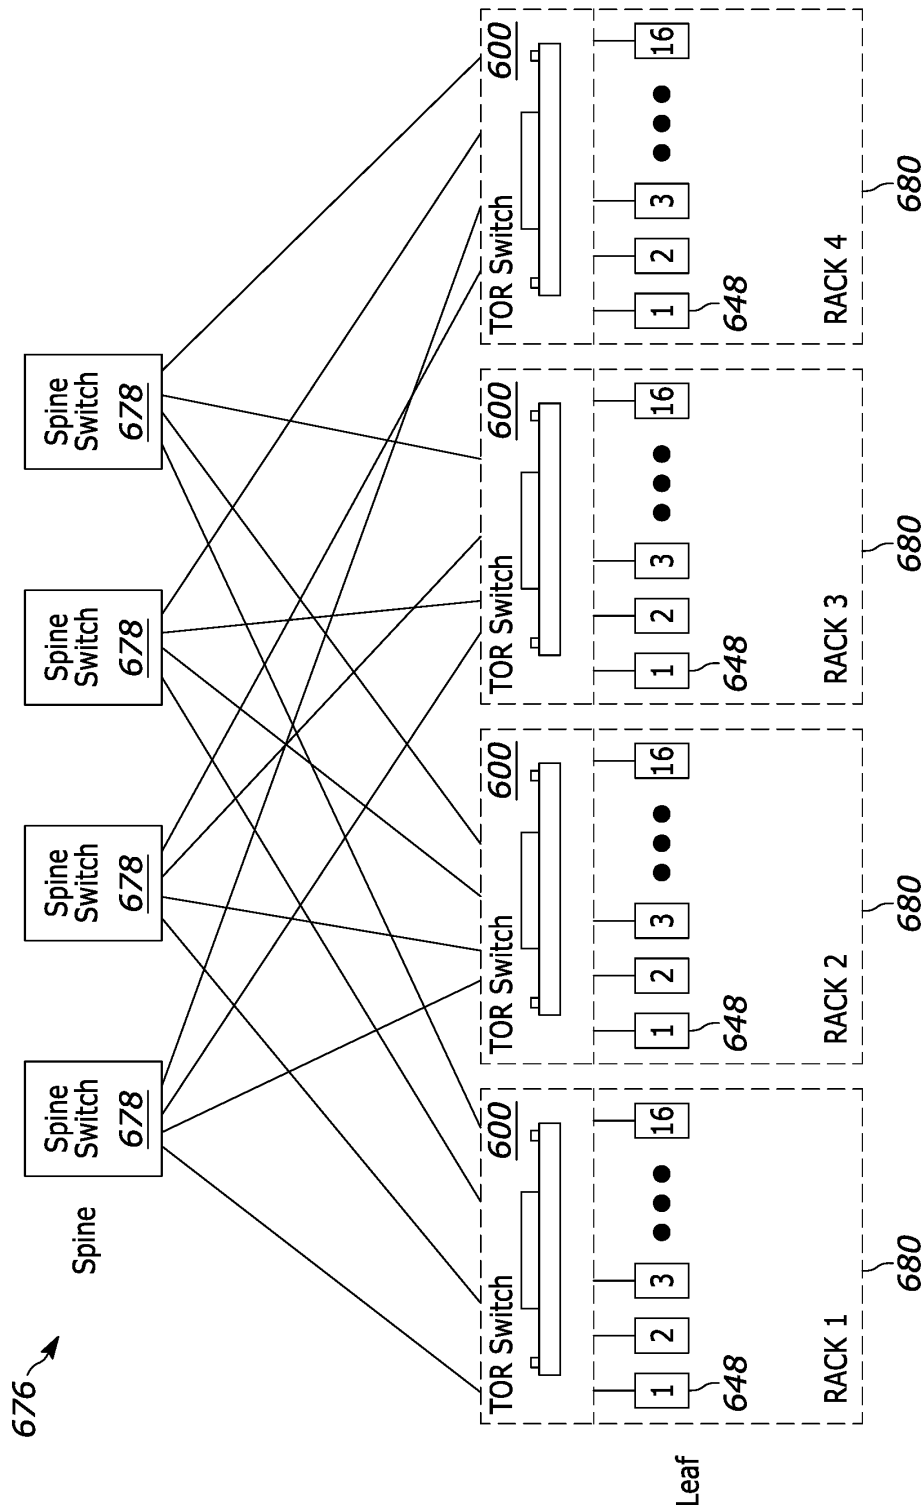


FIG. 6

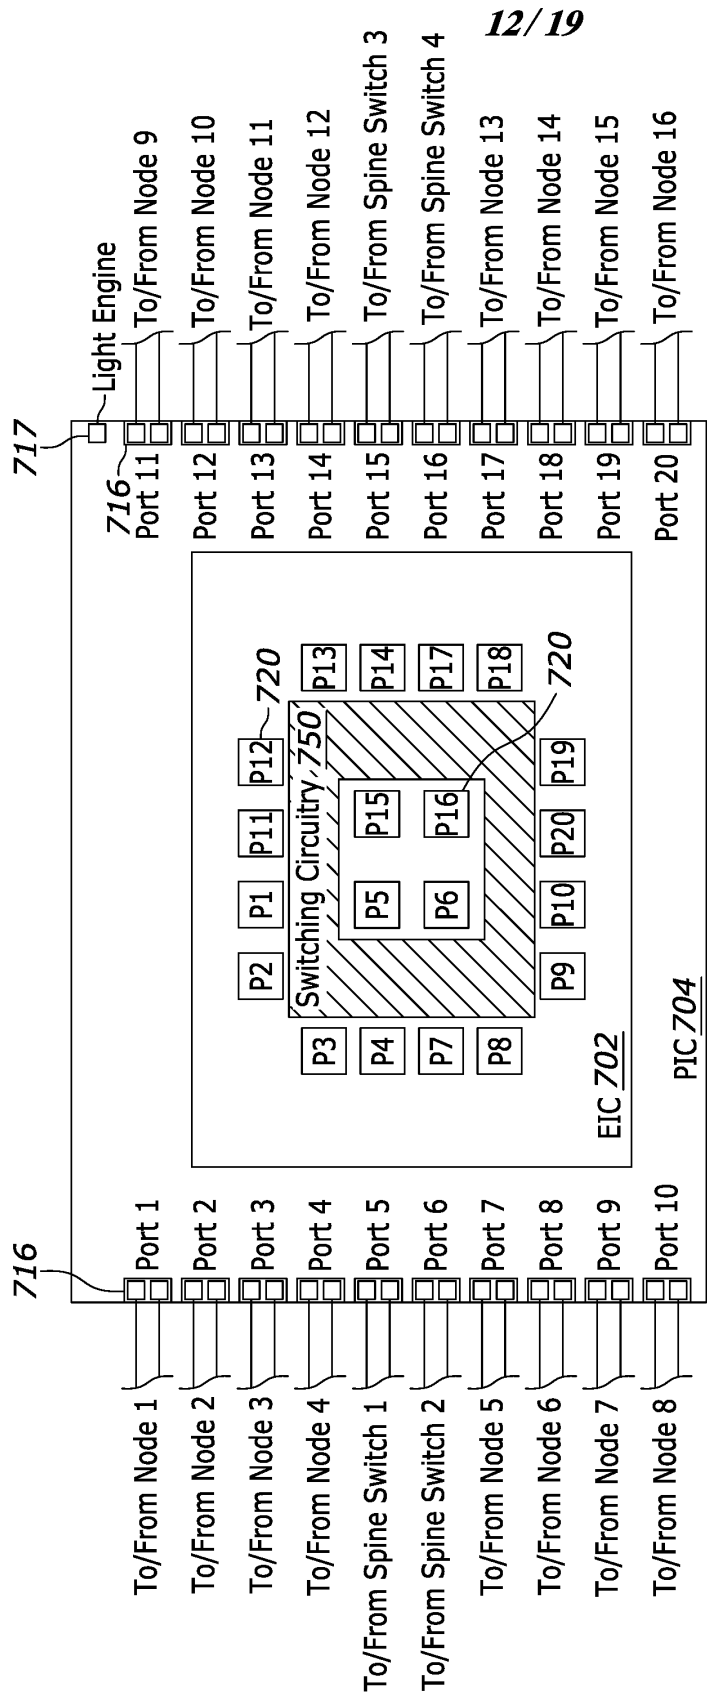


FIG. 7

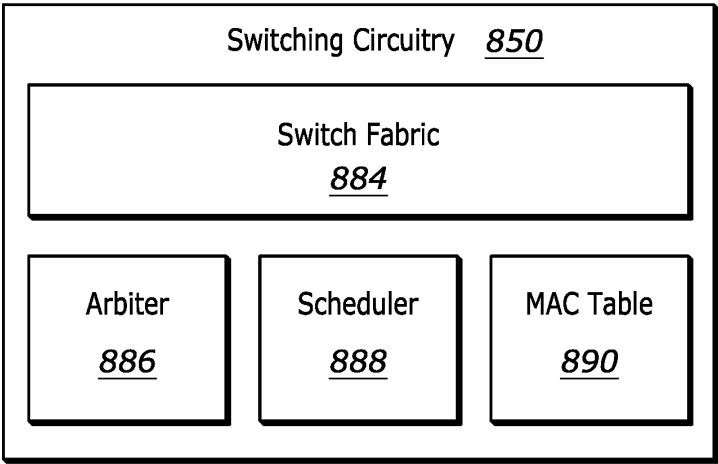


FIG. 8

990 ↘

12-Bit Value	Node ID (E.g., IP Address)	Optical Port ID
xxxx xxxx xxxx	192.168.30.112	P10
xxxx xxxx xxxx	192.168.30.238	P2
xxxx xxxx xxxx	192.168.31.211	P16
xxxx xxxx xxxx	192.168.30.74	P4
⋮	⋮	⋮
xxxx xxxx xxxx	192.168.30.120	P20
xxxx xxxx xxxx	192.168.32.173	P6

FIG. 9

1000A

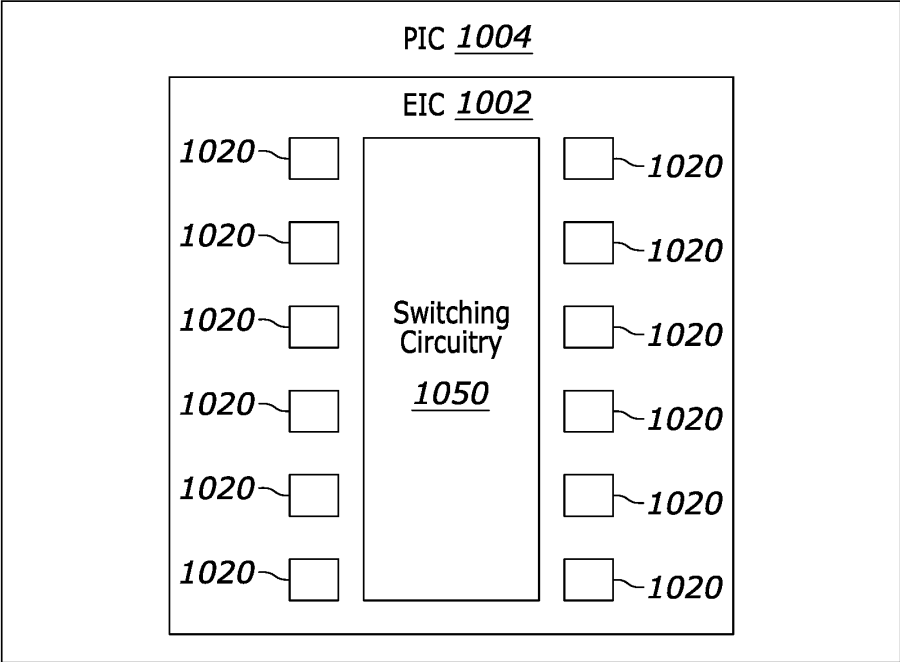


FIG. 10A

1000B

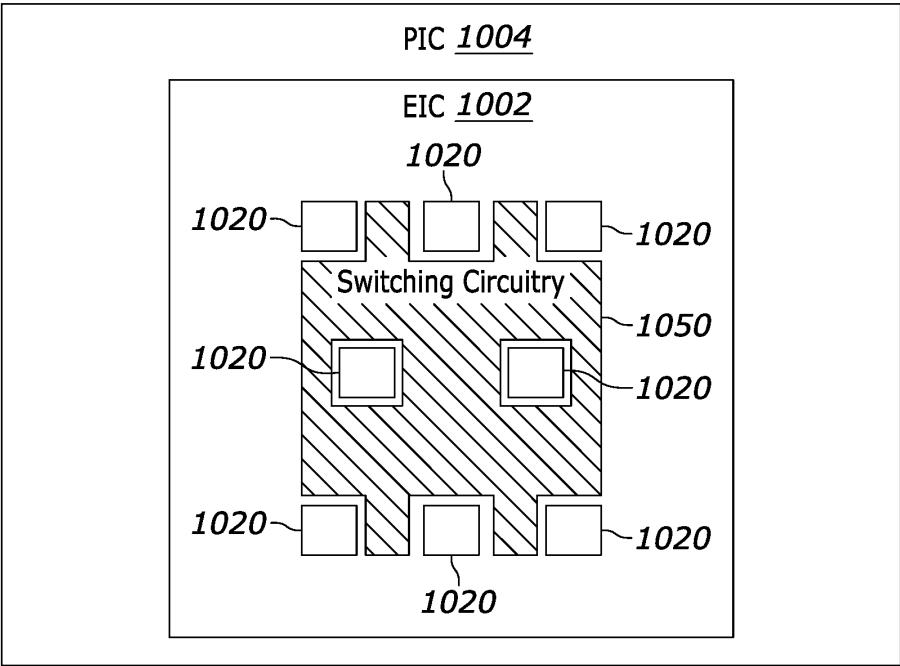


FIG. 10B

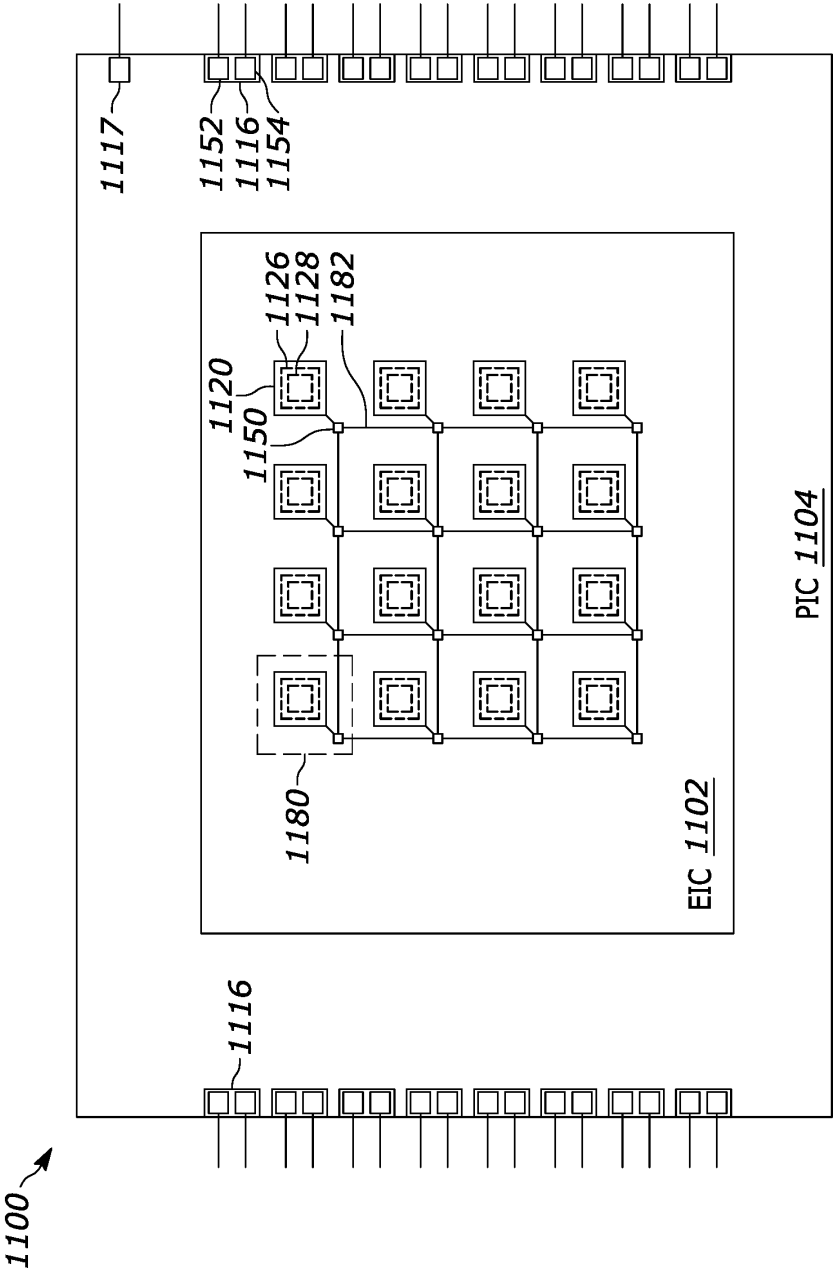


FIG. 11A


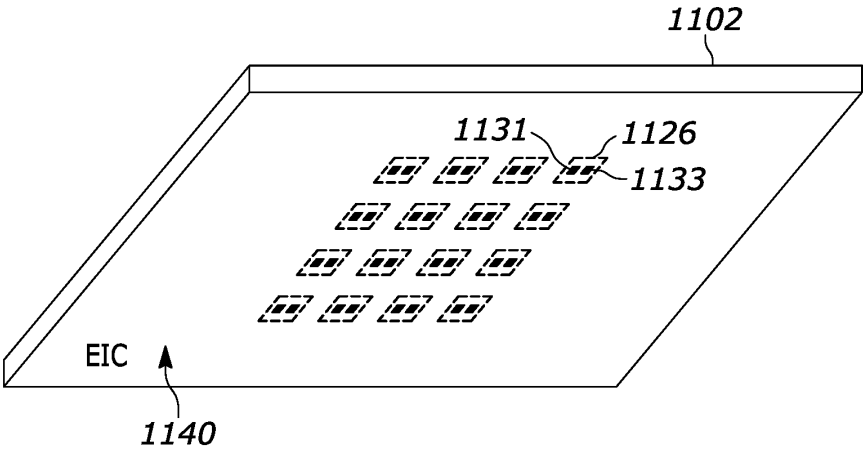


FIG. 11B

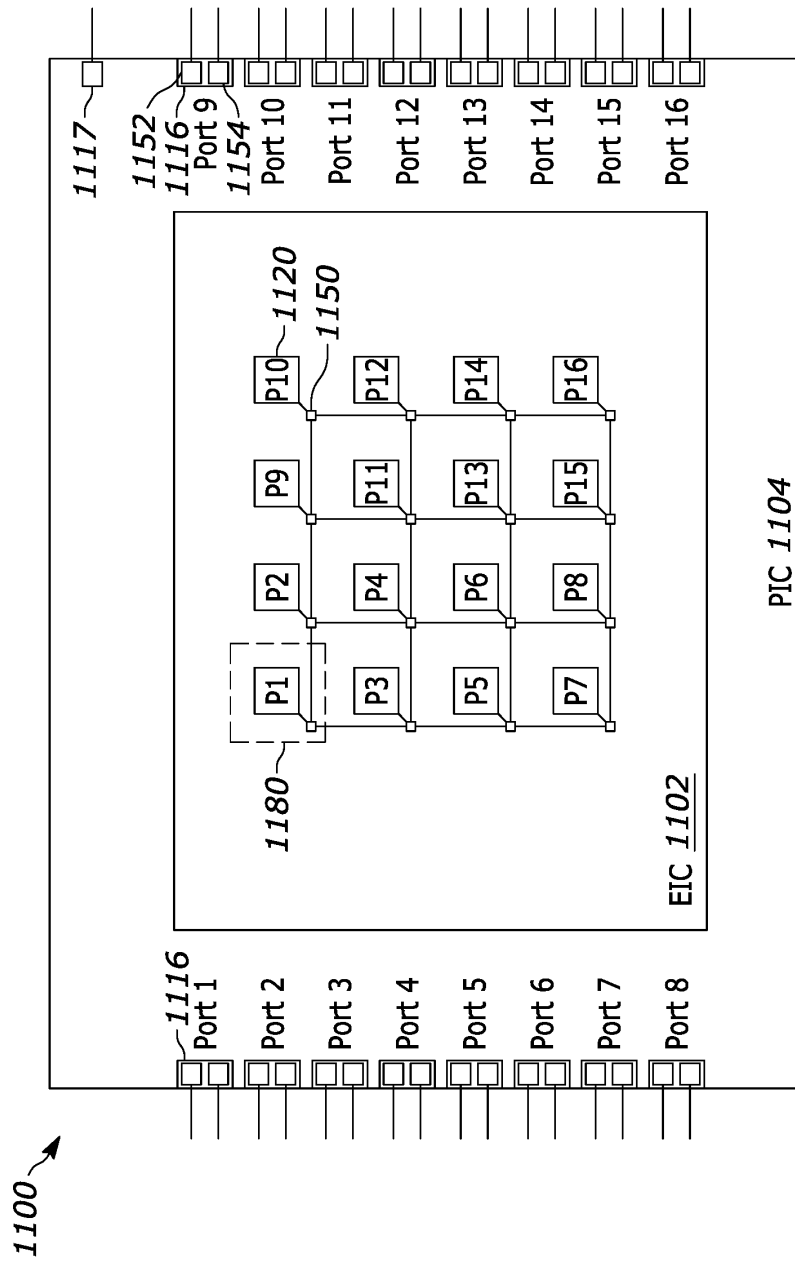

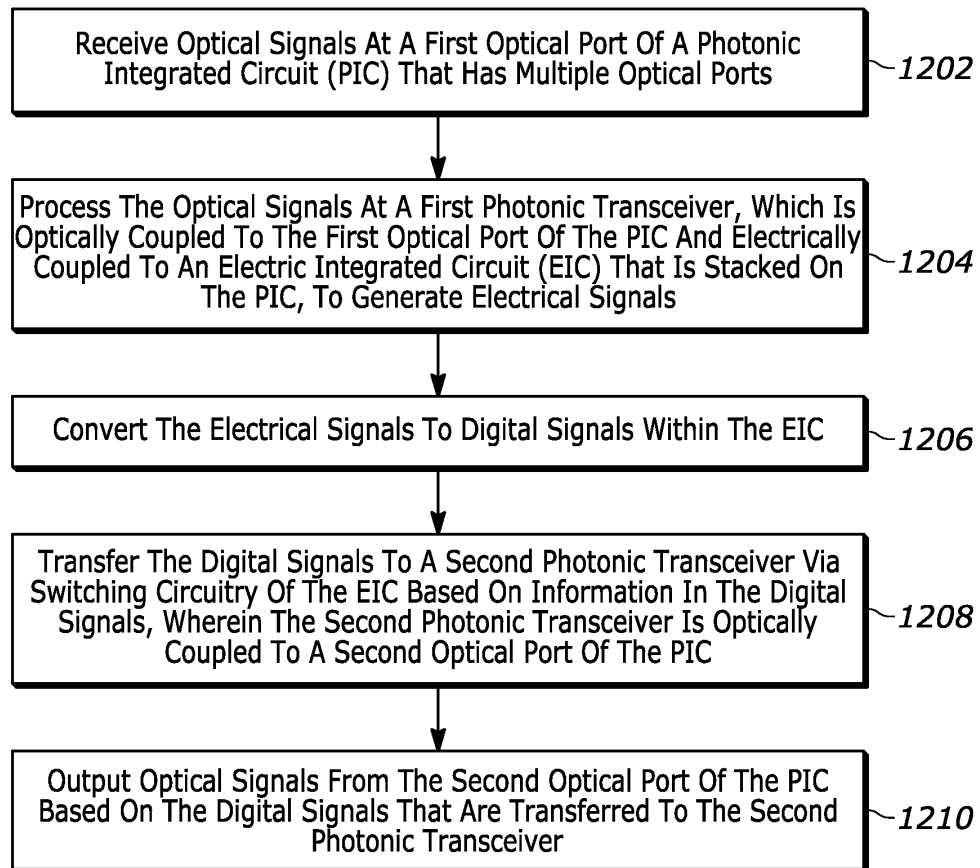
18/19

FIG. 12

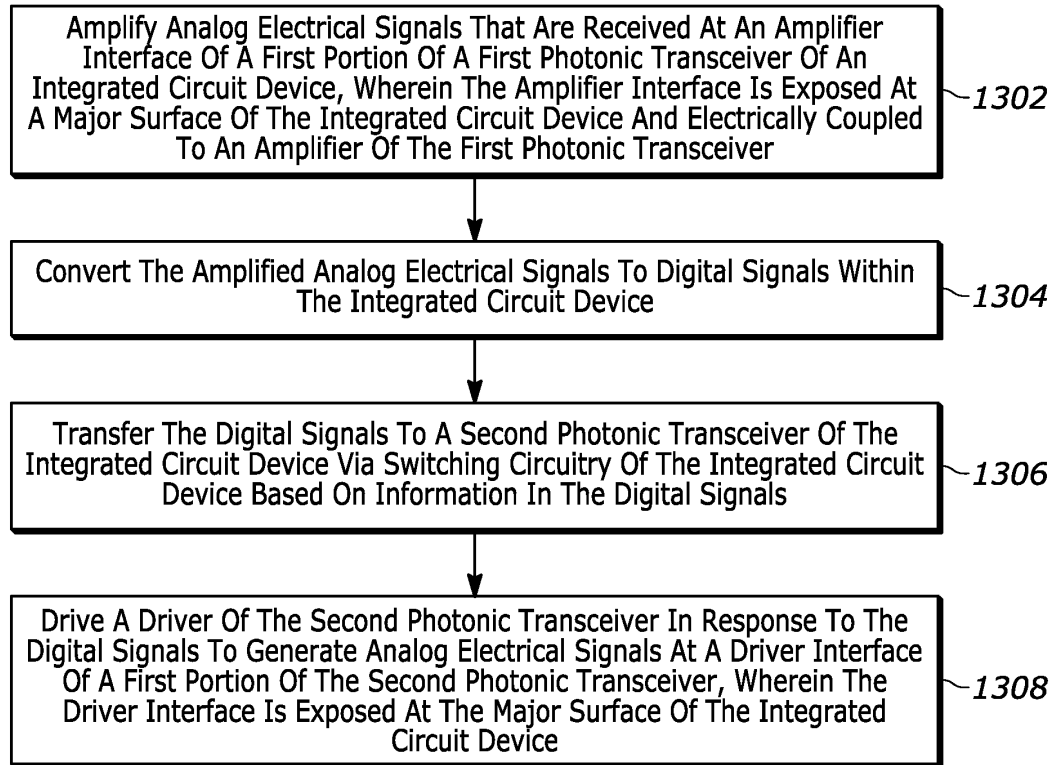
19/19

FIG. 13