



(51) International Patent Classification:

A41D 1/00 (2006.01) A61B 5/0402 (2006.01)
A61B 5/053 (2006.01) G06F 1/16 (2006.01)

(21) International Application Number:

PCT/IL2014/050134

(22) International Filing Date:

7 February 2014 (07.02.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/763,963 13 February 2013 (13.02.2013) US
61/771,874 3 March 2013 (03.03.2013) US

(71) Applicant: **HEALTHWATCH LTD.** [IL/IL]; 34 Hazei-
tim Street, 4630734 Herzliya (IL).

(72) Inventors: **SHOSHANI, Boaz**; 53 Rambam Street,
4360138 Raanana (IL). **AMIR, Uri**; 6 Almog Street,
60405 Or Yehuda (IL).

(74) Agent: **KATZ, Itzhak**; 7 Haim Gilad Street, 4937754
Petach Tikva (IL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: METHOD FOR LIMITING ELASTICITY OF SELECTED REGIONS IN KNITTED FABRICS

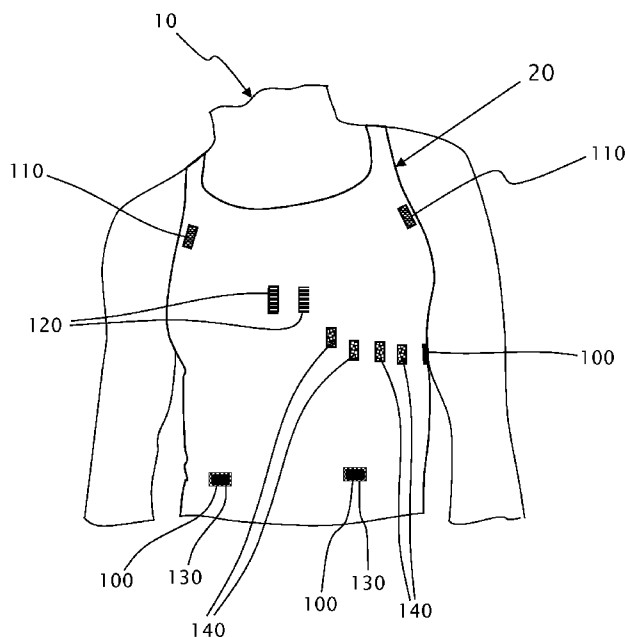


Fig. 1

(57) Abstract: A method for substantially reducing the elasticity of at least one selected textile region of a garment. The method includes producing the garment including a conductive textile electrode and rigidifying the at least one selected textile region. The rigidifying process includes applying rigidifying matter onto or into the at least one selected textile region. The at least one selected textile region is selected from the group consisting of a conductive textile electrode and a region of the garment situated between two adjacent textile electrodes. The invention further provides a garment having a tubular form, knitted by a seamless knitting machine with base-yarns. The garment includes at least one conductive textile electrode, composed of multiple knitted line segments, each knitted with a conductive yarn and a spandex yarn, wherein the spandex yarn and at least one base-yarn are knitted continuously.



— *with amended claims (Art. 19(1))*

Date of publication of the amended claims:
2014

18 September