



- (51) **International Patent Classification:**
H04L 12/28 (2006.01) **H04W 4/50** (2018.01)
H04L 12/24 (2006.01) **H05B 47/19** (2020.01)

(21) **International Application Number:**
PCT/US2019/065895

(22) **International Filing Date:**
12 December 2019 (12.12.2019)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**
16/226,479 19 December 2018 (19.12.2018) US

(71) **Applicant: ENLIGHTED, INC.** [US/US]; 930 Benecia Avenue, Sunnyvale, California 94085 (US).

(72) **Inventors: ROMANO, John**; 8 Maria Drive, Sparta, New Jersey 07871 (US). **PERKINS, David**; 930 Benecia Avenue, Sunnyvale, California 94085 (US). **SEnescu, Reid**; 6 Russell Avenue, Portola Valley, California 94028 (US). **KURASHIGE, Jason**; 521 Colgate Way, San Mateo, California 94402 (US). **OUCHIDA, Wayne**; 5113 Devon Park Court, San Jose, California 95136 (US). **MOHAN, Tanuj**; 121 Concord Circle, Mountain View, California 94040 (US).

(74) **Agent: WATANABE, Hisashi D.**; Siemens Corporation-Intellectual Property Dept., 3501 Quadrangle Blvd. Ste. 230, Orlando, Florida 32817 (US).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

- (54) Title: LIGHTING CONTROL SYSTEM CONFIGURABLE BY CONTROL DEVICE

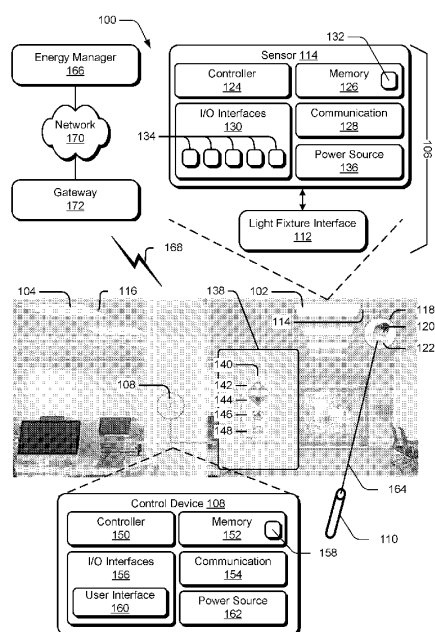


Fig. 1

- (57) Abstract:** There is described a lighting control system (100) of a building environment comprising a control device (108) and a lighting device (106). The control device (108) is capable of detecting an activation of a configuration mode of the lighting control system (100) and controlling illumination for the building environment in response to command inputs received at a user interface (160). The lighting device (106) is capable of receiving a message indicating that the activation of the configuration mode has been detected by the control device (108) and receiving a directional signal from a directional device (110) subsequent to receiving the message. A membership status of the lighting device (106) in a device group is changed in response to receiving the directional signal.

Published:

— *with international search report (Art. 21(3))*