



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38, 7/36, H04B 7/26		A1	(11) International Publication Number: WO 97/47154
			(43) International Publication Date: 11 December 1997 (11.12.97)
(21) International Application Number: PCT/US97/09903 (22) International Filing Date: 6 June 1997 (06.06.97) (30) Priority Data: 660,436 7 June 1996 (07.06.96) US (71) Applicant: QUALCOMM INCORPORATED [US/US]; 6455 Lusk Boulevard, San Diego, CA 92121 (US). (72) Inventor: TIEDEMANN, Edward, G., Jr.; 4350 Bromfield Avenue, San Diego, CA 92121 (US). (74) Agents: MILLER, Russell, B. et al.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: **METHOD AND APPARATUS FOR PERFORMING IDLE HANDOFF IN A MULTIPLE ACCESS COMMUNICATION SYSTEM**

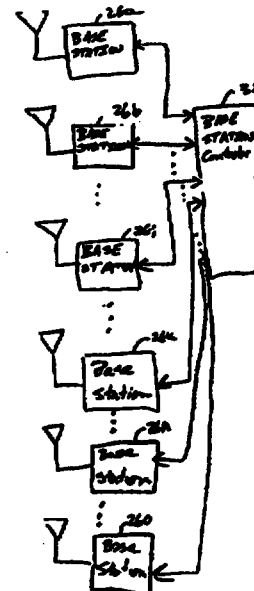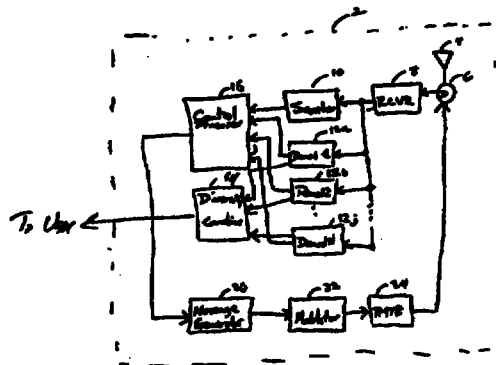

(57) Abstract

A method and apparatus which permits handoffs while the mobile station (2) is in the system access state. This is achieved by providing for channel assignment messages to be sent over the paging channel of a plurality of base stations (26), which increases the probability of one of the messages getting through. In addition, this assures the mobile station (2) will be able to handoff to a different base station (26) and have a traffic channel allocated to it on the new base station (26) without delay. In addition, a method and apparatus which permits the mobile station (2) to be directly assigned into a soft handoff state upon traffic channel assignment.