
301
302
First node
Second node

FIG. 3

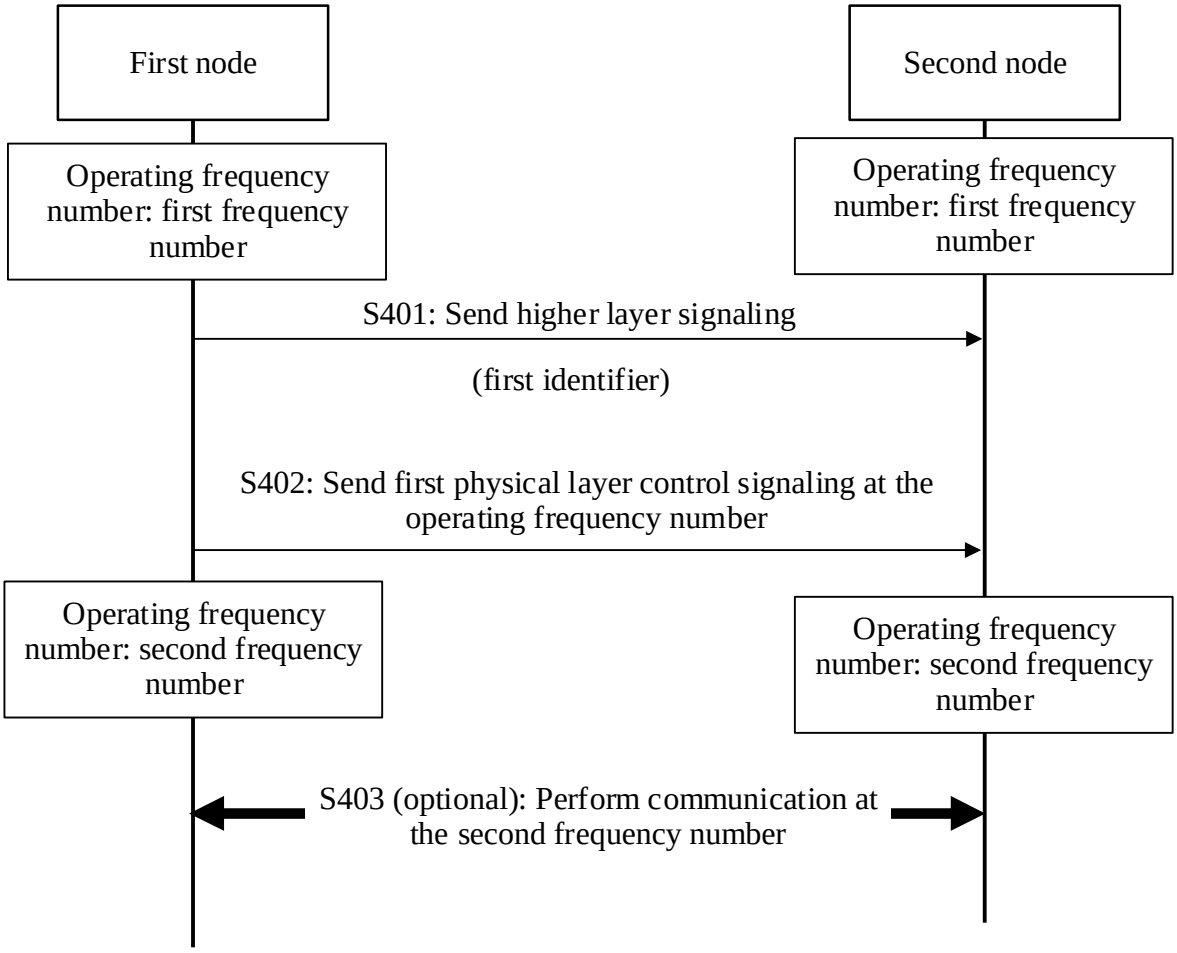

First node
Second node
Operating frequency number: first frequency number
Operating frequency number: first frequency number
S401: Send higher layer signaling
(first identifier)
S402: Send first physical layer control signaling at the operating frequency number
Operating frequency number: second frequency number
Operating frequency number: second frequency number
S403 (optional): Perform communication at the second frequency number

FIG. 4

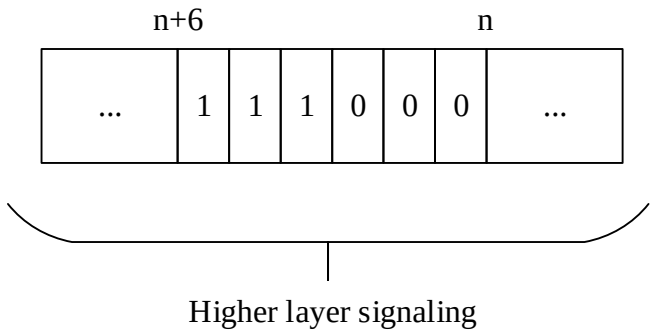

n+6
n
...
1
1
1
0
0
0
...
Higher layer signaling

FIG. 5

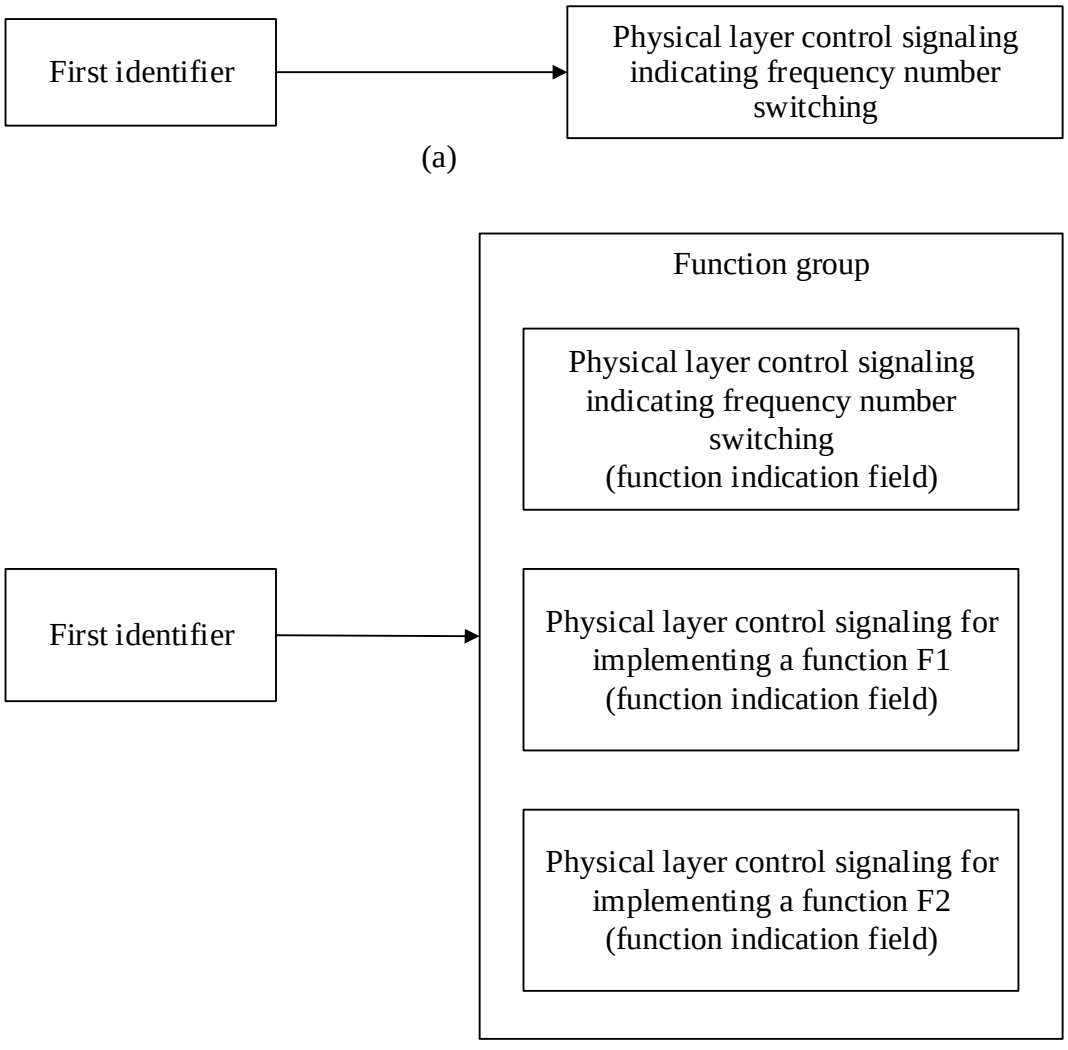

First identifier
Physical layer control signaling indicating frequency number switching
(a)
Function group
Physical layer control signaling indicating frequency number switching
(function indication field)
First identifier
Physical layer control signaling for implementing a function F1
(function indication field)
Physical layer control signaling for implementing a function F2
(function indication field)
(b)

FIG. 6