



RTMP's copy

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁶ : H03K 19/177		A1	(11) International Publication Number: WO 95/28769
			(43) International Publication Date: 26 October 1995 (26.10.95)
(21) International Application Number: PCT/US95/04639		(81) Designated States: AM, AT, AT (Utility model), AU, BB, BG, BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), TJ, TM, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).	
(22) International Filing Date: 14 April 1995 (14.04.95)			
(30) Priority Data: 08/229,923 14 April 1994 (14.04.94) US			
(71) Applicant: BTR, INC. [US/US]; c/o Corporate Trust Co., 1 East 1st Street, Reno, NV 89501 (US).			
(72) Inventor: TING, Benjamin, S.; 21120 Sullivan Way, Saratoga, CA 95070 (US).			
(74) Agents: SOBRINO, Maria, E. et al.; Blakely, Sokoloff, Taylor & Zafman, 7th floor, 12400 Wilshire Boulevard, Los Angeles, CA 90025-1026 (US).			
		Published With international search report.	

SG 9611526-6

(54) Title: ARCHITECTURE AND INTERCONNECT SCHEME FOR PROGRAMMABLE LOGIC CIRCUITS

(57) Abstract

An FPGA is comprised of a number of cells which perform logical functions on input signals. Programmable intraconnections provide connectability between each output of a cell belonging to a logical cluster to at least one input of each of the other cells belonging to that logical cluster. A set of programmable block connectors are used to provide connectability between logical clusters of cells and accessibility to the hierarchical routing network. A uniformly distributed first layer of routing network lines is used to provide connections amongst sets of block connectors. A uniformly distributed second layer of routing network lines is implemented to provide connectability between different first layers of routing network lines. Switching networks are used to provide connectability between the block connectors and routing network lines corresponding to the first layer. Other switching networks provide connectability between the routing network lines

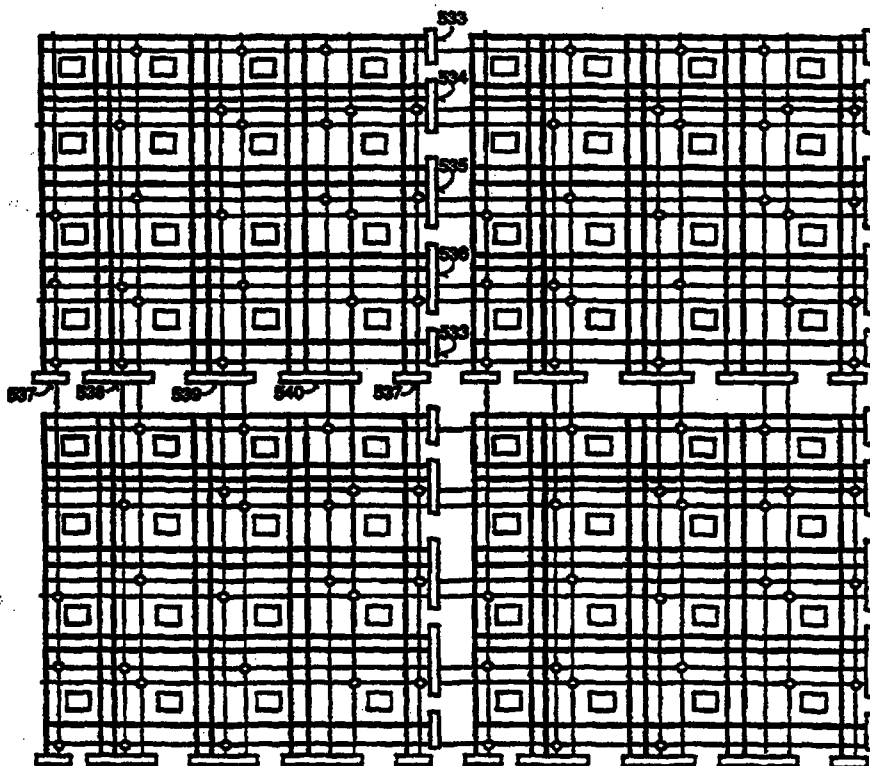

corresponding to the first layer to routing network lines corresponding to the second layer. Additional uniformly distributed layers of routing network lines are implemented to provide connectability between different prior layers of routing network lines.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

96 1 15 26 -6