FIG. 1A

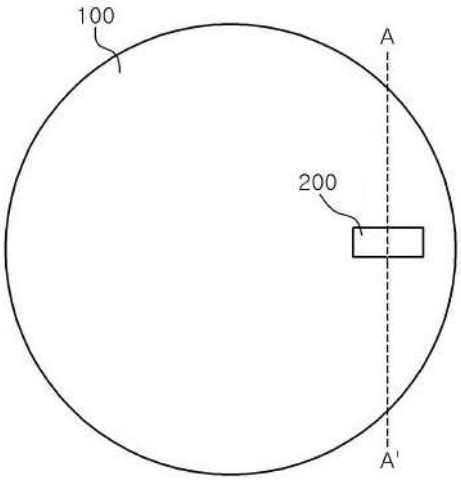


FIG. 1B

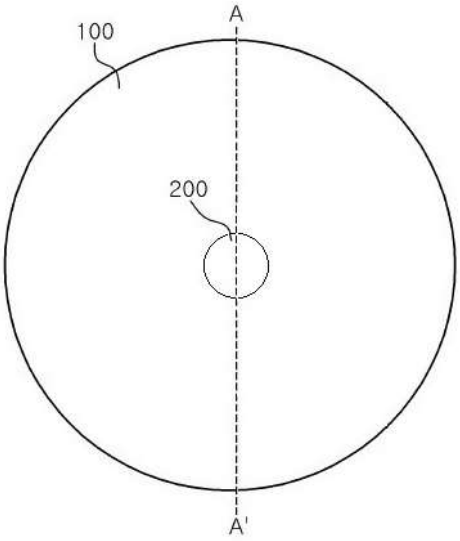


FIG. 2

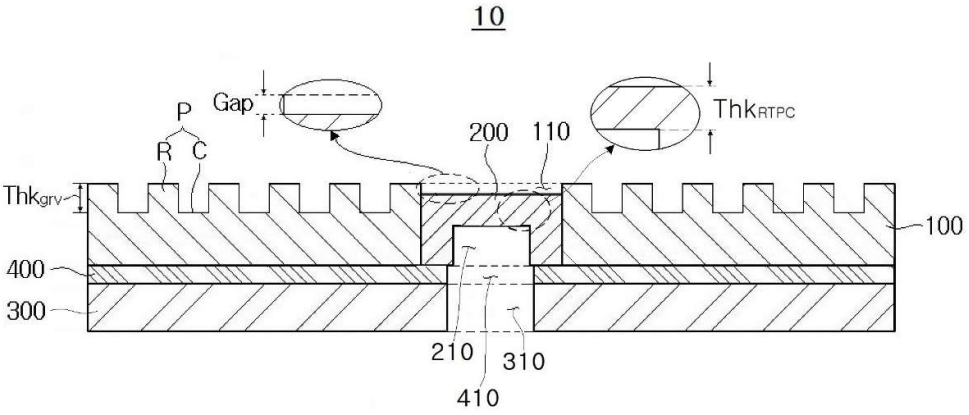


FIG. 3

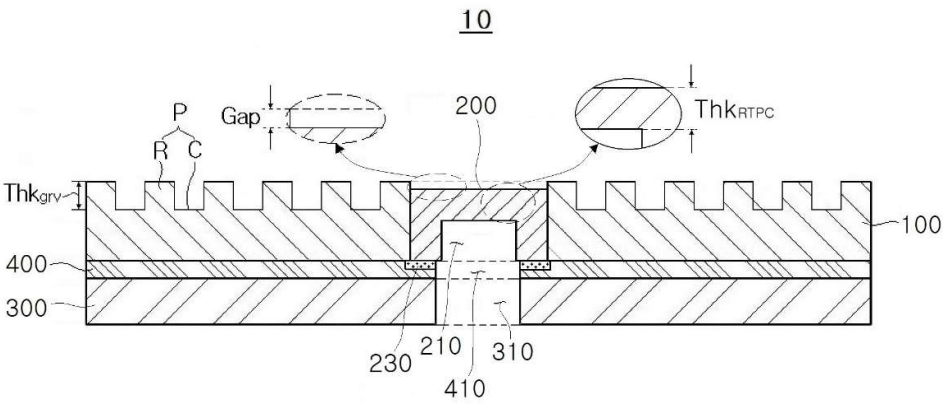


FIG. 4

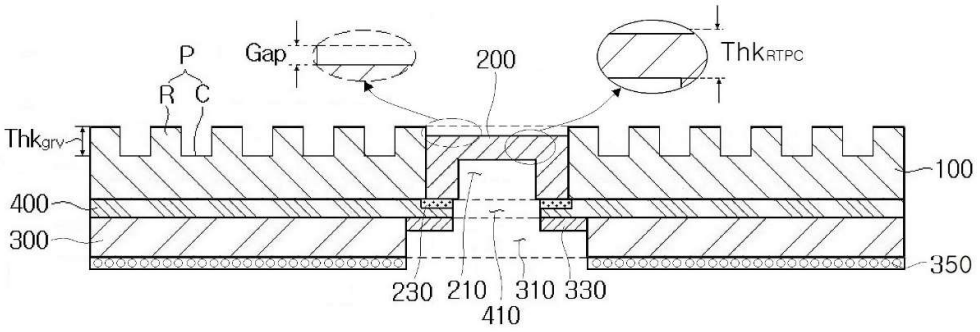

10
P
R
C
Gap
200
Thk_RTPC
Thk_grv
100
400
300
350
230
210
310
330
410

FIG. 5

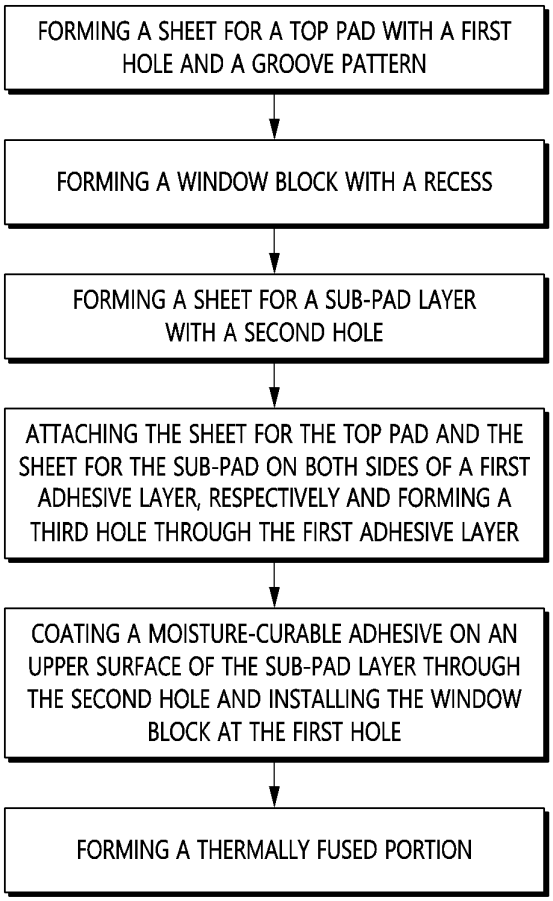

FORMING A SHEET FOR A TOP PAD WITH A FIRST HOLE AND A GROOVE PATTERN
FORMING A WINDOW BLOCK WITH A RECESS
FORMING A SHEET FOR A SUB-PAD LAYER WITH A SECOND HOLE
ATTACHING THE SHEET FOR THE TOP PAD AND THE SHEET FOR THE SUB-PAD ON BOTH SIDES OF A FIRST ADHESIVE LAYER, RESPECTIVELY AND FORMING A THIRD HOLE THROUGH THE FIRST ADHESIVE LAYER
COATING A MOISTURE-CURABLE ADHESIVE ON AN UPPER SURFACE OF THE SUB-PAD LAYER THROUGH THE SECOND HOLE AND INSTALLING THE WINDOW BLOCK AT THE FIRST HOLE
FORMING A THERMALLY FUSED PORTION

FIG. 6A

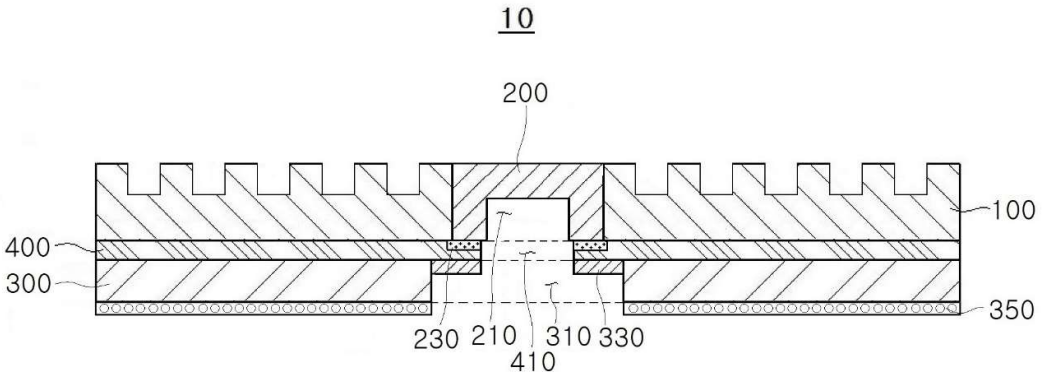

10
200
100
400
300
350
230
210
310
330
410

FIG. 6B

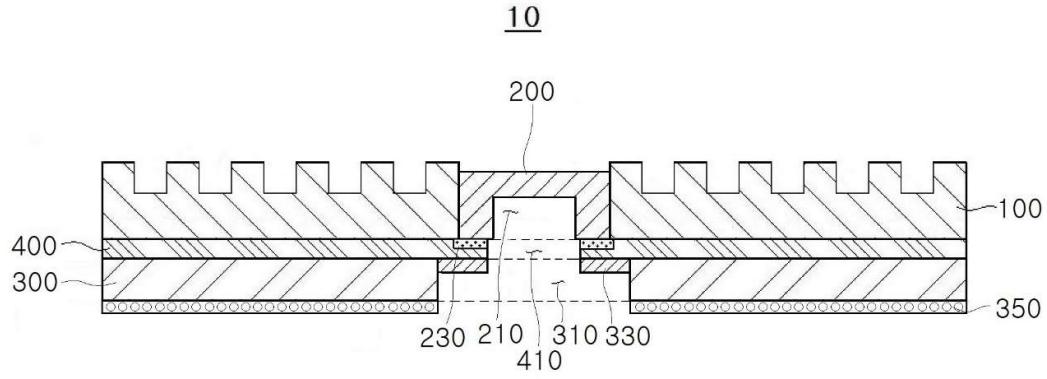

10
200
100
400
300
350
230
210
310
330
410

FIG.7A

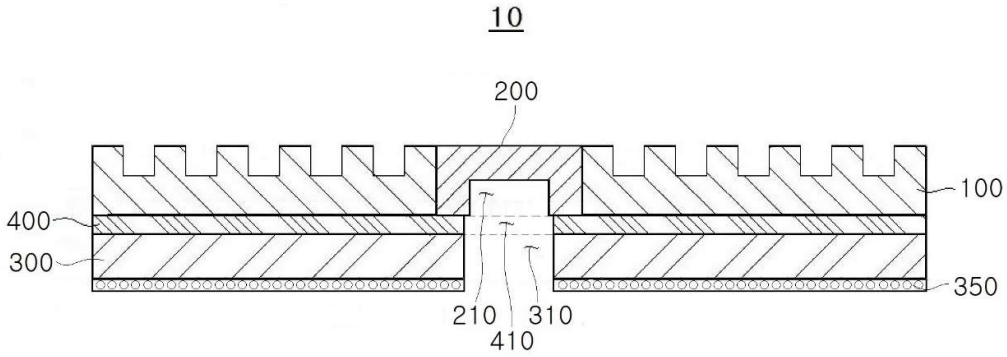

10
200
100
400
300
350
210
310
410

FIG. 7B

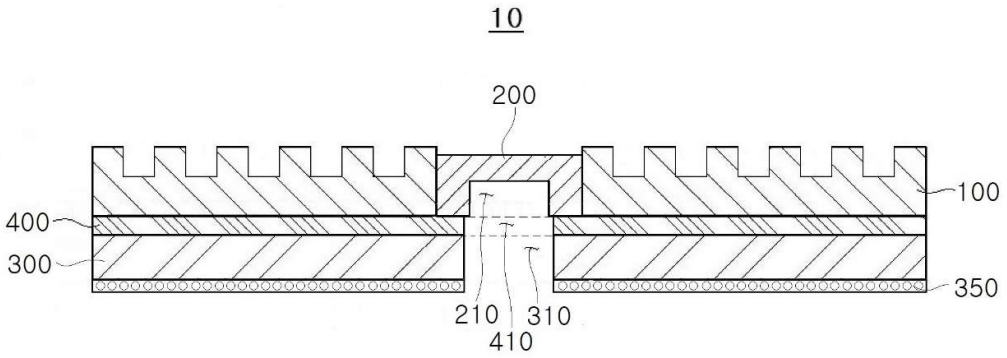

10
200
100
400
300
350
210
310
410

FIG. 8A

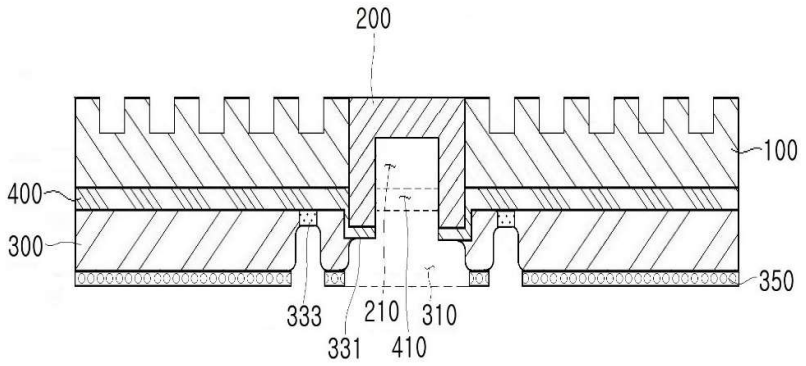
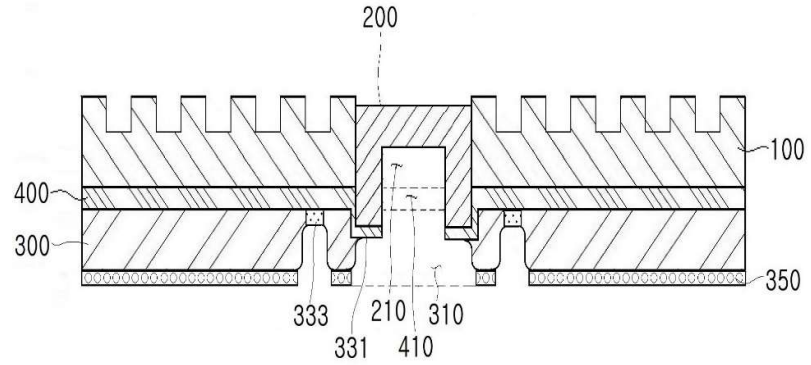

10
200
100
400
300
350
333
210
310
331
410

FIG. 8B


10
200
100
400
300
350
333
210
310
331
410