



(51) International Patent Classification:
E04C 2/24 (2006.01)

(21) International Application Number:
PCT/US2015/011010

(22) International Filing Date:
12 January 2015 (12.01.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
14/153,260 13 January 2014 (13.01.2014) US

(71) Applicant: SAINT-GOBAIN PLACO SAS [FR/FR]; 34
avenue Franklin Roosevelt, F-92150 Suresnes (FR).

(72) Inventor; and

(71) Applicant : BOYDSTON, Jerry D. [US/US]; 124 Siddle
Drive, Cody, Wyoming 82414 (US).

(72) Inventor: WILTZIUS, Bryan J.; 1000 Woodbrook Drive,
Largo, Florida 33770 (US).

(74) Agent: COLITZ III, Michael J.; 401 E. Jackson St., Suite
2700, Tampa, Florida 33602 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: POLYESTER LAMINATED BUILDING BOARDS WITH IMPROVED SURFACE CHARACTERISTICS

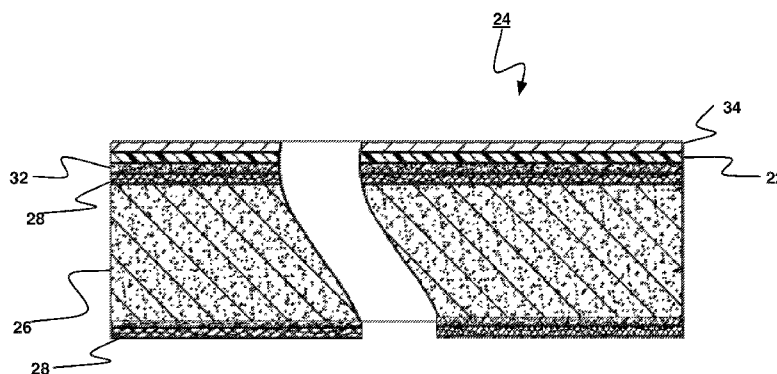


FIGURE1

(57) Abstract: This disclosure relates to using polyester films on building boards to enable improved surface coatings. The polyester film is preferably applied to a glass mat via an adhesive to form a laminate. This laminate is then bonded to the exterior surface of a gypsum board. The polyester film is advantageous because it allows for exterior surface coatings to be applied. In one embodiment, an exterior acrylic coating is applied to the polyester film. Boards constructed in accordance with this disclosure allow for exterior finishings to be achieved without the need for excessive finishing materials or steps.