

TRANSLATION

D E S C R I P T I O N

"FM MULTIPLEXED BROADCAST RADIOWAVE RECEIVING
DEVICE WITH A DETACHABLE STORAGE MEDIUM"

5 Technical Field

 This invention relates to a receiving device that receives the pay display information transmitted from a broadcasting station and displays it. The present invention is most suitable for receivers for FM
10 teletext multiplexed with FM broadcast radiowaves and then transmitted.

Background Art

 There has been a service using the medium of FM broadcast radiowaves, where service information, such
15 as character information, is multiplexed with FM (Frequency Modulation) broadcast radiowaves--audio information--and then transmitted, and the service information is caused to appear on the display means provided on the reception side. This service is known
20 as FM teletext and has been coming in practice as a visual information radio.

 Specifically, the FM broadcasting station on the transmission side transmits the FM broadcast radiowaves with which display information, such s characters and
25 numbers, has been multiplexed. The radiowaves are received on the reception side with an FM radio receiver with a liquid-crystal display, which separates

the display information, such as characters and numbers, from the FM broadcast radiowaves converts the display information into character codes, and displays the characters on the liquid-crystal display unit to enable the user to view, for example, a weather forecast or traffic information on the screen. With the FM teletext, some of the service information is available free of charge and specific kind of the service information may be provided with charge.

When the pay service information is provided for the users in the FM teletext, the company running the FM teletext must collect license fees in a suitable way. If the company tries to collect license fees according to the monthly pay contract with the users, some users are liable to fall behind their payment, making it complex to manage the users. Furthermore, since it is expected that more than one company runs service information providing business, each company practically cannot pinpoint the users of its service and collect license fees.

On the part of users, they have to go to the company or the financial institution to pay their license fees, imposing a burden on them. Furthermore, in the case of FM teletext, it is practically impossible to stop the supply of service information only to the users who has fallen behind their payment, because FM broadcast radiowaves are used.

The object of the present invention is to provide a display information receiving device, a display information transmission/reception system, and a storage medium which enable the users to pay license fees easily and the company to manage the users without complicated procedures when pay display information is transmitted.

Description of the Invention

To accomplish the foregoing object, according to one preferred aspect of the invention, there is provided a display information receiving device comprising: receiving means for receiving the display information transmitted from a display information transmitting station; display means for displaying the display information received by the receiving means; a device body which enables installation and removal of a storage medium that stores the time information indicating time; acquiring means for acquiring the present time; judging means for judging whether or not the present time acquired by the acquiring means has reached at the time indicated by the time information stored in the storage medium installed in the device body; and control means for inhibiting the display of the display information transmitted from the display information transmitting station after the judging means has judged that the present time has reached at the stored time. With this configuration, at the time

of selling a storage medium detachable from the display
information receiving device, it is possible to charge
according to the period while the pay display
information can be checked visually with the display
5 information receiving device.

Furthermore, according to another preferred
aspect, there is provided a display information
transmission/reception system comprising: a display
information transmitting device for transmitting
10 display information and present time information;
a storage medium for storing the time information
indicating time; and a display information receiving
device which enables installation and removal of the
storage medium that receives the display information
15 and present time information transmitted from the
display information transmitting device, wherein the
display information receiving device comprises:
receiving means for receiving the display information
and present time information transmitted from the
20 display information transmitting device; display means
for displaying the display information received by the
receiving means; judging means for judging whether or
not the present time indicated by the present time
information received by the receiving means has reached
25 at the time indicated by the time information stored in
the storage medium; and control means for inhibiting
the display of the display information transmitted from

the display information transmitting device after the judging means has judged that the present time has been reached at the stored time. With this configuration, at the time of selling a storage medium detachable from the display information receiving device, it is possible to charge according to the period while the pay display information transmitted from the display information transmitting device can be received visually with the display information receiving device.

Additionally, according to still another preferred aspect, there is provided a storage medium comprising:

storage means for storing the time information indicating the time for controlling whether the display on a display information receiving device that receives the display information transmitted from a display information transmitting station is allowed or inhibited; and interface means for interfacing with the display information receiving device that enables installation and removal of the medium. With this configuration, at the time of selling a storage medium, it is possible to charge according to the period while the pay display information can be received visually with the display information receiving device that enables installation and removal of the medium.

Brief Description of the Drawings

FIG. 1 is a schematic explanatory diagram of a system configuration of an FM multiplexed teletext

broadcast to which an embodiment of the present invention is applied;

FIG. 2 is a plan view of a service information receiving device according to the embodiment;

5 FIG. 3 is a left-side view of the service information receiving device;

FIG. 4 is a right-side view of the service information receiving device;

10 FIG. 5 is a block diagram of the service information receiving device;

FIG. 6 is a block diagram of an IC card for use with the service information receiving device of the embodiment;

15 FIG. 7 is an explanatory diagram of the configuration of the EEPROM in the IC card;

FIG. 8 shows the contents of the table stored in the ROM in the service information receiving device of the embodiment;

20 FIG. 9 is a block diagram of the service information transmitting device according to the embodiment;

FIG. 10 shows the format of a service information transmission signal;

25 FIG. 11 is a flowchart for part of the processing of the service information receiving device according to the embodiment;

FIG. 12 is a flowchart following FIG. 11;

FIG. 13 is a flowchart following FIG. 11;

FIG. 14 is a flowchart for the program select screen create process;

5 FIG. 15 is a flowchart for the pay program reception setting process;

FIG. 16 is a flowchart for the program selecting process;

FIG. 17 is a flowchart for the pay reception frequency setting process;

10 FIG. 18 shows a representation on the program select screen;

FIG. 19 shows another representation on the program select screen; and

15 FIG. 20 shows a representation during pay program reception setting.

Best Mode of Carrying Out the Invention

Hereinafter, embodiments of the present invention will be explained in detail. FIG. 1 shows the configuration of an FM teletext broadcasting system to which an embodiment of the present invention is applied.

20 The FM teletext broadcasting system comprises an FM broadcasting station 3--an enterprise that transmits FM broadcast radiowaves obtained by multiplexing pay and free pieces of service information, a service information receiving device 1 of the embodiment that receives the FM broadcast

radiowaves transmitted from the FM broadcasting station 3, an IC (Integrated Circuit) card 2--an information storage medium used in receiving pay service information in the service information receiving device 1, and
5 a shop 4, such as a convenience store, that sells IC cards 2. The shop 4 is under a specific card sales contract to a service center 91.

Specifically, the service center 91 is not only an issuing company of the IC cards 2, but also
10 a producing company of pay programs--pay service information. The pay programs produced at the service center 91 are sent as pay service information to the FM broadcasting station 3, which transmits these programs together with the free service information--the free
15 programs produced at the FM broadcasting station 3 and others. The pay service information may be delivered from the service center 91 to the FM broadcasting station 3 by wire, by radio, by magnetic tape, or in other suitable ways.

20 The service information receiving device 1 will be explained with reference to FIGS. 2 to 5.

As shown in FIG. 2, the service information receiving device 1 has a key input section 5 and a display section 6 acting as display means for
25 displaying service information on the surface of its almost rectangular parallelepipedic device body 1A. The key input section 5 is provided with a character

delete key 7, a function select key 8, an alphabet/
numeral select key 9 for selecting alphabets and
numerals, a pictorial symbol key 10, an alphanumeric
key group 11 for entering the alphabetical letters A to
5 Z and the numerals 1 to 0, a tuning key 12 for tuning
the received broadcast radiowaves, a radio/service
information select key 13, an information memory key
14, a pay reception frequency setting key 15, an OK key
16, a cursor key 17 for performing FM multiplex program
10 selection, cursor movement, execution, calculation,
etc., and a mode key group 18 for selecting such modes
as information bank, telephone, calculation, and
secret.

15 Provided on one side of the service information
receiving device 1 are a stereo headphone jack 19,
a volume control dial 20, and a power switch 21 as
shown in FIG. 3. On the other side of the service
information receiving device 1, there is provided
a slot 22 in which the IC card 2, an information
20 storage medium, is installed as shown in FIG. 4

FIG. 5 is a block diagram of the service
information receiving device 1, which comprises an FM
broadcast receiving section 30 that receives FM
broadcast radiowaves and produces the corresponding
25 sound and a service information receiving section 40
that performs various processes associated with the
reception of the pay and free service information

multiplexed into the FM broadcast radiowaves received at the FM broadcast receiving section 30.

5 The broadcast receiving section 30 comprises an antenna 31 for receiving FM broadcast radiowaves, an FM tuner 32 for tuning an FM broadcast radiowave, an FM demodulator 33 for demodulating an FM signal, a stereo demodulator 34 for demodulating the demodulated FM signal into a stereo signal, a pair of amplifiers 35a, 35b for amplifying the output signals of the stereo demodulator 34, and a pair of speakers 10 36a, 36b for outputting the signals amplified at the amplifiers 35a, 35b in the form of sound. FM stereo sounds can, of course, be listened to by plugging a stereo headphone into the stereo headphone jack 19.

15 The service information receiving section 40 contains an L-MSK (Level Controlled Minimum Shift Keying) demodulator 41 that is connected to the FM demodulator 33 and separates the service information multiplexed in the FM broadcast radiowaves by effecting digital modulation to vary the level of the multiplex 20 signal by 4 to 10% with respect to the modulation factor of the L and R signals in the FM stereo broadcasting, an error correction decoder 42, and a control section 43 for performing various processes of the separated service information. 25

Connected to the control section 43 are a ROM (Read Only Memory) 44 that stores the processing

programs for the control section 43, the key input section 5, the display section 6, a card processing section 45 that performs the process of reading the data from and writing the data into the IC card 2, 5 a received data memory 47 that stores the received data (received information), an input data memory 48 that stores the input data (input information) from the key input section 5, an alarm sounding section 49, such as a buzzer, that gives an alarm according to the process result from the control section 43, and a reception 10 control section 55 that performs the reception tuning of the FM tuner 32 according to the operation of the tuning key 12 in the key input section 5 or the pay reception frequency setting process explained later.

15 FIG. 6 is a block diagram of the IC card 2. The IC card 2 comprises a connector 51 for data exchange with the service information receiving device 1 body, an EEPROM (Electrically Erasable Programmable Read Only Memory) 52 for storing the validity period 20 relative value data explained later, and an enciphering exchange CPU (Central Processing Unit) 53.

FIG. 7 shows the memory area structure of the EEPROM 52 in the IC card 2. In the structure, there are provided a validity period relative value data storage 25 area 52a, a use begin date data writing area 52b, a use end date data writing area 52c, an unused flag data storage area 52d, the number-of-allowed-pay-programs

data storage area 52e, the number-of-service-areas
data storage area 52f, a service area data storage
area 52g, the number-of-service-stations data storage
area 52h, a service station data storage area 52i,
5 an effective service type data storage area 52j,
and an issuing company ID data storage area 52k.
The validity period relative value data storage area
52a has stored the validity period relative value data
UD in advance, which is composed of 9-bit data
10 indicating a relative validity period in days in the
range from 1 to 365. For instance, if the validity
period is six months, the data indicating "182" have
been stored previously in the factory before shipment.
If the validity period is 12 months, the data
15 indicating "365" have been stored likewise.

In the use begin date data writing area 52b, the
use begin year data SKYD and the use begin month/day-
of-month data SKDD are written by a process explained
later. The use begin year data SKYD is written in
20 4 bits of data indicating a year in the range from 1994
to 2010. The use begin month/day-of-month data SKDD is
written in 9 bits of data indicating one of 0 to 364
corresponding to the first to the 265th day. Therefore,
for example, if the use begin data is December 31,
25 1994, 4 bits of data indicating "1994" will be written
as SKYD and 9 bits of data indicating "364"
corresponding to December 31 will be written as SKDD.

In the use end date data writing area 52c, the use end year data SSYD and the use end month/day-of-month data SSDD are written by a process explained later. The use end year data SSYD is written in 4 bits of data indicating a year in the range from 1994 to 2010. The use end month/day-of-month data SSDD is written in 9 bits of data indicating one of 0 to 364 corresponding to the first to the 365th day. In addition, in the unused flag data writing area 52d, flag MF = 1 indicating unused has been written previously in the factory before shipment. The flag MF will be rewritten into MF = 0 indicating already in use at the time when the IC card 2 starts to be in use.

In the number-of-allowed-pay-programs data storage area 52e, the number-of-allowed-pay-programs data UBD, the maximum number of select points of pay service information, ("3" in this example) has been written previously in the factory before shipment. The number-of-pay-programs data UBD is any one of "1" to "3" corresponding to the first to the third program.

In the number-of-service-areas data storage area 52f, the number-of-service-areas data SCSD has been stored. The number-of-service-areas data SCSD indicates the number of areas N (N = the number of administrative divisions of Japan) where the issuing company of the IC cards 2 provides pay service, using any one of 1 to 7. N items of service data SD (N) indicated by the SCSD

have been stored in the following individual storage areas 52g, 52h, and 52i. Specifically, each of the N items of SD (N) consists of a service area data item SCD, the number-of-service-stations data item SKSD, and service station data items SKD (1) to SKD (M). The service area data item SCD has a value in the range from 1 to 47 corresponding to the areas (administrative divisions of Japan) where pay service is provided. The number-of-service-stations data item SKSD has a value in the range from a minimum value of 1 to a maximum value of 7 indicating the number of pay service stations (M) run by the issuing company of the IC cards 2. The service station data items SKD consist of data items SKD(1) to SKD(M) corresponding to the M service stations indicated in the number-of-service-stations data SKSD. These SKD (1) to SKD(M) show the station numbers.

In the effective service type data storage area 52j, the effective service type data USD ("2" in this example) indicating the type of users who can access the service information using the IC cards 2 has been stored. The effective service type data USD has a value in the range from 1 to 3: "1" indicates the specific enterprise-oriented service information, "2" the student-oriented service information, and "3" the ordinary businessman-oriented service information. The effective service type data USD, the

number-of-pay-programs data UBD, and the validity
period relative value UD vary with the type and selling
price of the IC card 2. The higher the selling price
of the IC cards 2, the larger values the number-of-
5 allowed-pay-programs data UBD and the validity period
relative value data UD have. In the issuing company
ID data writing area 52k, the value assigned to the
issuing company (the service center 91 also acting as
a supplier of pay programs) of the IC cards 2 in the
10 range from 1 to 512 has been written previously in the
factory before shipment. For example, the information
HK indicting the issuing company in the present
embodiment has been written. The information showing
the issuing company is not limited to numerals, but may
15 be character data.

In the allowed program number data writing area
521, the allowed program number KBD (a value in the
range of 1 to N) is written by a process explained
later. The allowed program number registers KBR1 to
20 KBR3 store the program numbers which the user has
decided to check visually, paying a charge. The KBR4
always stores "0."

In the ROM 44, the table shown in FIG. 8, together
with processing programs, has been stored. The table
25 stores not only the names of areas from Hokkaido to
Okinawa, corresponding to the area numbers 1 to 47, but
also the station numbers of FM stations existing in the

individual areas, the transmitting frequencies, and the names of broadcasting stations, all according to the names of the individual areas.

FIG. 9 is a block diagram of a service information transmitting device 70 provided in the FM broadcasting station 3. The service information transmitting device 70 comprises a transmitting section 71, a multiplex processing section 72, a transmission processing section 73 that transmits the pay and free service information (as explained later) to the multiplex processing section 72, and a clock section 74 that generates the present year/month/day of month data. The transmitting section 71 is composed of a stereo modulator 75 that performs stereo modulation of audio information, an FM modulator 76, a transmitter 77, and a transmitting antenna 78. The multiplex processing section 72 is made up of an encoding section 82, a multiplexing section 79, an error correction adder 80, and an L-MSK modulator 81.

The transmitting signal format for the service information multiplexed into the FM broadcast radiowaves will be described with reference to FIG. 10. The transmitting information in the service information consists of the year/month/day-of-month data HD, the program table data, the content data of program 1 to program N following the table data. A series of these data items is transmitted repeatedly. The program

table data consists of ID (ID = HI) indicating
a program table, a program supplier ID = BI, the total
number of programs BS, and program peculiar data items
about program 1 to program N. Like the issuing company
5 ID, the program supplier ID has a value in the range of
1 to 512. The program peculiar data consists of
a program name BM, a pay broadcast code UH ("0" means
free of charge and "1" means charged), a sample program
available code MB ("0" means that no sample program is
10 transmitted and "1" means that a sample program is
transmitted), a service type code SS for identifying
the service type (a value in the range of 0 to 3), and
an extra charge code KY as a weighting point value for
pay programs (showing an extra rate in the range of 1
15 to 3).

The individual values of the service type code SS
mean the following:

- 0: the information service whose contents are
common to all of the types of information service
20 (e.g., news from abroad and local weather forecast)
- 1: specific enterprise-oriented information
service (e.g., the business world information and the
latest seller information)
- 2: student-oriented information service (e.g.,
25 the introduction of inexpensive restaurants and the
introduction of universities)
- 3: general businessman-oriented information

service (e.g., stock-price information and the introduction of no-frills hotels)

What is shown in the figure is the actual data which undergoes error correction check sum and encryption and thereafter is transmitted. In the case of free programs, the extra charge code KY is KY = 0. In the received data memory 47, there is provided a memory area of the same structure as that of the transmitting signal format shown in FIG. 10. All of the service information shown in the figure is stored in the memory area in the received data memory 47.

Using the flowcharts shown in FIGS. 11 and later, the operation of the service information receiving device 1 will be described. In the flow, the following data items and the registers in the control section 43 are used:

Year/month/day-of-month HD: consists of 4-bit data indicating the year 1994 to the year 2010 and 9-bit data having a value in the range of 0 to 364 corresponding to the first day to the 365th day, like the use end year data SSYD and the use end month/day-of-month SSDD

Present year data register GYR: contains 4 bits and stores the present year in the range from the year 1994 to the year 2010

Present month/day-of-month data register GDR: contains 9 bits and stores the present

month/day-of-month in the range of 0 to 364

corresponding to the first day to the 365th day

(Here, GR indicates both of the registers GYR and GDR)

5 Date computing register HZR: stores the interim data in calculating the use end date.

Expiration register KGR: "0" means within the expiration and "1" means beyond the expiration.

10 Program allowance computing register BZR: stores the interim data in calculating the number of allowed programs.

Counter N: counts the number of areas where pay service is provided.

15 Counter M: counts the number of pay service stations.

Register X: temporarily stores the data indicating pay service stations.

Increment register NR: stores a value specifying one of KBR1 to KBR4.

20 Specifically, as the power is turned on, the control section 43 in the service information receiving device 1 starts operation according to the flowcharts shown in FIGS. 11 to 13, sets the expiration register KGR in response to the turning on of the power supply
25 (SA1), and monitors the reception of the year/month/day-of-month data HD (SA2). When obtaining the year/month/day-of-month data DH from the transmitted

signal in the aforementioned format, the control section stores the year/month/day-of-month data HD in GR. Since GR indicates both of the registers GYR and GDR as described earlier, the 4-bit present year data
5 in the received year/month/day-of-month data HD is stored in the present year data register GYR and the 9-bit present month/day-of-month data in the received year/month/day-of-month data HD is stored in the present month/day-of-month data register GDR (SA3).

10 Then, the control section monitors the reception of HI, the ID indicating the program table (SA4). If receiving HI, it will take in the program table data (SA5) and execute a program select (menu) screen create process explained later (SA6). Thereafter, the control
15 section will take in the program content data (SA7) and execute a program selecting process (SA8) explained later. Then, the control section will senses whether or not the IC card 2 has been installed in the slot 22 (SA9). If it has not been installed, the control
20 section will set a 1 in the register KGR (SA27) and return control to step SA2.

Then, when the IC card 2 has been installed in the slot 22, the control section will read the information HK stored in the issuing company ID data writing area
25 52 in the IC card 2, compare the information HK (any value in the range of 1 to 512) with BI, the program supplier's ID (any value in the range of 1 to 512), and

judge whether or not they are equal (SA10). If the judgment result shows that $BI \neq HK$, the control section will set a 1 in the register KGR (SA27) and return control to step SA2, as when the IC card 2 has not been installed as described earlier. Therefore, when the IC card has not been installed, or when HK indicating the issuing company of the IC card 2 disagrees with BI indicating the supplier of the pay program even if the IC card has been installed (because the program is not the pay program dealt with the issuing company of the IC card 2), the processes at step SA11 and later will not be carried out, with the result that the pay program reception setting process at step SA21 in FIG. 12 will not be executed either.

If $BI = HK$ and HK indicating the issuing company of the IC card 2 coincides with BI indicating the supplier of the pay program, the control section will read the state of the flag MF stored in the unused flag data storage area 52d in the IC card 2 and judge whether or not $MF = 1$ (SA11). If the judgment result shows that $MF = 1$ and the IC card 2 is unused, that day will be the use begin day of the IC card 2. Therefore, the control section will write not only the present year data stored in GYR as the use begin year data SKYD into the use begin date data writing area 52b in the EEPROM 52, but also the present month/day-of-month data stored in GDR as the use begin month/day-of-month data

SKDD into the use begin date data writing area 52b
(step SA12 in FIG. 12).

5 Next, the control section reads the validity
period relative value data UD from the validity period
relative value data storage area 52a in the EEPROM 52,
adds the validity period relative value data UD to the
present month/day-of-month data stored in GDR, and
stores the result in the date computing register HZR
(SA13). Then, it judges whether or not the value of
10 HZR is 364 or less (SA14). If the value of HZR is 364
or less, the use end day can be represented by using
the present year and the present month/day-of-month +
the validity period relative value data, without
carrying up the value of the year.

15 Therefore, in this case, the control section
writes not only the present year data stored in GYR
as the use end year data SSYD into the use end date
data writing area 52c (SA15), but also the present
month/day-of-month + the validity period relative value
20 data stored in HZR as the use end month/day-of-month
data SSDD into the use end date data writing area 52c
(SA16). Thereafter, to indicate that the IC card 2 is
now in use, the control section resets the flag MF
(SA19), and then resets KGR to indicate that the IC
25 card 2 is within the validity period of pay service
information reception (SA20). The control section then
executes a pay program reception setting process

explained later (SA21) and returns control to step SA2.

5 If the judgment result at step SA14 shows that the value of HZR has exceeded 364, the use end day cannot be expressed using the values ranging from 0 to 364 corresponding to the first day to the 365th day, without carrying up the value of the year. Therefore, the control section increments the value of the present year data stored in GYR and writes the incremented value as the use end year data SSYD into the use end date data writing area 52c (SA17). Then, the control section subtracts 364 from the present month/day-of-month + the validity period relative value data stored in the HZR and writes the result as the use end month/day-of-month data SSDD into the use end date data writing area 52c (SA18). Thereafter, the control section carries out the steps SA19 to SA21 and returns control to step SA2.

20 If the judgment result at step SA11 shows that $MF = 0$, this means that the IC card 2 is already in use. When the card is now in use, the control section will compare the use end year data SSYD with the present year data stored in GYR and judges whether or not $SSYD \leq GYR$ (step SA22 in FIG. 13). As a result of the judgment, if $SSYD \leq GYR$ does not hold, it is apparent that the IC card 2 has not expired at that point of time. Therefore, the control section sets a 0 in the expiration register KGR to indicate that the

card is within the expiration (SA26) and returns control to step SA2.

5 If at step SA22, $SSYD \leq GYR$ holds, it is possible that the use end year data coincides with the present year data. Then, the control section judges whether or not $SSYD = GYR$ holds (SA23). As a result of the judgment, if $SSYD = GYR$, the control section will compare the use end month/day-of-month data SSDD with the present month/day-of-month data stored in GDR and judge whether or not $SSDD \leq GDR$ holds (SA24).
10 As a result of the judgment, if $SSDD \leq GDR$ does not hold, this means that the IC card 2 is within the expiration and therefore the control section will set a 0 in the expiration register KGR to indicate that the card is within the expiration (SA26). If at step SA24, 15 $SSDD \leq GDR$, the IC card 2 has expired already and therefore the control section will set a 1 in KGR to indicate that the card has expired (SA25) and return control to step SA2. If at step SA23, it has been 20 judged that $SSYD = GYR$ does not hold, it is apparent that the IC card 2 has expired already at that time. Therefore, the control section sets a 1 in KGR at step SA25 and returns control to step SA2.

25 The program select screen create process (SA6) is carried out according to the flowchart shown in FIG. 14. In the process, table items and frames are drawn (SB1) and then program names BM1 to BMN are

displayed (SB2). By the processes at steps SB1 and SB2, the table items including "Program Name", "Charged", "Sample Program", and "Extra" are displayed together with the frames on the display section 6 as shown in FIG. 18. Then, "O" is drawn in the "Charged" column for the program with pay broadcast code UH = 1 (SB3). At the same time, "O" is drawn in the "Sample Program" column for the program with sample program available code MB = 1.

10 Next, the control section judges whether or not there is any program whose extra charge code KY exceeds 1 (SB5). If KY = 0 or KY = 1, the control section will not execute the process at step SB6 and pass control to step SB7. If KY = 2 or 3, the control section will
15 draw "x" and the value of KY in the "Extra" column for the program (SB6). Therefore, for example, if the received signal has the data shown in FIG. 10, "Program a" to "Program h" will be displayed in the "Program Name" column, "O" be displayed so as to correspond to
20 "Program b" to "Program h" in the "Charged" column, "O" be displayed so as to correspond to "Program c", "Program d", and "Program f" in the "Sample Program" column, and "x2" and "x3" be displayed so as to correspond to "Program d" and "Program f" in the
25 "Extra" column, respectively.

At step SB7 following step SB5 or step SB6, it is judged whether or not the expiration register KGR meets

KGR = 1. Since the KGR is set during initialization at step SA1 in FIG. 11, KGR = 1 holds at the start-up. Therefore, the "Charged" column for the program with pay broadcast code UH = 1 is crosshatched (SB8) and the
5 "Program Name" column for the program with UH = 1 and sample program available code MB = 0 is also crosshatched (SB9). By the processes at steps SB8 and SB9, the "Program Name" column for "Program b", "Program e", "Program g", and "Program h" and the "Charged" column
10 for "Program b" to "Program h" are crosshatched as shown in FIG. 18. Namely, the crosshatching of the "Program Name" column indicates that they are pay programs without a sample program, and the crosshatching of the "Charged" column indicates that
15 they are pay programs that cannot be displayed.

If $KGR \neq 1$, or if the IC card 2 is within the validity period, control will proceed from step SB9 to step SB10, where the use end year/month/day-of-month will be displayed on the basis of the use end year data
20 SSYD and the use end month/day-of-month data SSDD stored in the use end date data writing area 52c of the IC card 2. Thereafter, at step SB11, the "Charged" column for the program with pay broadcast code UH = 1 will be crosshatched and the "Program Name" column for
25 the program with UH = 1 and sample program available code MB = 0 will be crosshatched (SB12). Next, the crosshatching of "Charged" column for the program with

UH = 1 and service type code SS = 0 will be canceled (SB13). This means that the program with UH = 1 and SS = 0 allows pay visual check as long as it is within the validity period, regardless of the pay program reception setting process explained later. Of the programs from which the crosshatch of the "Charged" column has been removed at step SB13, the "Sample Program" column with sample program available code MB = 1 will be crosshatched (SB14) and the crosshatch of the "Program Name" column with sample program available code MB = 0 will be removed (SB15). This means that pay visual check is possible.

Next, after "1" is set in NR (SB16), the crosshatch of the "Charged" column for the value of KBR indicated by NR is removed (SB17). Here, the allowed program number data writing area 521 is composed of allowed program number registers KBR1 to KBR4. In each of KBR1 to KBR3, a program number (any one of 2, 4, and 8) for which pay visual check has been determined in a process explained later is stored, starting at KBR1. In KBR4, "0" is always stored.

First, at step SB16, "1" is set in NR (NR = 1). At step SB17, the crosshatch of the "Charged" column for the program number corresponding to the value of KBR1 is removed, meaning that the program with the program number has been selected for pay visual check. Next, it is judged whether or not the sample program

available code MB of the program with the value of KBR1 meets MB = 1 (SB18). If MB = 1 holds and a sample program is present, the "Sample Program" column corresponding to the program is crosshatched (SB19).

5 Because the program has been selected for pay visual check, this means that visual check of a sample program is unnecessary. If at SB18, MB = 0 holds and a sample program is absent, the crosshatch of the "Program Name" column corresponding to the program is removed (SB20).
10 After step SB19 or SB20, NR is incremented (SB21) and then it is judged whether or not the value of KBR indicated by the incremented NR is "0" (SB22). If it is not "0", control returns to step S17. If it is "0", the program select screen create process will be
15 terminated.

Therefore, for example, when all of KBR1 to KBR3 have stored program numbers, the loop of SB16 to SB21 is repeated three times. When NR = 4 is reached, control will proceed to a stop process because KBR4 is
20 always "0". Furthermore, for example, when "BM2 = Program b" and "BM4 = Program d" (BM4 = Program d means that a sample program is present) have been selected previously, the loop is repeated twice, with the result that the "Charged" column of "Program c",
25 "Program f" to "Program h" and the "Program Name" column of "Program g" and "Program h" remain cross-hatched, and the "Sample Program" column of "Program d"

is crosshatched. Specifically, the crosshatching of the "Charged" column indicates the pay program that is not selected or cannot be selected. The crosshatching of the "Sample Program" column indicates that the pay program has been selected and pay visual check of a sample program cannot be allowed. At this time, the use end year/month/day-of-month is also displayed.

The pay program reception setting process (SA21) is carried out according to the flowchart of FIG. 15. After the table items and frames have been drawn (SC1), the program names of BM1 to BMN are displayed (SC2). Furthermore, the "Program Name" column and "Setting" column for pay broadcast code UH = 0 (free) are crosshatched (SC3) and the "Program Name" and "Setting" columns for UH = 1 (charged) and service type code SS $\neq$ effective service type data USD are crosshatched (SC4). By the processes at steps SC1 to SC4, the table items and frames for "Program Name", "Setting", and "Extra" are displayed on the display section 6 as shown in FIG. 20. In addition, "Program a" to "Program h" are displayed in the "Program Name" column, and the "Program Name" column and "Setting" column for "Program a", "Program c", and "Program e" to "Program g" that are free programs and pay programs not can be selected, are crosshatched. This brings into a crosshatch-free state "Program b", "Program d", and "Program h" that are pay programs with SS = 2 can

be selected, making it easy to identify them.

Next, the value (any one of 1 to 3) of the number-of-allowed-pay-programs data UBD is stored in the program allowance computing register BZR (SC5) and "1" is set in NR as the initial value (SC6). Then, it is judged whether or not the extra charge code KY for each program $KY > 1$ holds (SC7). If all of the programs meet $KY \leq 1$, the process at step SC8 will not be performed and control will go to step SC9. If there is a program or programs with $KY > 1$, "x" and the value of KY is written in the "Extra" column for the program (SC8). Therefore, in the embodiment where "Program d" and "Program f" meet $KY > 1$, "x2" is displayed in the "Extra" column for "Program d" and "x3" in the "Extra" column for "Program f" as shown in FIG. 20.

At step SC9 following step SC7 or step SC8, it is judged whether or not one of SW1 to SW9 is pressed. Here, SW1 to SW9 are the keys corresponding to "1" to "9" in the alphanumeric key group 11, with the alphabet/numeral select key 9 in the numeral select position. If any one of these SW1 to SW9 has been pressed, it is judged whether or not the pressed SW number is equal to or smaller than the total number of programs BS (in the embodiment, $BS = 8$). If it is not equal to or smaller than BS, it is judged whether or not it is service type code $SS = USD$ for the program number equal to the SW number (SC11). If $SS \neq USD$

holds and it is a program that cannot be selectively set, control will return to step SC9. If SS = USD holds and it is a program that can be selectively set, the value of the extra charge code KY of the program number will be subtracted from the present value of the program allowance computing register BZR and the value of BZR will be updated (SC12).

Then, it is judged whether or not the program allowance computing register $BZR \geq 0$ (SC13).
If $BZR \geq 0$ holds, control will go to step SC15. If the condition of $BZR \geq 0$ is not fulfilled, this means that the pay programs that exceeds the number-of-allowed-pay-programs data UBD set in BZR at step SC5 has been selected and therefore visual check of the selected pay programs cannot be allowed. Therefore, in that case, the extra charge code KY for the program number is added to the present value in the program allowance computing register BZR to return the value in the BZR to the value before the process at step SC12 (SC14), and the processing is started at step SC9 again.

If $BZR \geq 0$, this means that pay programs have been selected in the range indicated by the number-of-allowed-pay-programs UBD, so that "O" will be drawn in the "Setting" column for the program (SC15). Then, after the SW number (program number) has been stored in the KBR shown by NR (SC16), NR is incremented (SC17) and the loop of step SC9 to step SC18 is repeated until

BZR = 0 is reached (SC18). At the time when BZR = 0 is reached, the pay program reception setting process will be terminated. Therefore, if the number-of-allowed-pay-programs data UBD is "3" and the effective service type data USD is "2" and the SW2 and SW4 are pressed in that order, "O" will be displayed in the "Setting" column for "Program b" and "Program d" by the process at step SC15 as shown in FIG. 20. Then, the process at step SC16 will give KBR1 = 2 and KBR2 = 4, allow
5 KBR3 = 0 and KBR4 = 0 to remain unchanged, and give
10 BZR = 3 - 1 - 2 = 0. Thereafter, the pay program reception setting process will be terminated.

At this time, as shown in FIG. 20, the value of the "Number of Settable Programs" is displayed. The value of the "Number of Settable Programs" decreases
15 from 3 to 2 and to 0 in this example, indicating the number of programs that can be set. While visually checking the number of settable programs, the user can perform the setting operation.

20 The program selecting process (SA9) is performed according to the flowchart of FIG. 16. First, it is judged whether or not any one of the SW1 to SW9 has been pressed (SD1). If any one of the SW1 to SW9 have been pressed, it will be judged whether or not the
25 pressed SW number is equal to or less than the total number of programs BS (SD2). If it is equal or less than BS, it will be judged whether the pay broadcast

code UH for the same program number as the SW number is
"0" (SD3). If it is UH = 0 and free, the actual
program content data of the program will be subjected
to a display process immediately (SD4). By the process
5 at step SD4, the actual program contents of the free
program (in this example, "Program a") stored in the
memory area in the received data memory 47 is read out
and displayed on the display section 6.

If the judgment result at step SD3 shows that the
10 pay broadcast code is UH = 1 and a pay program, it will
be judged whether or not the expiration register KGR
has a 1, or whether the IC card 2 has expired or not
installed in the slot 22 (SD5). If KGR = 0 and the IC
card is within the validity period, it will be judged
15 whether or not the service type code SS for the same
program number as the SW number is "0" (SD6). If the
service type code is SS = 0 and a pay program whose
contents are common to all types of information
services, the actual program content data of the
20 program will be subjected to the display process (SD9).
If the service type code SS is not SS = 0, "1" will be
set in NR (SD7). Next, it will be judged whether or
not the value of KBR indicated by NR is equal to the
number of the pressed SW (SD8). If they are the same,
25 the actual program content data of the program will be
subjected to the display process (SD9). If they are
not equal to each other, NR will be incremented (SD10)

and it will be judged whether or not the value of KBR indicated by NR is "0" (SD11). If it is not "0", control will return to step SD8. If it is "0", control will proceed to step SD12.

5 Specifically, in the pay program reception setting process of FIG. 15, when the same SW as the SW pressed in the selecting operation is pressed, the value of KBR indicated by NR never fails to be equal to the pressed SW number in step SD8. In the example of the pay
10 program reception setting process of FIG. 15, SW2 and SW4 are pressed in that order, and the process at step SC16 gives KBR1 = 2 and KBR2 = 4 and sets KBR3 = 0 and KBR4 = 0. Therefore, during the program selecting
15 process, when SW2 is pressed, KBR1 indicated by NR = 1 has a value of 2 at the time when NR = 1, allowing the number of SW2 to be equal to "2", at step SD8 the value of KBR1. Then, at step SD9, the program contents of
"Program b" with program number "2" is displayed on the display section 6.

20 Furthermore, during the program selecting process, when SW4 is pressed, KBR2 indicated by NR = 2 has a value of 4 at the time when NR = 2, allowing the number of SW4 to be equal to "4", the value of KBR2 at
25 step SD8. Then, at step SD9, the program contents of "Program d" with program number "4" is displayed on the display section 6. Thus, by operating the SW with the same number as that during the pay program reception

setting process, the contents of the pay program for which visual check has been determined can be checked visually.

5 In the example, because $KBR3 = 0$ and $KBR4 = 0$ have been set as described earlier, when $KBR3$ indicated by $NR = 3$ is $KBR3 = 0$ at the time when $NR = 3$, control will go from step SD11 to SD12. Even if a certain program number is stored in $KBR3$, however, because "0" is always stored in $KBR4$, control will proceed from
10 step SD11 to SD12 at the time when $NR = 4$.

Then, when with the service type code $SS \neq 0$, a SW whose number is different from that during the pay program reception setting process, and when with $KGR = 1$, the IC card 2 has expired or not been
15 installed in the slot 22, it will be judged at step SD12 following step SD5 or SD11 whether or not the sample program available code $MB = 1$ (SD12). If the sample program available code is $MB = 0$ and there is no sample program, the program selecting process will be
20 terminated. If the sample program available code is $MB = 1$ and a sample program is present, the sample program content data for the program will be displayed (SD13).

Therefore, by operating the SW whose number is
25 different from that during the pay program reception setting process, if another program that has not been selected has a sample program, the sample program can

be checked visually. If the IC card 2 has expired or not been installed, the operation of a SW whose number is equal or less than the total number of programs BS enables a sample program, if any, to be checked
5 visually as required. After having checked the sample program visually, when the user judges that it is necessary to receive the contents of the actual program visually, he or she will possibly buy a new IC card 2, leading to more frequent purchase of IC cards 2.

10 After the power supply SW21 has been turned on, the control section 43 operates according to the flowchart of FIG. 17 and monitors the operation of a pay reception frequency setting SW15 (SE1). Then, the control section remains in the wait state until
15 the pay reception frequency setting SW15 is operated. If the pay reception frequency setting SW15 is operated to visually check the pay programs provided by the issuing company of IC cards 2, control will proceed to step SE2, where it will be judged whether or not an IC
20 card 2 has been installed in the slot 22. If an IC card 2 has not been installed, the pay reception frequency setting process will be terminated. If an IC card 2 has been installed, the value indicated by the number-of-service-areas data SCSD stored in the number-
25 of-service-areas data storage area f in the IC card 2 is stored in counter N (SE3), and "N (the value of counter N), "●" are displayed on the LCD (display

section 6) (SE4). Then, the place name in the body ROM
44 corresponding to the value of SCD in SD(N) indicated
by the value of the counter N is displayed at the
position of ●. Specifically, as the service area data
5 SCD, SD(N) contains the values ranging from 1 to 47
corresponding to the administrative divisions of Japan.
On the other hand, the ROM 44 in the system body
contains the area names corresponding to the area
numbers ranging from 1 to 47 as explained in FIG. 8.
10 Then, the area name with the area number corresponding
to SCD is read from the ROM 44 and displayed next to
the value of N.

Next, the line feed process is performed (SE6) and
the counter N is decremented (SE7). The loop of step
15 SE4 to SE7 is repeated until counter N = 0 is reached.
Therefore, the loop is repeated N times until N = 0 is
reached. For example, when N = 7, a serial number and
an area name are displayed in each line as follows:

"7, Aomori"
20 "6, Tokyo"
.
.
"1, Yamanashi"

Then, at step SE9 following step SE8, the value of
25 SCSD is set in counter N again. Next, it is judged
whether or not any one of the numeral SWs (1 to N) in
the range indicated by the value of the counter N has

been pressed, or whether or not any one of the numeric keys 1 to N ($N = 1, 2, \dots, 0$) shown in FIG. 2 has been pressed (SE10). If any one of numeric keys 1 to N has been pressed, the number of the pressed key is set in counter N (SE11), and the value of the number-of-stations data SKSD is set in counter M (SE12). Next, after "M (the value of counter M), "●" has been displayed on the LCD (display section 6) (SE13), the SD(N) indicated by the value of the Mth SKD (M) in SD(N) indicated by the value of counter N is stored in register X (SE14). Furthermore, the name of the broadcasting station in the body ROM 44 corresponding to the value of the register X is displayed at the position of ● (SE15).

As described earlier, the SD(N) to SD(1)--the data groups for the individual areas--contain data SKD(1) to SKD(M) indicating the pay service stations in the individual areas. On the basis of the number sensed at step SE10, any one of the areas corresponding to SD(N) to SD(1) has been selected already. In the selected area, there are more than one service station corresponding to data SKD(1) to SKD(M). On the other hand, in the ROM 44 in the system body, a station number, a transmission frequency, and a broadcasting station name are stored for each area name as shown in FIG. 8. Then, in the already selected area, the broadcasting station name with the station number

corresponding to the value of SKD(M) is read from the ROM 44, and is displayed next to the value of M.

Next, the line feed process is performed (SE16) and the counter M is decremented (SE17). The loop of step SE13 to SE18 is repeated until counter M = 0 is reached. Therefore, the loop is repeated M times until M = 0 is reached. If in the example, numeral SW "7" is pressed and M = 5 holds, a serial number and a name of pay service station existing in the previously selected area (Aomori) will be displayed in each line as follows.

"5, K station"

.

.

"2, Z station"

"1, X station"

Then, at step SE19 following step SE18, the value of SKSD is set in counter M again. Next, it is judged whether or not any one of the numeric SWs (1 to M) in the range indicated by the value of the counter M has been pressed, or whether or not any one of the numeric keys 1 to N (N = 1, 2, ..0) shown in FIG. 2 has been pressed (SE20). If any one of the numeric keys has been pressed, the number of the pressed key is set in counter M (SE21), and the transmission frequency of the broadcasting station in the body ROM 44 corresponding to the value of SKD(M) indicated by counter M is set in

a tuner (SE22). Specifically, SKD(M) indicates the station number of the pay service station further selected from the pay service stations existing in the previously selected area. As explained in FIG. 8, because the transmission frequency is stored so as to correspond to the station number for each area, the transmission frequency corresponding to the station number is set in the FM tuner 32. Therefore, in the example, if numeric SW "2" is pressed, ZMHZ of the station corresponding to station number 3 in "Aomori" will be set in FM tuner 32.

In the embodiment, the transmission frequency of a pay program can be set by storing in an IC card the data indicating pay service stations and storing in the body ROM the transmission frequencies corresponding to the data indicating the pay service stations. The transmission frequencies for the pay programs may be stored in an IC card without storing the transmission frequencies in the body ROM. The broadcasting stations that are broadcasting the pay programs provided by the IC card issuing company may be searched automatically for a receivable one. When only one broadcasting station is broadcasting the pay programs supplied from the issuing company of IC cards 2, the number of transmission frequencies is naturally one, so that the transmission frequency may, of course, be set in the FM tuner immediately after the pay reception frequency

setting SW 15 has been pressed.

While in the embodiment, it is judged from the received year/month/day-of-month data whether or not the IC card has expired, for example, a clock circuit
5 may be provided on the receiving device side, the time data in the clock circuit be corrected by the received data, and on the basis of the time data in the clock circuit, it may be judged whether or not the IC card have expired.

10 Furthermore, while in the embodiment, an IC card is used as an information storage medium, the invention is not limited to this. For example, other mediums, such as coin-shaped IC chips, stamp-shaped IC chips, or bar-code-printed cards, may be used. Additionally, for
15 example, information storage means may be provided on the receiving device body, not on the information storage medium that can be installed and removed on and from the receiving device body and the information related to the reception of the pay service information
20 may be written in the information storage means by wire, by radio, or a ROM writer. Still furthermore, the present invention can be applied not only to FM multiplex broadcasting systems, but also to paging systems using radio communication, and various
25 communication and broadcasting by wire or by radio.

While in the described embodiments, the display at the pay information is inhibited when the present time

has reached at the stored time, it is also possible to inhibit the receipt of the pay information.



CLAIMS

1. A display information receiving device comprising:

receiving means for receiving the display
5 information transmitted from a display information
transmitting station;

display means for displaying the display
information received by said receiving means;

10 a device body which enables installation and
removal of a storage medium that stores the time
information indicating time;

acquiring means for acquiring the present time;

judging means for judging whether or not the
present time acquired by said acquiring means has
15 reached at the time indicated by the time information
stored in the storage medium installed in said device
body; and

control means for inhibiting the display of the
display information transmitted from said display
20 information transmitting station after said judging
means has judged that the present time has reached at
the stored time.

2. A display information receiving device
according to claim 1, wherein said display information
25 is multiplexed with FM broadcast radiowaves and then
transmitted, and said receiving means contains means
for receiving the FM broadcast radiowaves and decoding





said multiplexed display information.

3. A display information receiving device according to claim 1, wherein said display information is pay display information;

5 said receiving means further contains means for receiving free display information; and

 said display means further contains means for displaying the free display information received by said receiving means.

10 4. A display information receiving device according to claim 1, wherein said receiving means further receives the present time information and contains

15 time count means for counting the present time, and

 correction means for correcting the present time counted by said time count means on the basis of the present time information received by said receiving means; and

20 said acquiring means acquires the present time counted by said time count means.

25 5. A display information receiving device according to claim 1, wherein said receiving means further contains means for receiving the present time information; and

 said acquiring means acquires the present time from the present time information received by said



receiving means.

6. A display information receiving device according to claim 1, wherein said storage medium has stored period information and contains

5 computing means for computing said time stored in said storage medium on the basis of the present time acquired by said acquiring means and the period information stored in said storage medium, and

 writing means for writing the time computed by
10 said computing means into said storage medium as time information.

7. A display information receiving device comprising:

 receiving means for receiving pieces of display
15 information transmitted from a display information transmitting station;

 display means for displaying pieces of display information received by said receiving means;

 a device body which enables installation and
20 removal of a storage medium that stores number of points representing an amount of the display information;

 select means for selecting at least one of the pieces of display information in the range that does
25 not exceed the number of points stored in the storage medium installed in said device body;

 setting means for setting the information related





to the piece of display information selected by said select means; and

control means for permitting the display of the display information related to the information set by said setting means.

8. A display information receiving device according to claim 7, wherein said display information is multiplexed with FM broadcast radiowaves and then transmitted, and said receiving means contains means for receiving the FM broadcast radiowaves and decoding said multiplexed display information.

9. A display information receiving device according to claim 7, wherein said storage medium further stores the time information indicating time and contains

acquiring means for acquiring the present time, and

judging means for judging whether or not the present time acquired by said acquiring means has reached at the time indicated by the time information stored in said storage medium; and

said control means further contains means for inhibiting the display of the display information related the information set by said setting means and transmitted from the display information transmitting station after said judging means has judged that the present time has reached at the stored time.



10. A display information receiving device
according to claim 7, wherein said display information
is pay display information;

5 said receiving means further contains means for
receiving free display information; and

 said display means further contains means for
displaying the free display information received by
said receiving means.

10 11. A display information receiving device
according to claim 7, wherein said storage medium
further stores the type information indicating the type
of said display information; and

15 said select means can select at least one of the
pieces of display information from the pieces of
display information corresponding to said type
information stored in said storage medium.

20 12. A display information receiving device
according to claim 7, wherein said select means can
select at least one of the pieces of display
information, as long as the total of the weighting
points corresponding to the amount of said display
information does not exceed said number of points.

 13. A display information receiving device
comprising:

25 receiving means for receiving a plurality of types
of display information multiplexed with FM broadcast
radiowaves and then transmitted from a display





information transmitting station;

display means for displaying the display
information received by said receiving means;

5 a device body which enables installation and
removal of a storage medium that stores the type
information indicating the type of said display
information; and

control means for permitting the display of said
display information corresponding to the type
10 information stored in the storage medium installed in
said device body.

14. A display information receiving device
according to claim 13, wherein said storage medium
further stores the time information indicating time and
15 contains

acquiring means for acquiring the present time,
and

judging means for judging whether or not the
present time acquired by said acquiring means has
20 reached at the time indicated by the time information
stored in said storage medium; and

said control means further contains means for
inhibiting the display of the display information
corresponding to the type information stored in said
25 storage medium and transmitted from the display
information transmitting station after said judging
means has judged that the present time has reached at



the stored time.

15. A display information receiving device according to claim 13, wherein said display information is pay display information;

5 said receiving means further contains means for receiving free display information multiplexed with FM broadcast radiowaves and then transmitted; and

 said display means further contains means for displaying the free display information received by
10 said receiving means.

16. A display information receiving device according to claim 13, wherein each piece of said display information corresponding to the type of information stored in said storage medium further
15 contains a plurality of kinds of display information.

17. A display information receiving device comprising:

 receiving means for receiving the display information and information indicating the information
20 of said display information transmitted from a display information transmitting station;

 display means for displaying the display information received by said receiving means;

 a device body which enables installation and
25 removal of a storage medium that stores the information indicating the informant who gives said display information;

This Sheet Has Been Replaced





means for comparing the information indicating
said informant stored in the storage medium installed
in said device body with the information indicating the
informant of said display information received by said
5 receiving means; and

control means for inhibiting the display of said
display information when the comparison at said
comparing means has shown that the information
indicating said stored informant disagrees with the
10 information indicating said received informant.

18. A display information receiving device
according to claim 17, wherein said display information
is multiplexed with FM broadcast radiowaves and then
transmitted, and said receiving means contains means
15 for receiving the FM broadcast radiowaves and decoding
said multiplexed display information.

19. A display information receiving device
according to claim 17, wherein said storage medium
further stores the time information indicating time and
20 contains

acquiring means for acquiring the present time,
and

judging means for judging whether or not the
present time acquired by said acquiring means has
25 reached at the time indicated by the time information
stored in said storage medium; and

said control means further contains means for





inhibiting the display of said display information transmitted from the display information transmitting station after said judging means has judged that the present time has reached at the stored time.

5 20. A display information receiving device according to claim 17, wherein said display information is pay display information;

 said receiving means further contains means for receiving free display information; and

10 said display means further contains means for displaying the free display information received by said receiving means.

 21. A display information receiving device comprising:

15 receiving means for receiving the display information transmitted from a display information transmitting station;

 display means for displaying the display information received by said receiving means;

20 a device body which enables installation and removal of a storage medium that stores data related to a reception frequency for receiving said display information; and

 control means for controlling the reception frequency on the basis of the data related to said reception frequency stored in the storage medium installed in said device body.

25



22. A display information receiving device according to claim 21, wherein said display information is multiplexed with FM broadcast radiowaves and then transmitted, and said receiving means contains means
5 for receiving the FM broadcast radiowaves and decoding said multiplexed display information.

23. A display information receiving device according to claim 21, wherein said storage medium further stores the time information indicating time and
10 contains

acquiring means for acquiring the present time and
judging means for judging whether or not the
present time acquired by said acquiring means has
reached at the time indicated by the time information
15 stored in said storage medium; and

said control means further contains means for
inhibiting the display of said display information
transmitted from the display information transmitting
station after said judging means has judged that the
20 present time has reached at the stored time.

24. A display information receiving device according to claim 21, wherein said display information is pay display information;

said receiving means further contains means for
25 receiving free display information; and

said display means further contains means for
displaying the free display information received by



said receiving means.

25. A display information receiving device according to claim 21, wherein said storage medium stores a plurality of pieces of data related to said reception frequency and contains select means for
5 selecting the desired one from the plurality of pieces of data related to said reception frequency stored in said storage medium; and

said control means controls the reception
10 frequency on the basis of the data selected by said select means.

26. A display information transmission/reception system comprising:

a display information transmitting device for
15 transmitting display information and present time information;

a storage medium for storing the time information indicating time; and

a display information receiving device which
20 enables installation and removal of said storage medium that receives the display information and present time information transmitted from said display information transmitting device, wherein

said display information receiving device
25 comprises:

receiving means for receiving the display information and present time information transmitted





from said display information transmitting device;

display means for displaying the display
information received by said receiving means;

judging means for judging whether or not the
5 present time indicated by the present time information
received by said receiving means has reached at the
time indicated by the time information stored in said
storage medium; and

control means for inhibiting the display of the
10 display information transmitted from said display
information transmitting device after said judging
means has judged that the present time has reached at
the stored time.

27. A display information transmission/reception
15 system according to claim 26, wherein said display
information is pay display information;

said display information transmitting device
further transmits free display information;

said receiving means further contains means for
20 receiving free display information; and

said display means further contains means for
displaying the free display information received by
said receiving means.

28. A display information transmission/reception
25 system according to claim 26, wherein said display
information transmitting device multiplexes said
display information and present time information with



FM broadcast radiowaves and then transmits them; and

said receiving means receives the display information and present time information, both multiplexed with FM broadcast radiowaves and transmitted from said display information transmitting device.

29. A storage medium detachable from a display information receiving device that receives the display information transmitted from a display information transmitting station, comprising:

storage means for storing the time information indicating the time for controlling whether the display on said display information receiving device is allowed or inhibited; and

interface means for interfacing with said display information receiving device.

30. A storage medium detachable from a display information receiving device that receives the display information transmitted from a display information transmitting station, comprising:

storage means for storing the number of points representing an amount of display information for controlling whether the display on said display information receiving device is allowed or inhibited; and

interface means for interfacing with said display information receiving device.

This Sheet Has Been Replaced





31. A storage medium detachable from a display
information receiving device that receives the display
information multiplexed with FM broadcast radiowaves
and transmitted from a display information transmitting
station, comprising:

storage means for storing the type information
indicating the type of the display information for
controlling whether the display on said display
information receiving device is allowed or inhibited;
and

interface means for interfacing with said display
information receiving device.

32. A storage medium detachable from a display
information receiving device that receives the display
information transmitted from a display information
transmitting station, comprising:

storage means for storing the information
indicating an informant of the display information for
controlling whether the display on said display
information receiving device is allowed or inhibited;
and

interface means for interfacing with said display
information receiving device.

33. A storage medium detachable from a display
information receiving device that receives the display
information transmitted from a display information
transmitting station, comprising:

This Sheet Has Been Replaced





storage means for storing the data related to the reception frequency for receiving the display information transmitted from said display information transmitting station; and

5 interface means for interfacing with said display information receiving device.

34. A storage medium according to claim 33, wherein said storage means stores a plurality of pieces of data related to said reception frequency.

A B S T R A C T

5 A service information receiving device 1 receives
the pay service information and year/month/day-of-month
data, both multiplexed with FM broadcast radiowaves and
transmitted from an FM broadcasting station 3, wherein
the device 1 compares the use end date data stored in
an information storage medium 2 detachable from the
device with the year/month/day-of-month data received
by the device 1, and the device permits the display of
10 the pay service information during the period in which
these two sets of data disagree with each other, and
after they have coincided with each other, inhibits the
display of the pay service information.

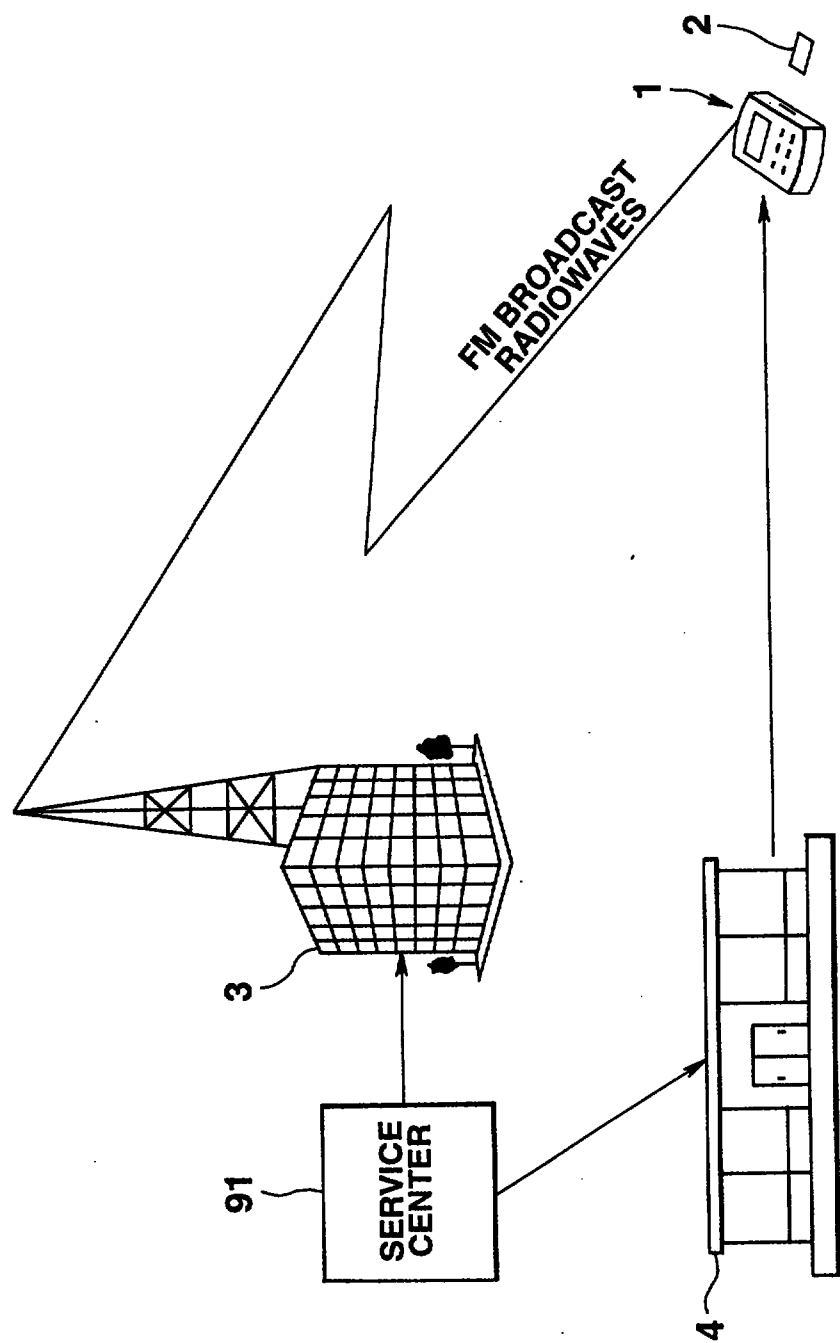


FIG.1

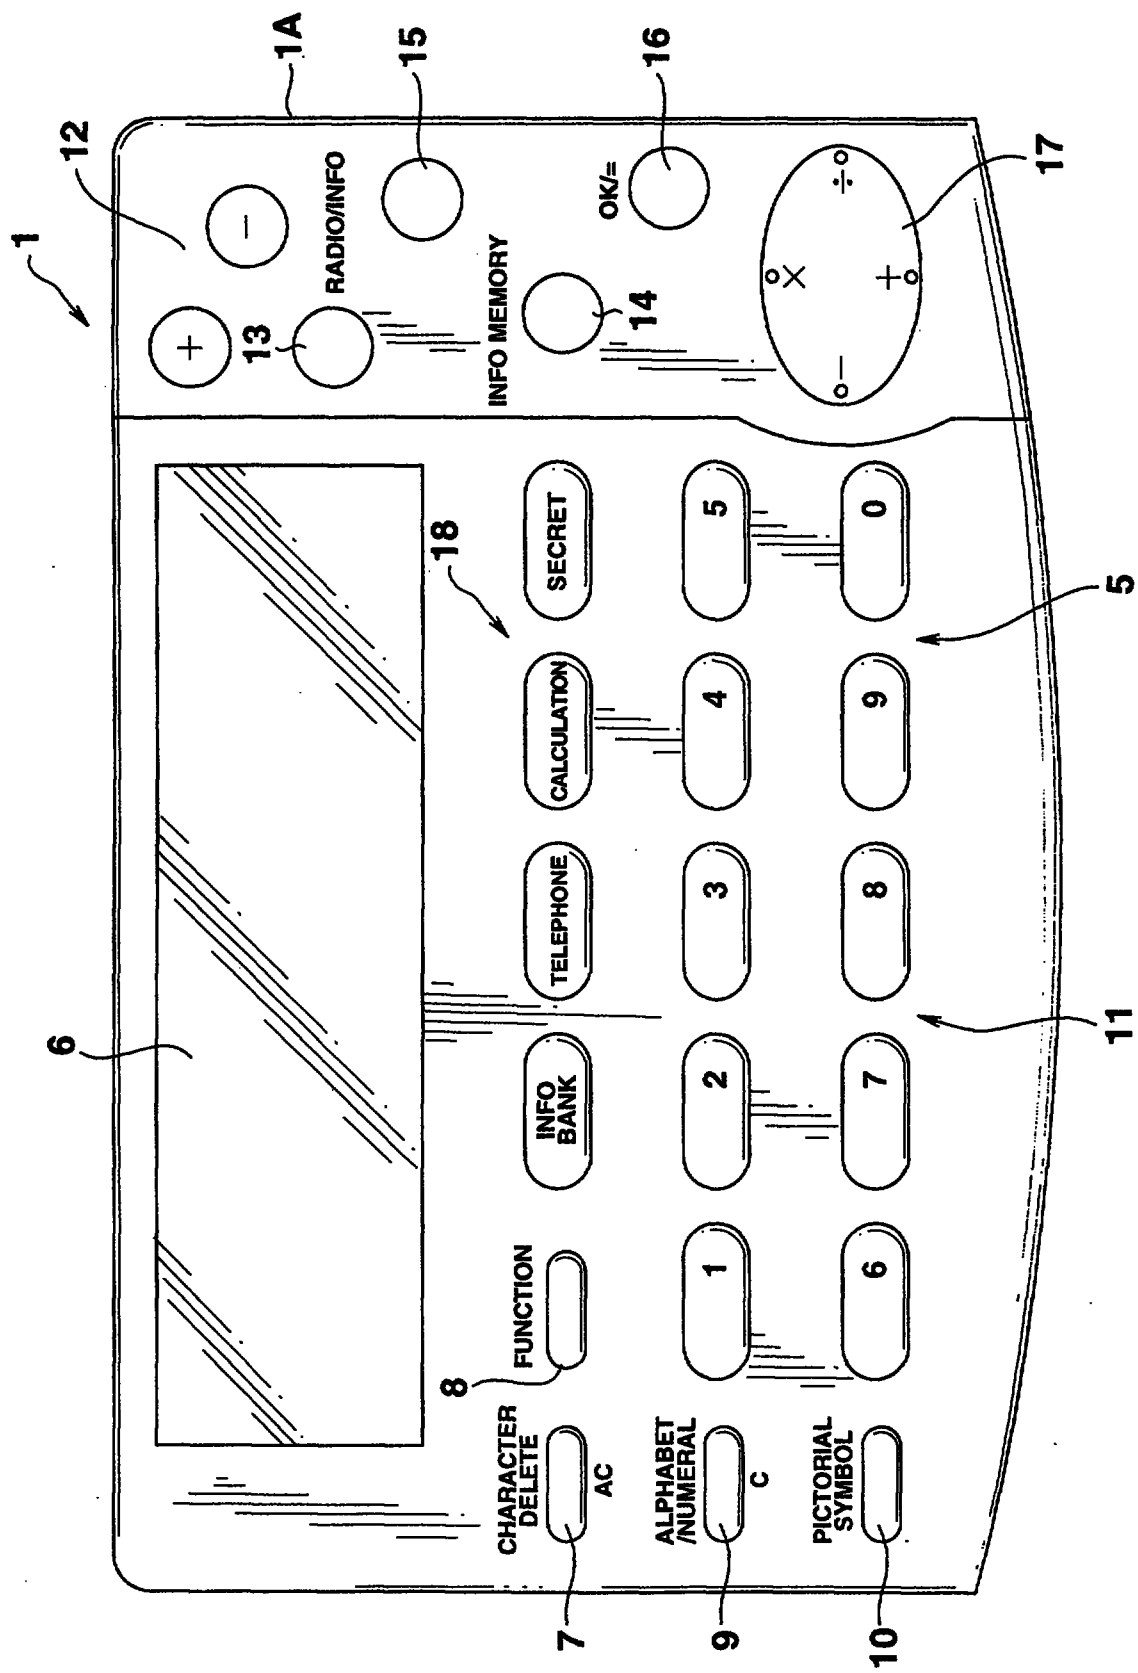


FIG.2

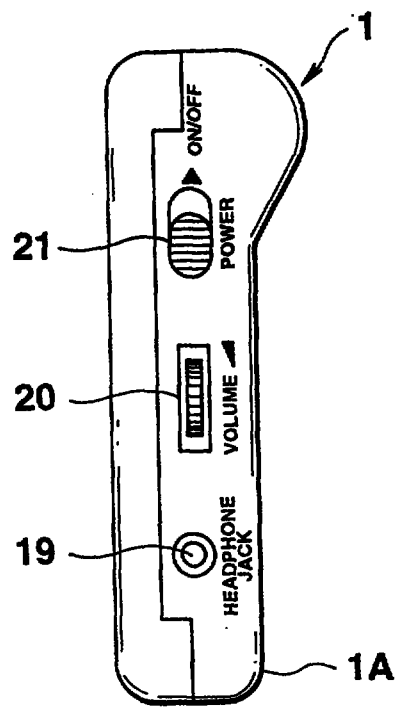


FIG.3

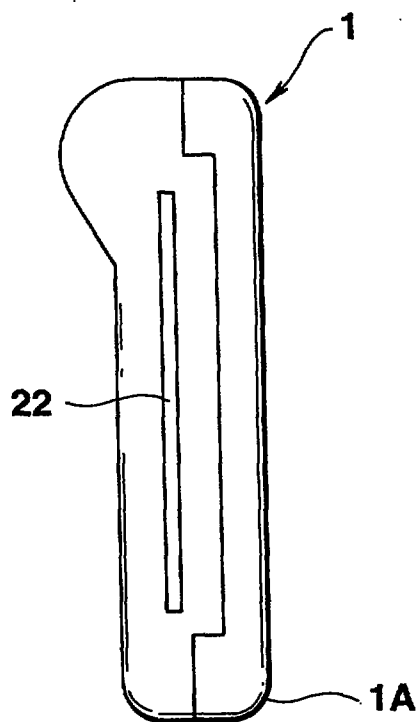


FIG.4

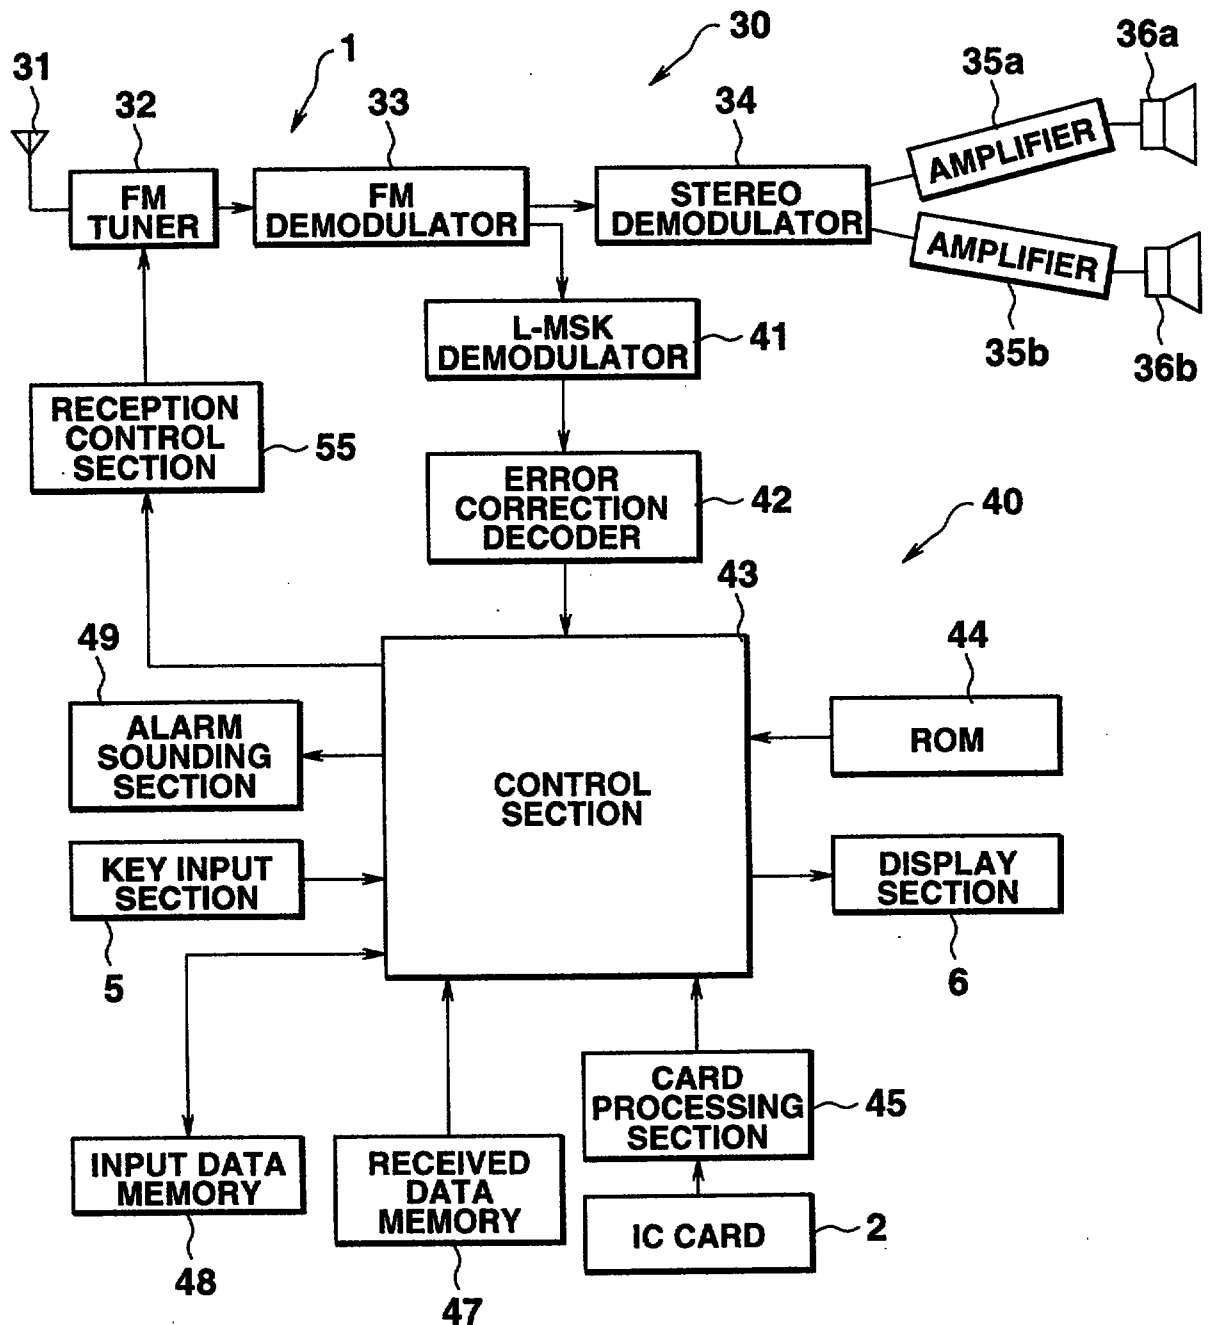


FIG.5

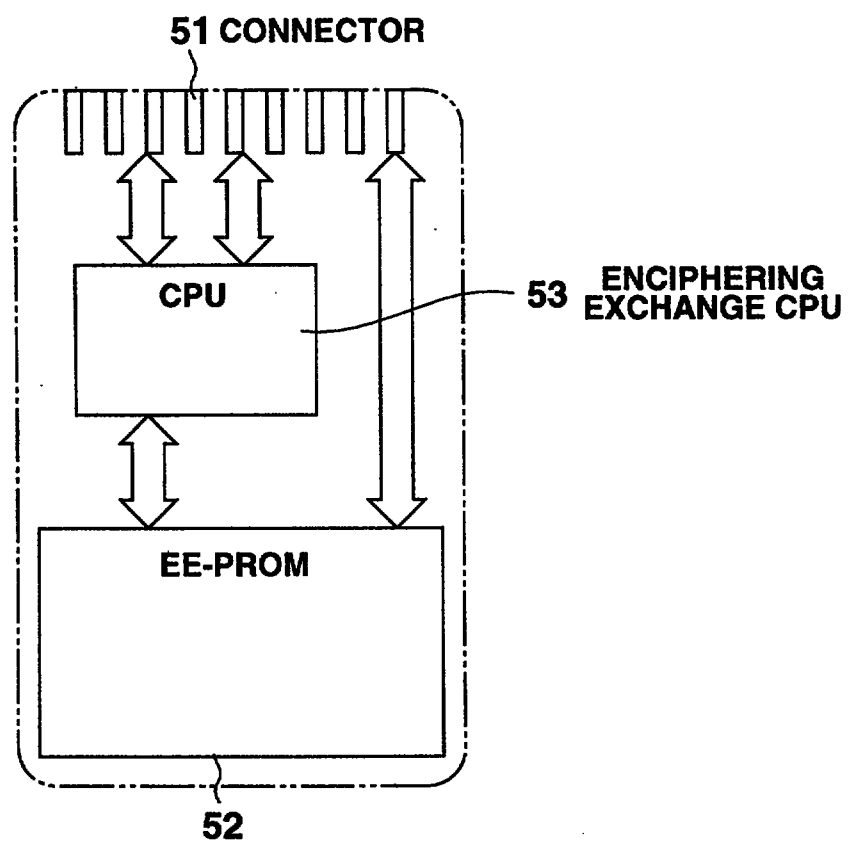


FIG.6

AREA NO.	AREA NAME	STATION NO.	TRANSMISSION FREQUENCY	BROADCASTING STATION NAME
1	HOKKAIDO	1	A MHZ	A STATION
2	AOMORI	2	B	B STATION
3	IWATE	3	C	C STATION
.	.	.	.	.
.	.	.	.	.
.	.	.	.	.
47	OKINAWA	1	X MHZ	X STATION
		2	Y	Y STATION
		3	Z	Z STATION
		.	.	.
		.	.	.
		.	.	.

EXISTS FOR EACH AREA

FIG.8


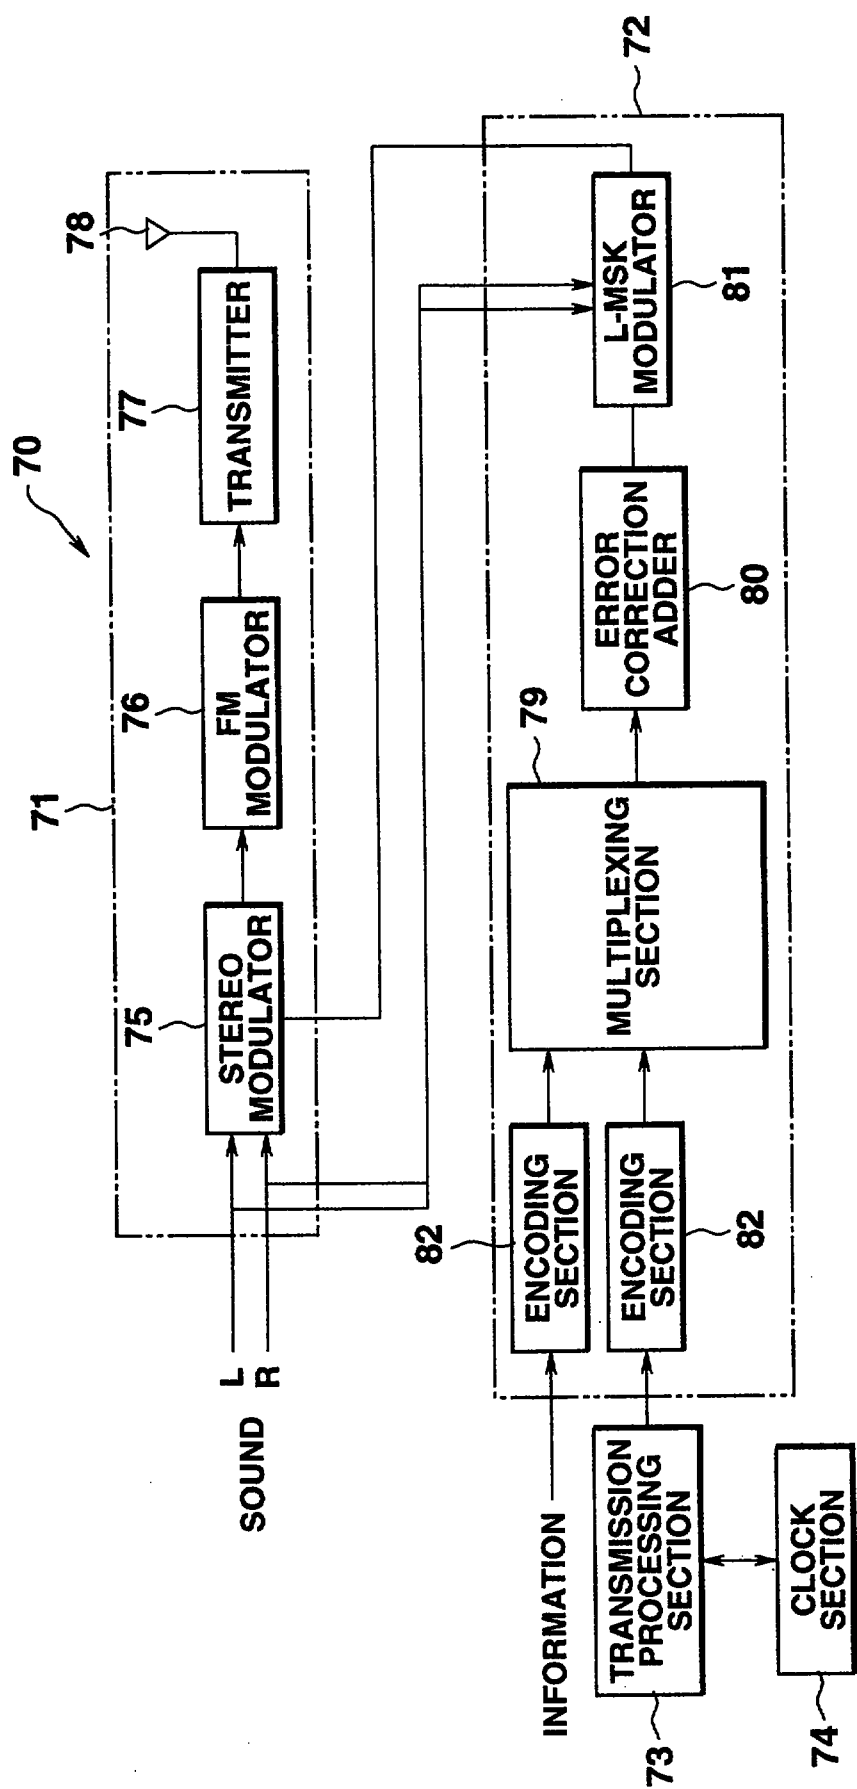


FIG.9

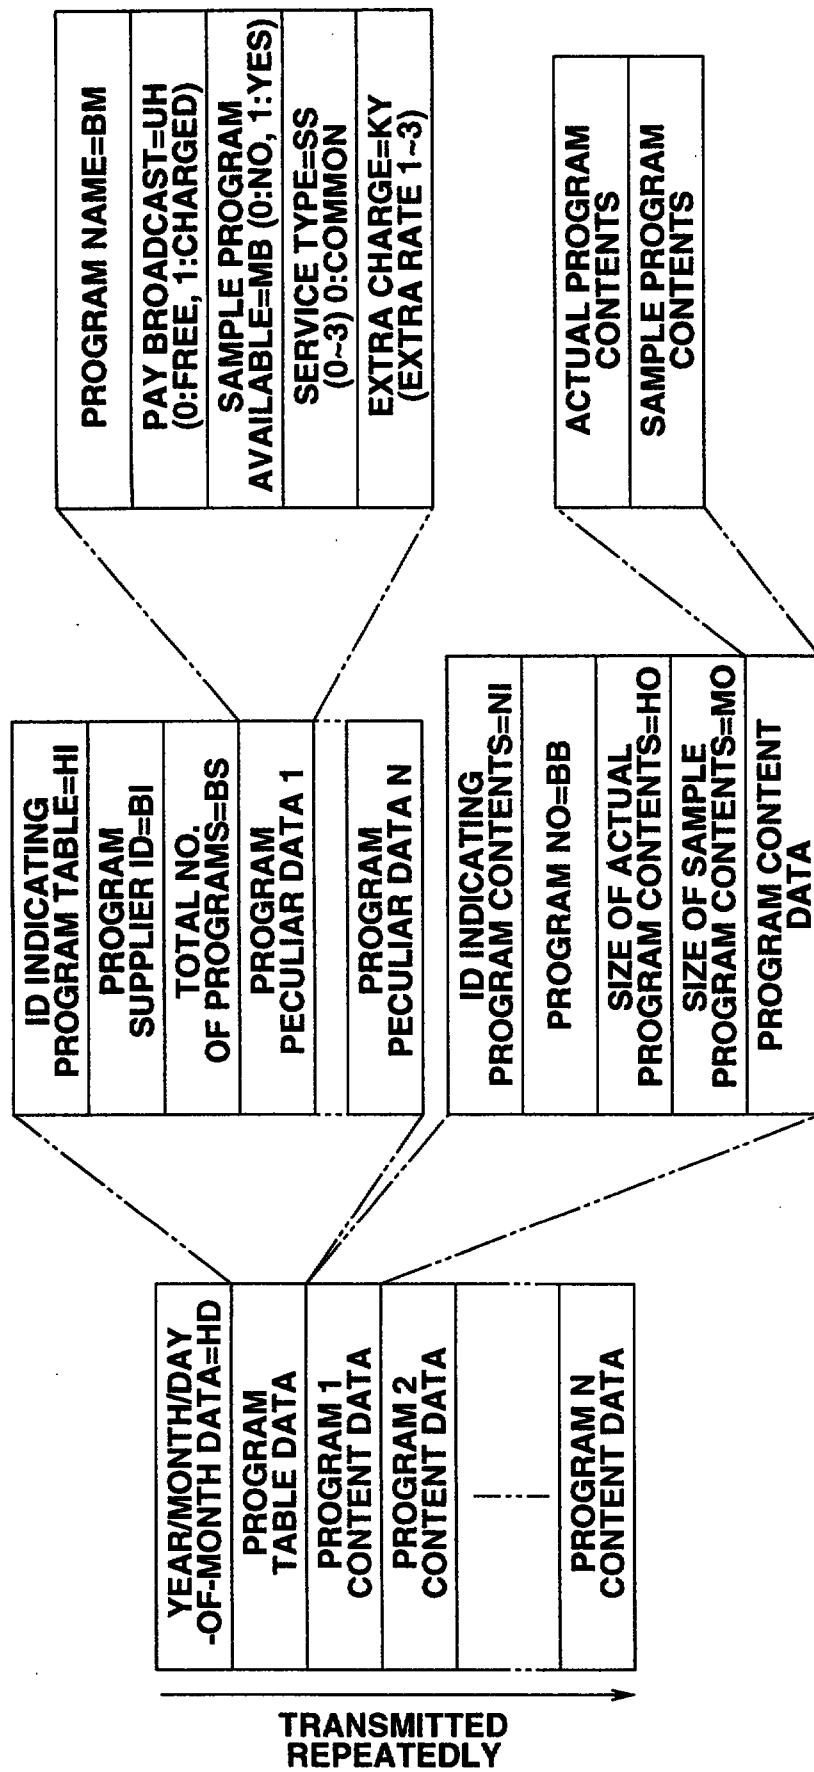

IN THE CASE OF EXAMPLES OF FIGS.18,19,20

BS=8

BM1=PROGRAM a, UH=0, MB=0 SS=0 KY=0 BB=1

BM2=PROGRAM b, UH=1, MB=0 SS=2 KY=1 BB=2

BM3=PROGRAM c, UH=1, MB=1 SS=1 KY=1 BB=3

BM4=PROGRAM d, UH=1, MB=1 SS=2 KY=2 BB=4

BM5=PROGRAM e, UH=1, MB=0 SS=0 KY=0 BB=5

BM6=PROGRAM f, UH=1, MB=1 SS=3 KY=3 BB=6

BM7=PROGRAM g, UH=1, MB=0 SS=1 KY=1 BB=7

BM8=PROGRAM h, UH=1, MB=0 SS=2 KY=1 BB=8

FIG.10

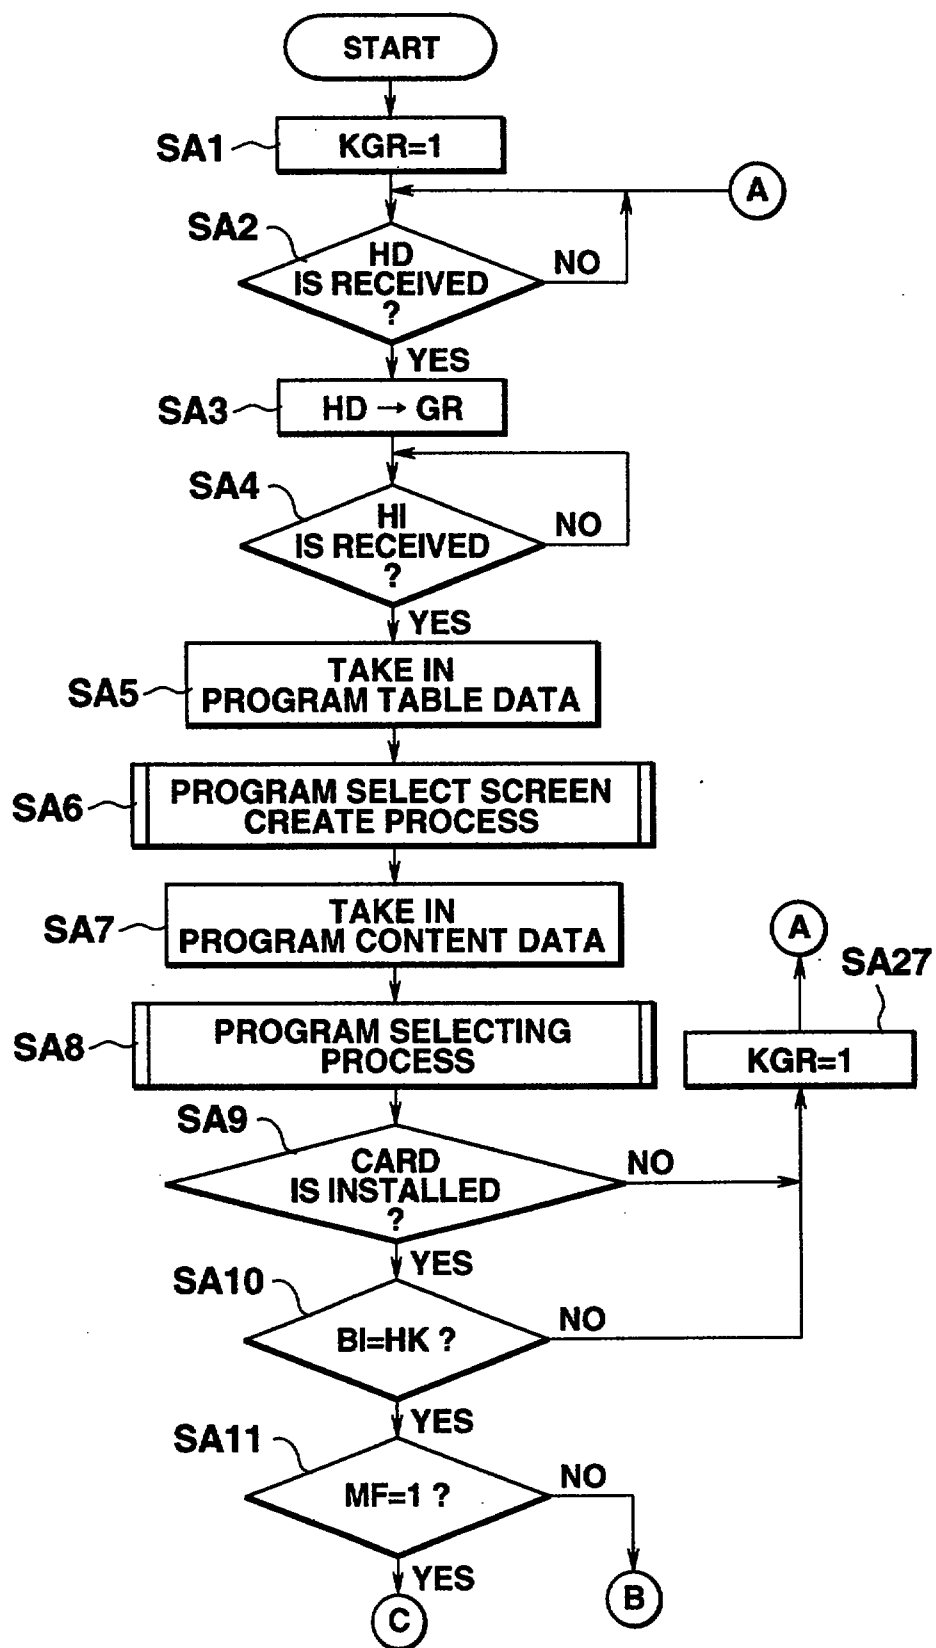


FIG.11

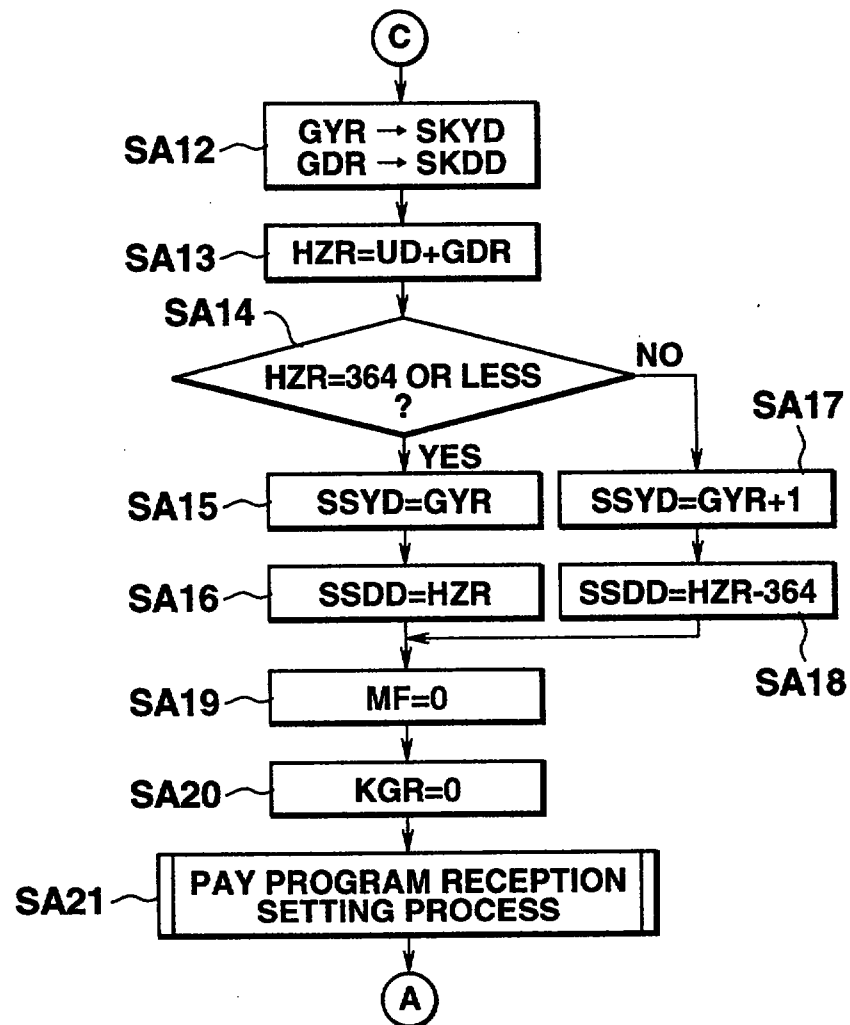


FIG.12

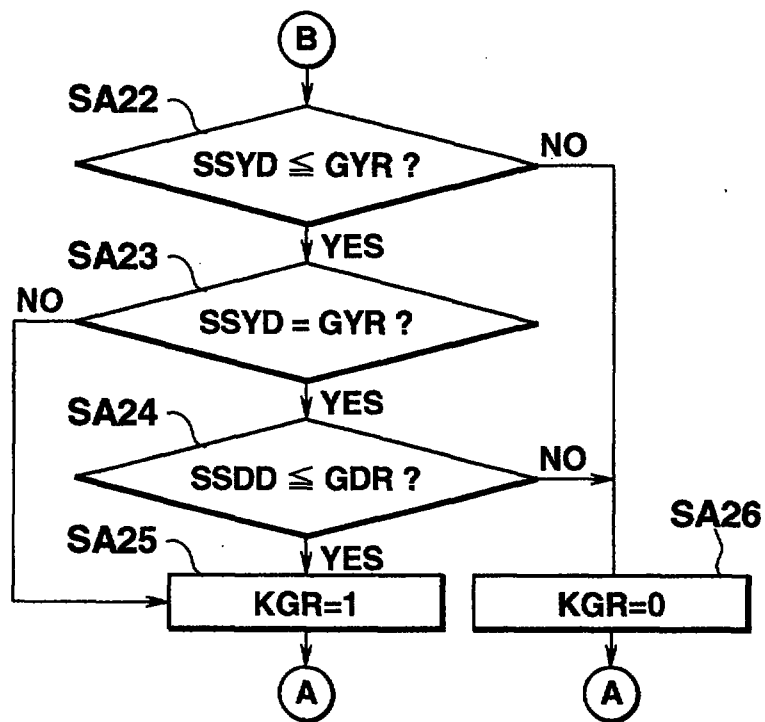


FIG.13

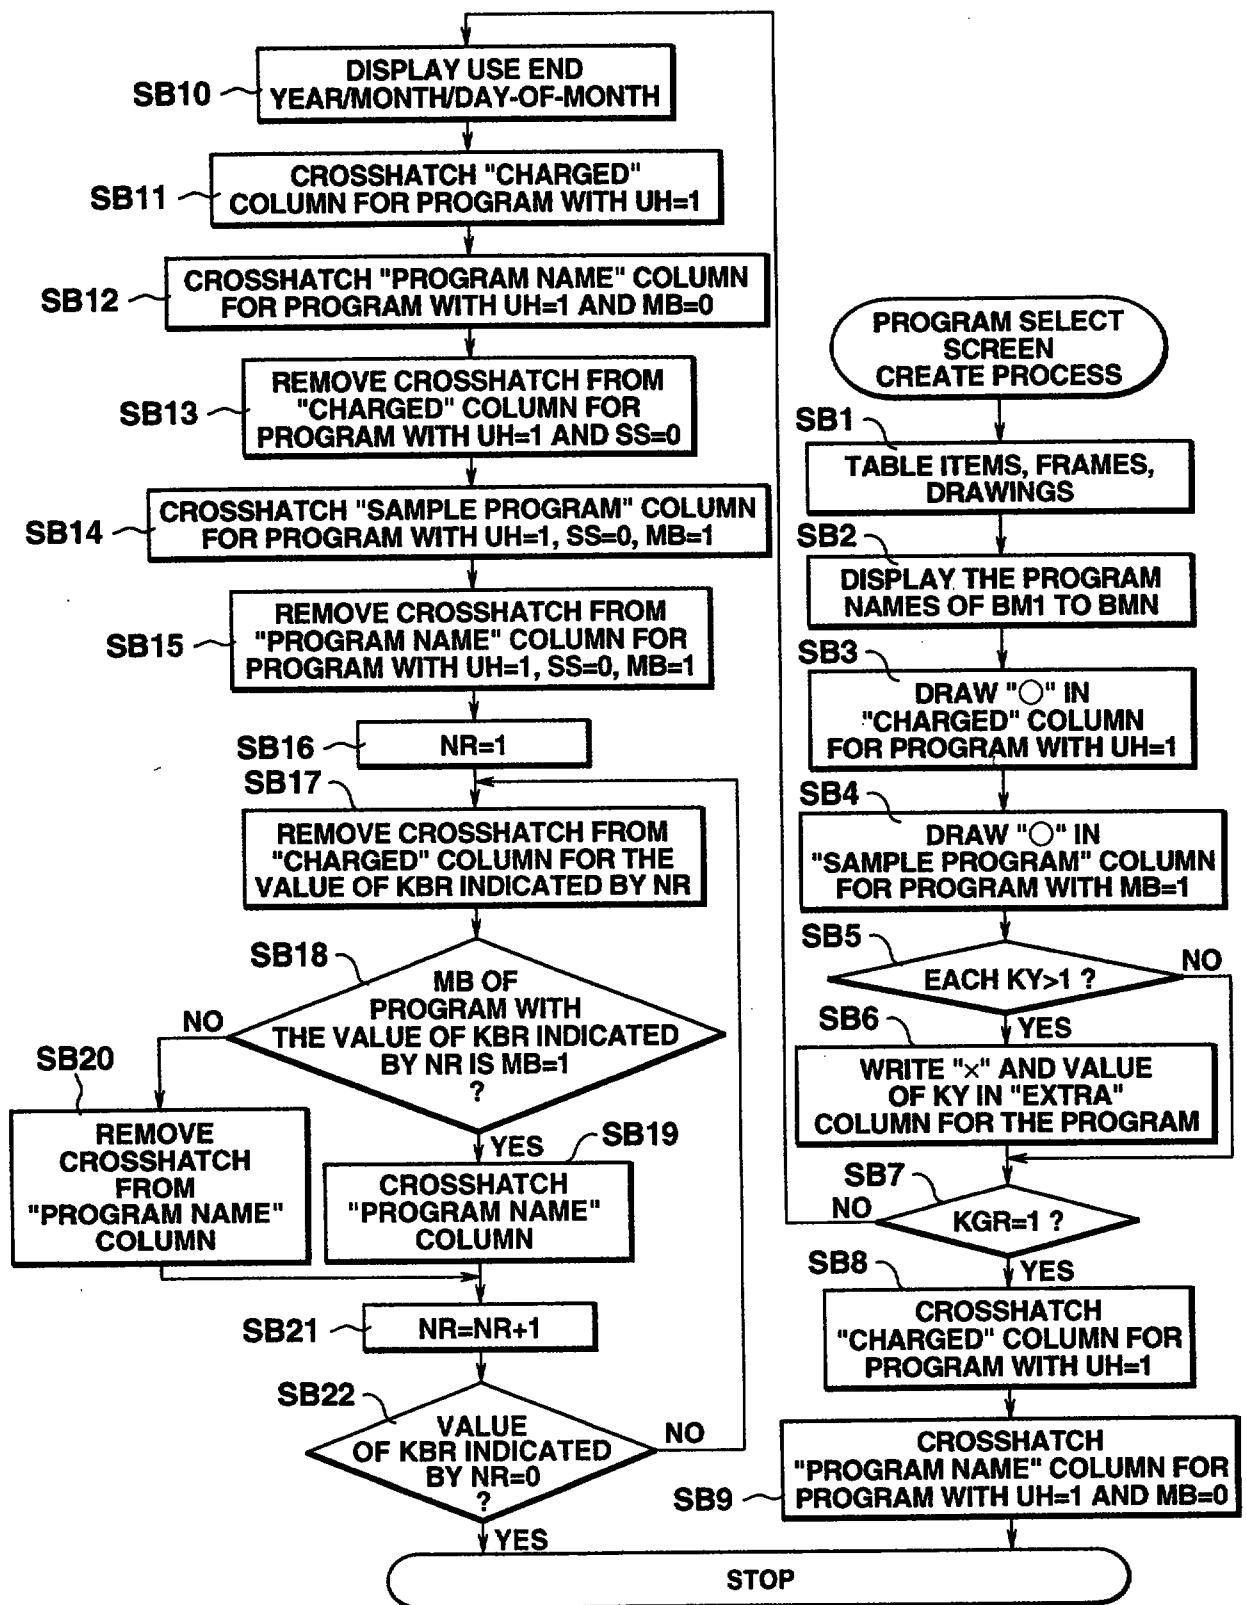


FIG.14

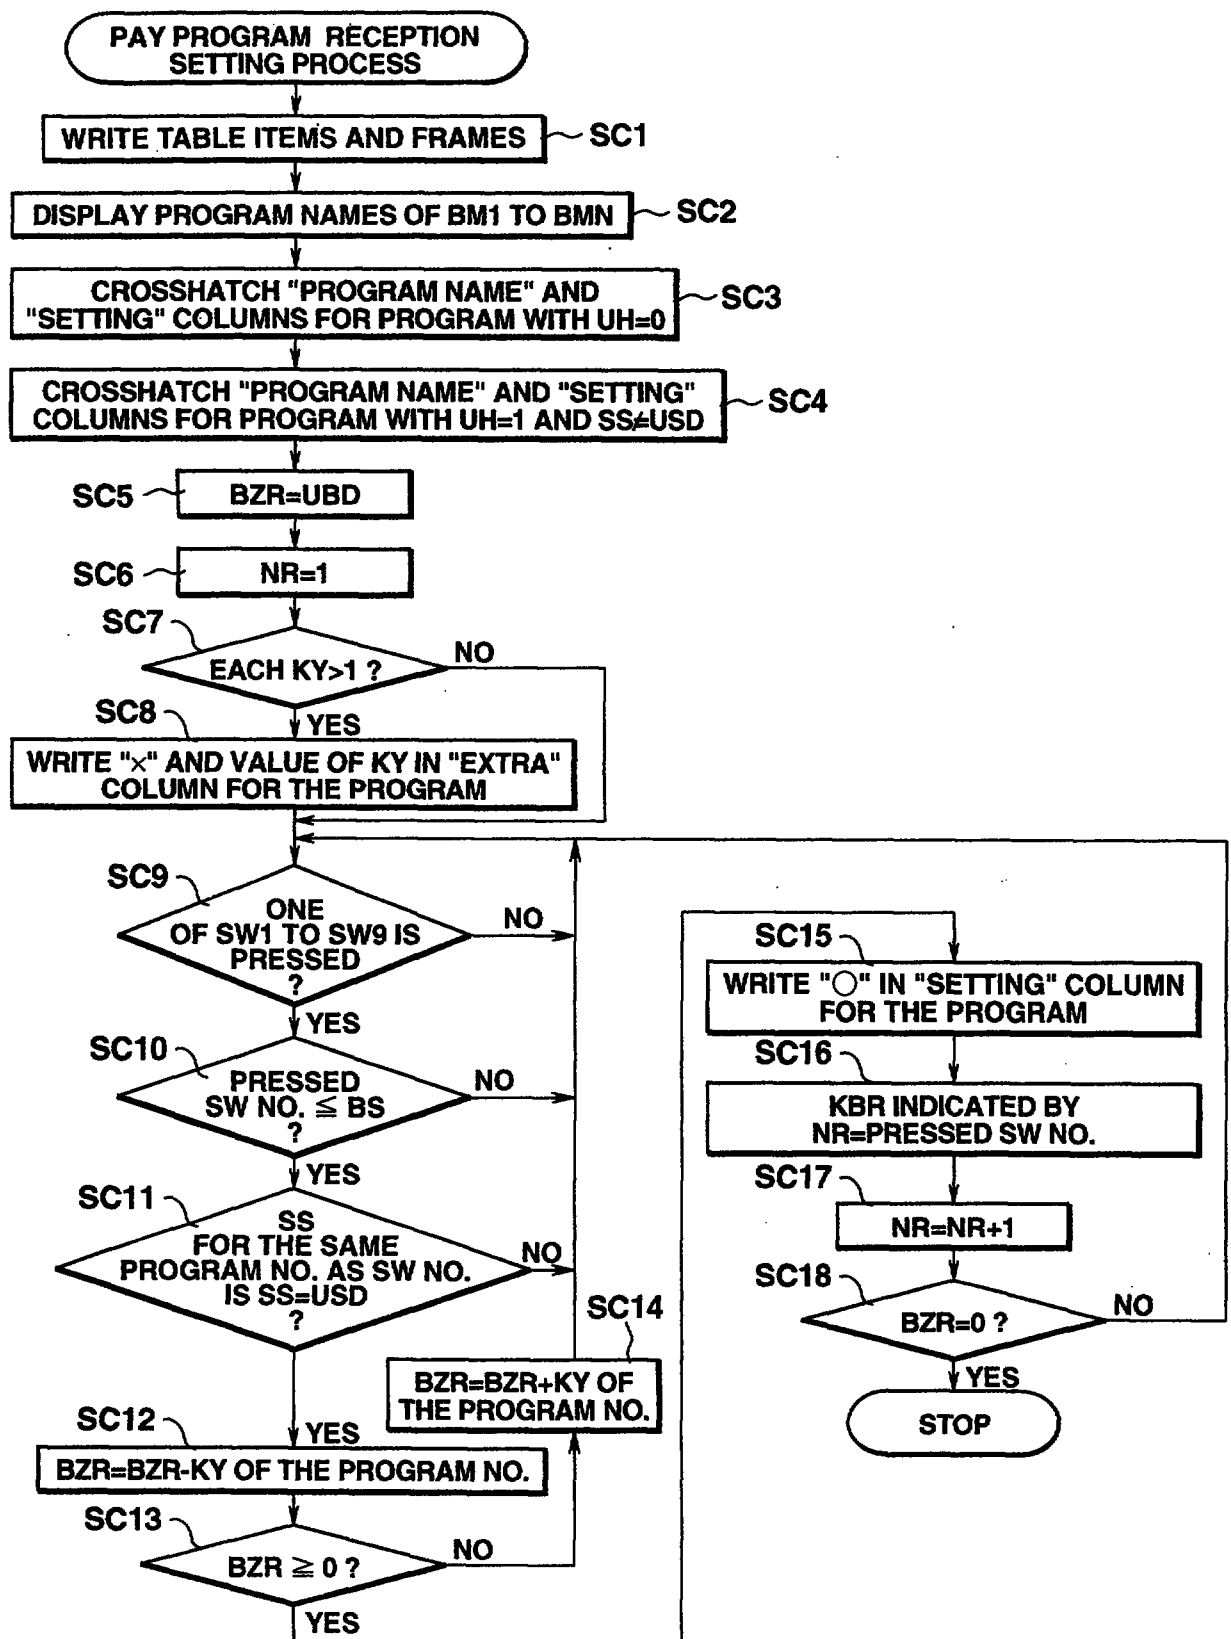


FIG.15

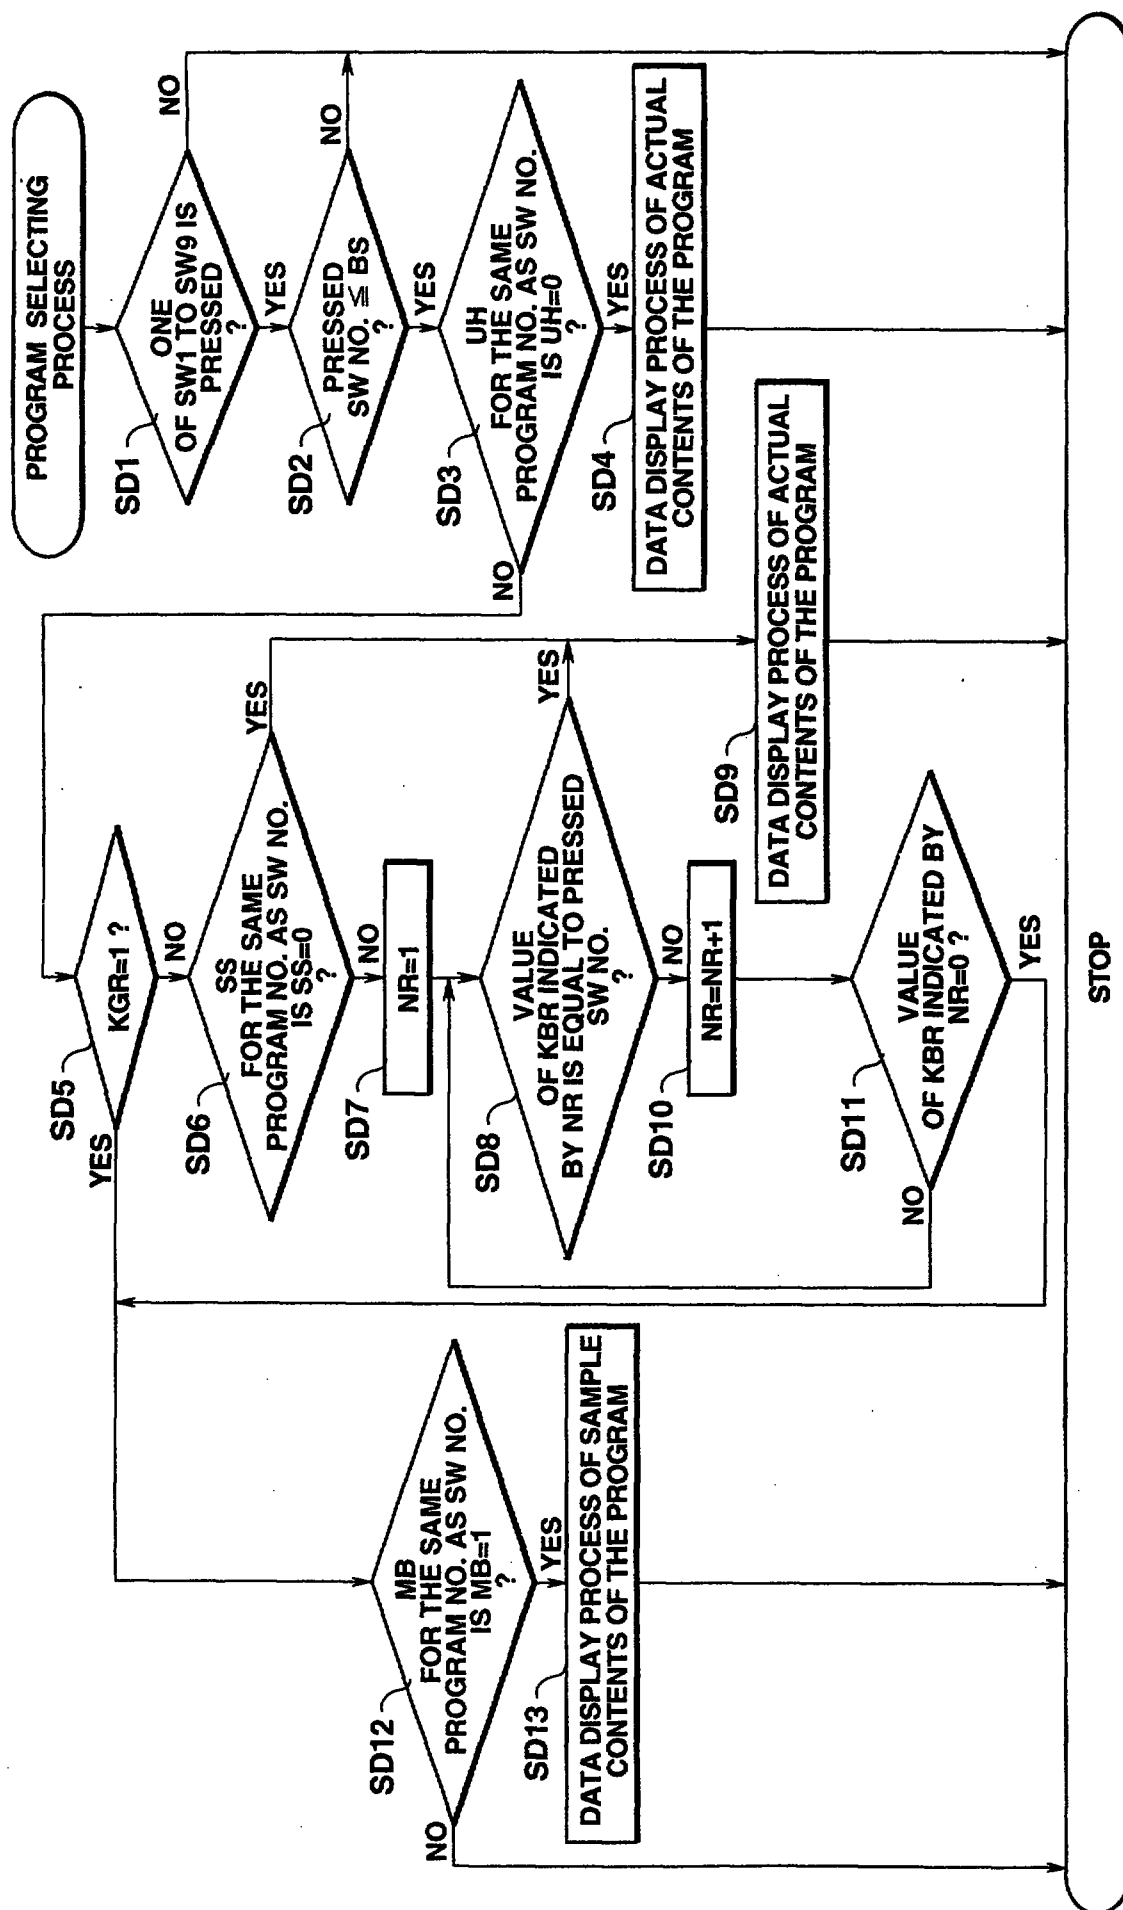


FIG.16

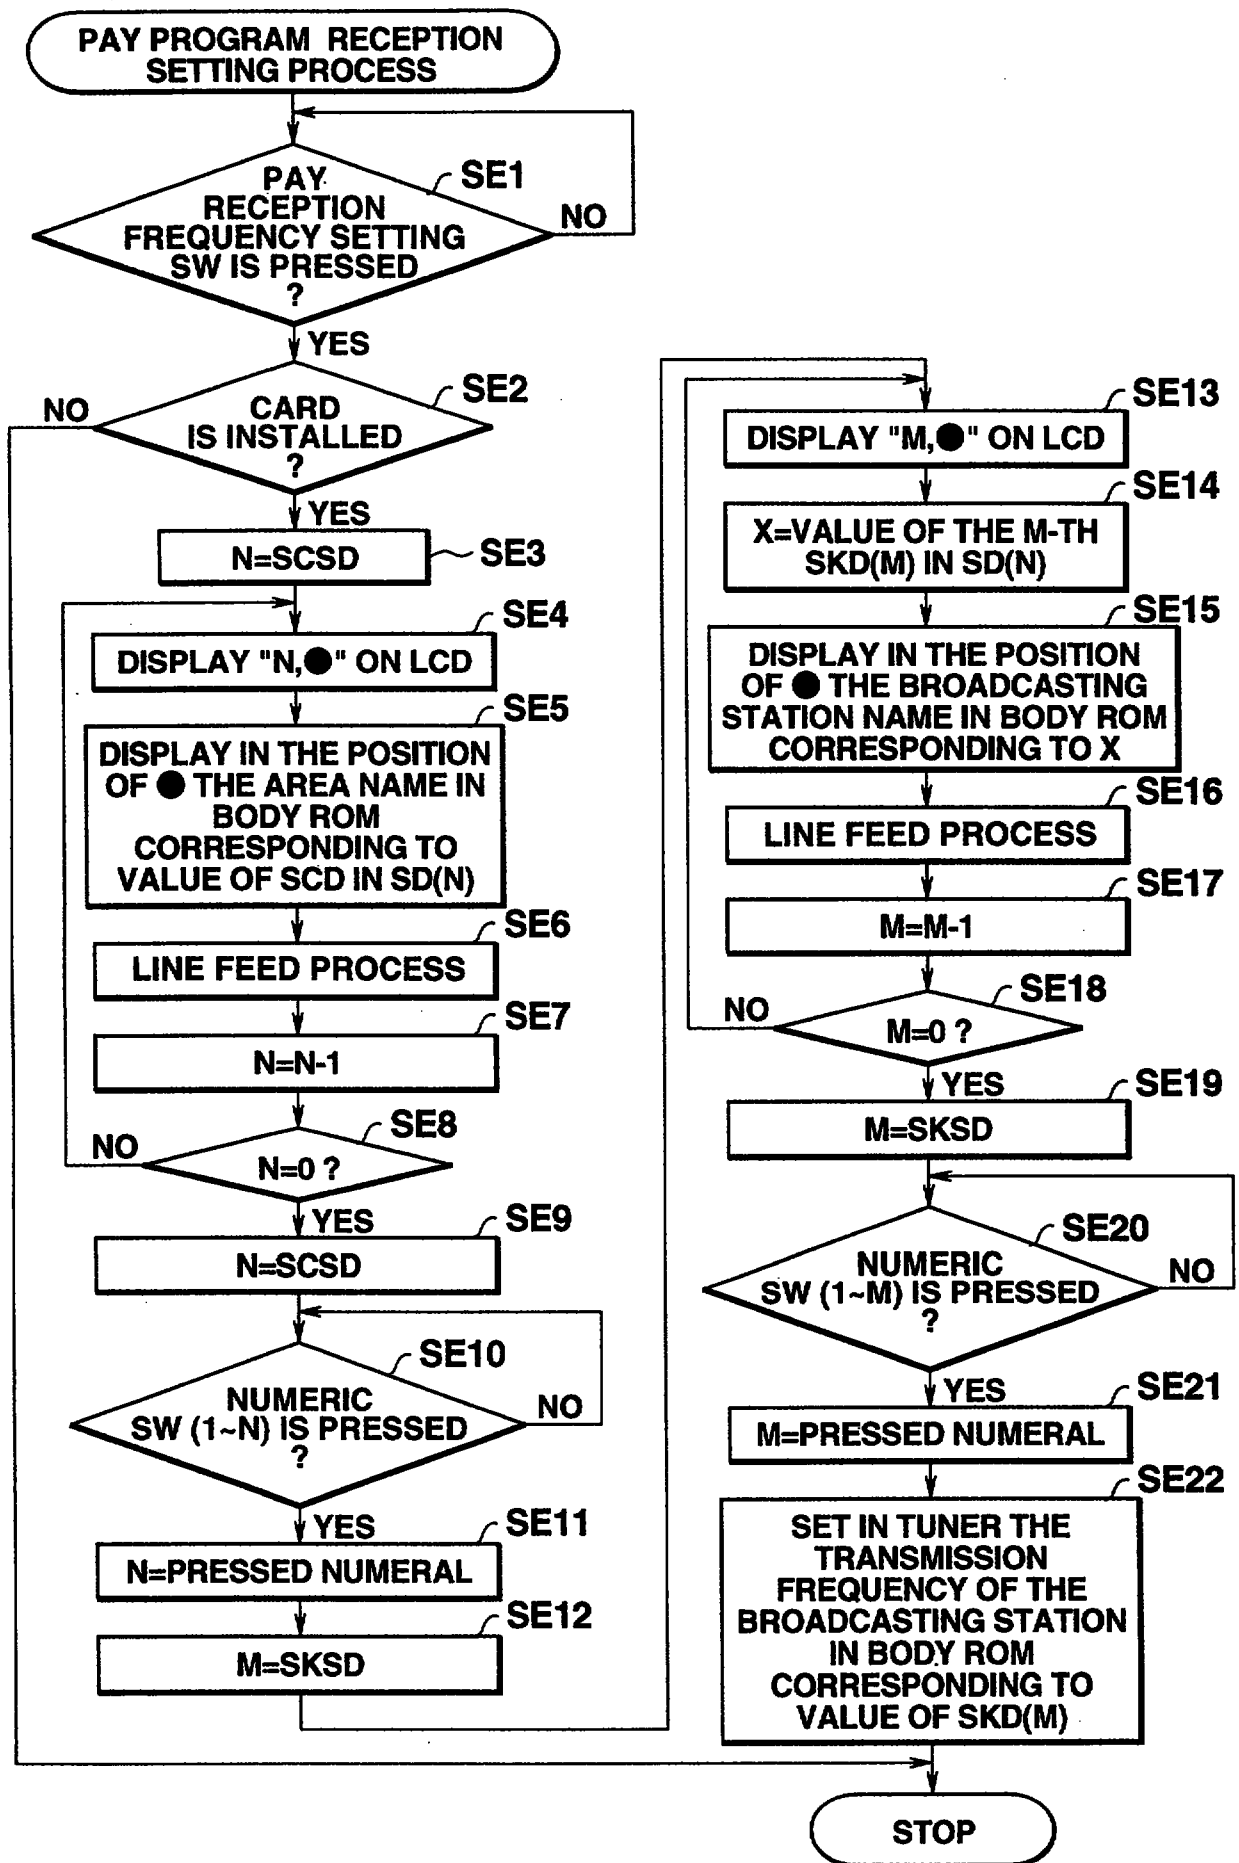


FIG.17

PROGRAM TABLE						
PROGRAM NAME	CHARGED	SAMPLE PROGRAM	EXTRA	PROGRAM NAME	CHARGED	SAMPLE PROGRAM
1.PROGRAM a				5.PROGRAM e		
2.PROGRAM b				6.PROGRAM f		
3.PROGRAM c				7.PROGRAM g		
4.PROGRAM d			x2	8.PROGRAM h		
						x3


FIG.18

PROGRAM TABLE				USE END YEAR/MONTH/DAY-OF-MONTH 1996.12.31			
PROGRAM NAME	CHARGED	SAMPLE PROGRAM	EXTRA	PROGRAM NAME	CHARGED	SAMPLE PROGRAM	EXTRA
1.PROGRAM a				5.PROGRAM e	☐		
2.PROGRAM b	☐			6.PROGRAM f	☐	☐	×3
3.PROGRAM c	☐	☐		7.PROGRAM g	☐		
4.PROGRAM d	☐	☐	×2	8.PROGRAM h	☐		

FIG.19

PAY PROGRAM RECEPTION SETTING			NO. OF SETTABLE PROGRAMS 0		
PROGRAM NAME	CHARGED	EXTRA	PROGRAM NAME	CHARGED	EXTRA
1.PROGRAM a			5.PROGRAM e		x3
2.PROGRAM b	○		6.PROGRAM f		
3.PROGRAM c			7.PROGRAM g		
4.PROGRAM d	○	x2	8.PROGRAM h		

FIG.20

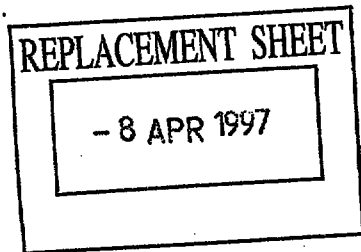

PTAP.

Substitute sheet - 8/4/97

- 43 -



C L A I M S

1. A display information receiving device comprising:

receiving means for receiving the display information transmitted from a display information transmitting station;

display means for displaying the display information received by said receiving means;


a device body which enables installation and removal of a storage medium that stores the time information indicating ^atime;

acquiring means for acquiring the present time;

judging means for judging whether or not the present time acquired by said acquiring means has reached at the time indicated by the time information stored in the storage medium installed in said device body; and

control means for inhibiting the display of the display information transmitted from said display information transmitting station after said judging means has judged that the present time has reached at the ~~stored~~ time.

2. A display information receiving device according to claim 1, wherein said display information is multiplexed with FM broadcast radiowaves and then transmitted, and said receiving means contains means for receiving the FM broadcast radiowaves and decoding



6. A display information receiving device

according to claim 1, wherein said storage medium has stored period information and contains

computing means for computing said time stored in said storage medium on the basis of the present time acquired by said acquiring means and the period information stored in said storage medium, and

writing means for writing the time computed by said computing means into said storage medium as time information.

7. A display information receiving device

comprising:

receiving means for receiving a plurality of kinds of display information transmitted from a display information transmitting station;

display means for displaying the display information received by the receiving means;


a device body which enables installation and removal of a storage medium that stores point value information indicative of point values;

select means for selecting display information of a desired kind from among said plurality of kinds of display information;

selection restricting means for restricting the number of kinds of display information selected by the select means, in accordance with the point values represented by the point value information;

kind indication information-setting means for setting kind indication information indicating the kind of display information selected by the select means; and

display control means for permitting the display means to display the kind of display information represented by the kind indication information set by the kind indication information-setting means,



- 47 - Substitute sheet - 8/4/97

10. A display information receiving device according to claim 7, wherein said display information is pay display information;

said receiving means further contains means for receiving free display information; and

said display means further contains means for displaying the free display information received by said receiving means.


11. A display information receiving device according to claim 7, wherein said storage medium further stores service of the display information; and

said select means selects a desired type of display information from the display information represented by the service indication information stored in the storage medium.

12. A display information receiving device according to claim 7, further comprising:

storage means for storing kind indication information indicating the display information and point value information indicating point values in association with each other, said point values being required for permitting the display means to display the kind of display information indicated by the kind indication information,

said selection restricting means restricting a total sum of the point values, which are represented by the point value information stored in the storage means in association with the kind indication information selected by the select means, in accordance with the point value represented by the point value information stored in the storage medium, whereby the number of types of display information selected by the select means is restricted.

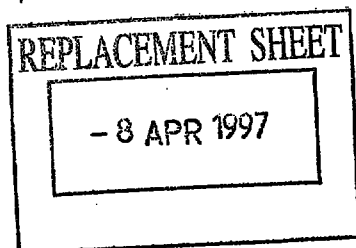

Substitute sheet - 8/4/97

- 49 -



the stored time.

15. A display information receiving device according to claim 13, wherein said display information is pay display information;

5 said receiving means further contains means for receiving free display information multiplexed with FM broadcast radiowaves and then transmitted; and

 said display means further contains means for displaying the free display information received by
10 said receiving means.

16. A display information receiving device according to claim 13, wherein each piece of said display information corresponding to the type information stored in said storage medium further
15 contains a plurality of kinds of display information.

17. A display information receiving device comprising:

 receiving means for receiving the display
 information and first information indicating an informant
 ~~information and information indicating the information~~;

20 of said display information transmitted from a display information transmitting station;

 display means for displaying the display information received by said receiving means;

25 a device body which enables installation and removal of a storage medium that stores ^{second} ~~the~~ information indicating the informant who ^{represent said display} ~~gives said display~~ information;

REPLACEMENT SHEET

- 8 APR 1997

Substitute sheet - 8/4/97

- 50 -

second

means for comparing the second information indicating
said informant stored in the storage medium installed
in said device body with the first information indicating the
informant of said display information received by said
receiving means; and

5

control means for inhibiting the display of said
display information when the comparison at said
comparing means has shown that the information
indicating said stored informant disagrees with the
information indicating said received informant.

10

18. A display information receiving device
according to claim 17, wherein said display information
is multiplexed with FM broadcast radiowaves and then
transmitted, and said receiving means contains means
for receiving the FM broadcast radiowaves and decoding
said multiplexed display information.

15

19. A display information receiving device
according to claim 17, wherein said storage medium
further stores the time information indicating ^atime and
contains

20

acquiring means for acquiring the present time,
and

judging means for judging whether or not the
present time acquired by said acquiring means has
reached at the time indicated by the time information
stored in said storage medium; and

25

said control means further contains means for

- 8 APR 1997

Substitute sheet - 8/4/97

- 53 -



said receiving means.

25. A display information receiving device according to claim 21, wherein said storage medium stores a plurality of pieces of data related to said reception frequency and contains select means for selecting the desired one from the plurality of pieces of data related to said reception frequency stored in said storage medium; and

said control means controls the reception frequency on the basis of the data selected by said select means.

26. A display information transmission/reception system comprising:


a display information transmitting device for transmitting display information and present time information;

a storage medium for storing the time information indicating ^atime; and

a display information receiving device which enables installation and removal of said storage medium that receives the display information and present time information transmitted from said display information transmitting device, wherein

said display information receiving device comprises:

receiving means for receiving the display information and present time information transmitted



Substitute sheet - 8/4/97

- 55 -



FM broadcast radiowaves and then transmits them; and

said receiving means receives the display information and present time information, both multiplexed with FM broadcast radiowaves and transmitted from said display information transmitting device.

29. A storage medium detachable from a display as claimed in claims 1, 7, 13, 17, 21 and 26 information receiving device/that receives the display information transmitted from a display information transmitting station, comprising:

storage means for storing the time information indicating the time for controlling whether the display on said display information receiving device is allowed or inhibited; and

interface means for interfacing with said display information receiving device.

30. A storage medium detachable from a display as claimed in claims 1, 7, 13, 17, 21 and 26 information receiving device/that receives the display information transmitted from a display information transmitting station, comprising:

storage means for storing the number of points representing an amount of display information for controlling whether the display on said display information receiving device is allowed or inhibited; and

interface means for interfacing with said display information receiving device.

This Sheet Has Been Replaced



- 8 APR 1997

Substitute sheet - 8/4/97

- 56 -

31. A storage medium detachable from a display
as claimed in claims 1, 7, 13, 17, 21 and 26
information receiving device/that receives the display
information multiplexed with FM broadcast radiowaves
and transmitted from a display information transmitting
station, comprising:

storage means for storing the type information
indicating the type of the display information for
controlling whether the display on said display
information receiving device is allowed or inhibited;
and

interface means for interfacing with said display
information receiving device.

32. A storage medium detachable from a display
as claimed in claims 1, 7, 13, 17, 21 and 26
information receiving device/that receives the display
information transmitted from a display information
transmitting station, comprising:

storage means for storing the information
indicating an informant of the display information for
controlling whether the display on said display
information receiving device is allowed or inhibited;
and

interface means for interfacing with said display
information receiving device.

33. A storage medium detachable from a display
as claimed in claims 1, 7, 13, 17, 21 and 26
information receiving device/that receives the display
information transmitted from a display information
transmitting station, comprising:

This Sheet Has Been Replaced



FM broadcast radiowaves and then transmits them; and

said receiving means receives the display information and present time information, both multiplexed with FM broadcast radiowaves and transmitted from said display information transmitting device.

29. A storage medium detachable from a display as claimed in claims 1, 7, 13, 17, 21/and 26 /or information receiving device/that receives the display information transmitted from a display information transmitting station, comprising:

storage means for storing the time information indicating the time for controlling whether the display on said display information receiving device is allowed or inhibited; and

interface means for interfacing with said display information receiving device.

30. A storage medium detachable from a display as claimed in claims 1, 7, 13, 17, 21/and 26 /or information receiving device/that receives the display information transmitted from a display information transmitting station, comprising:

storage means for storing th number of points representing an amount of display information for controlling whether the display on said display information receiving device is allowed or inhibited; and

interface means for interfacing with said display information receiving device.

REPLACEMENT SHEET

11 NOV 1997

31. A storage medium detachable from a display
as claimed in claims 1, 7, 13, 17, 21/~~and 26~~ /or
information receiving device/ that receives the display
information multiplexed with FM broadcast radiowaves
and transmitted from a display information transmitting
station, comprising:

storage means for storing the type information
indicating the type of the display information for
controlling whether the display on said display
information receiving device is allowed or inhibited;
and

interface means for interfacing with said display
information receiving device.

32. A storage medium detachable from a display
as claimed in claims 1, 7, 13, 17, 21/~~and 26~~ /or
information receiving device/ that receives the display
information transmitted from a display information
transmitting station, comprising:

storage means for storing the information
indicating an informant of the display information for
controlling whether the display on said display
information receiving device is allowed or inhibited;
and

interface means for interfacing with said display
information receiving device.

33. A storage medium detachable from a display
as claimed in claims 1, 7, 13, 17, 21/~~and 26~~ /or
information receiving device/ that receives the display
information transmitted from a display information
transmitting station, comprising:

REPLACEMENT SHEET

11 NOV 1997