

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 September 2001 (13.09.2001)


PCT

(10) International Publication Number
WO 01/66490 A3

- (51) International Patent Classification⁷: **C04B 35/52**, 38/00, F28F 21/02, F28C 3/08, C04B 40/00
- (21) International Application Number: PCT/US01/07012
- (22) International Filing Date: 5 March 2001 (05.03.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/519,559 6 March 2000 (06.03.2000) US
- (71) Applicant: **UT-BATTELLE, LLC** [US/US]; 111 B Union Valley Road, P.O. Box 2008, Oak Ridge, TN 37831-6498 (US).
- (72) Inventors: **KLETT, James, W.**; 10073 Delle Meade Drive, Knoxville, TN 37931 (US). **BURCHELL, Timothy, D.**; 109 Greywood Place, Oak Ridge, TN 37830 (US). **CHOUDHURY, Ashok**; 111 Mohawk Road, Oak Ridge, TN 37830 (US).
- (74) Agents: **NELSON, Gregory, A.** et al.; Akerman, Senterfitt & Eidson, PA, Suite 400, 222 Lakeview Avenue, P.O. Box 3188, West Palm Beach, FL 33402-3188 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report

[Continued on next page]

(54) Title: PITCH-BASED CARBON FOAM AND COMPOSITES AND USES THEREOF

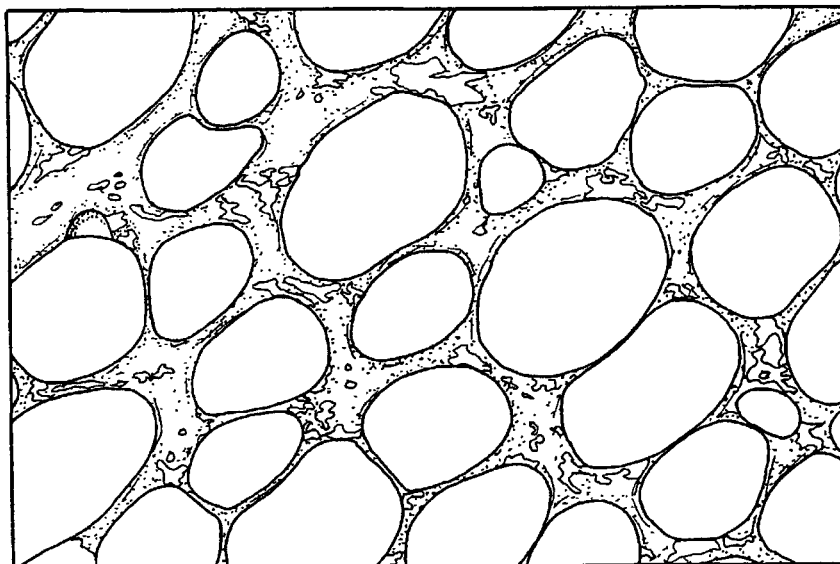

(57) Abstract: A thermally conductive carbon foam is provided, normally having a thermal conductivity of at least 40 W/m.K. The carbon foam usually has a specific thermal conductivity, defined as the thermal conductivity divided by the density, of at least about 75 W.cm³/m.³°K.gm. The foam also has a high specific surface area, typically at least about 6,000 m²/m³. The foam is characterized by an x-ray diffraction pattern having "doublet" 100 and 101 peaks characterized by a relative peak split factor no greater than about 0.470. The foam is graphitic and exhibits substantially isotropic thermal conductivity. The foam comprises substantially ellipsoidal pores and the mean pore diameter of such pores is preferably no greater than about 340 microns. Other materials, such as phase change materials, can be impregnated in the pores in order to impart beneficial thermal properties to the foam. Heat exchange devices and evaporatively cooled heat sinks utilizing the foams are also disclosed.



WO 01/66490 A3



(88) Date of publication of the international search report:
7 March 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.