

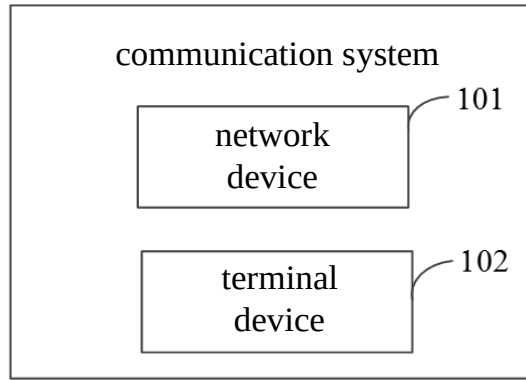


FIG. 1

indicating a time offset of at least one service beam to a terminal device, in which the time offset is configured to adjust the timing relationship between the network device and the terminal device

S10

FIG. 2

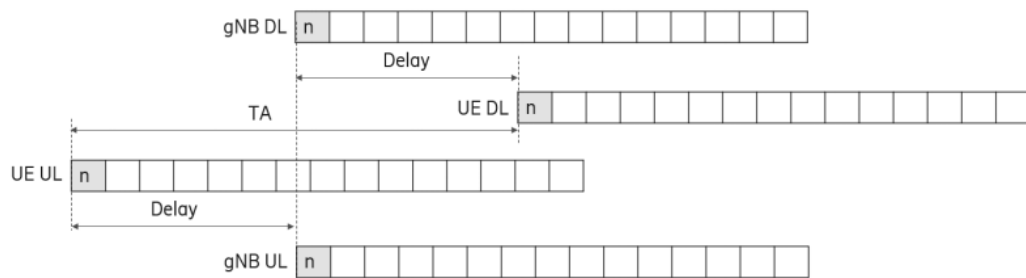


FIG. 3

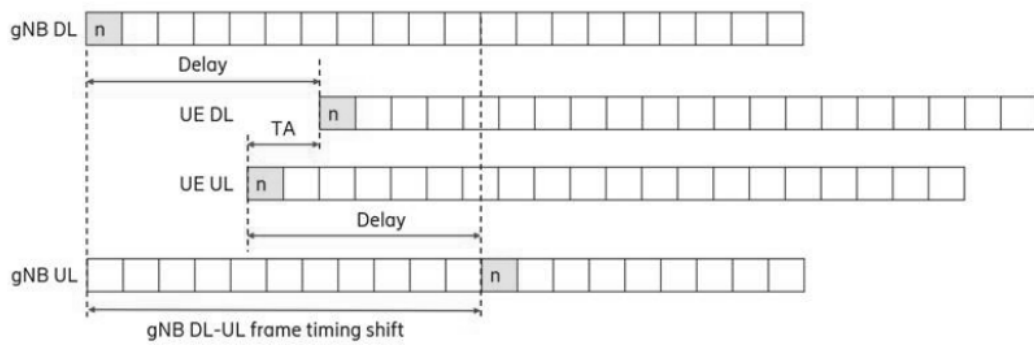


FIG. 4




FIG. 5




FIG. 6

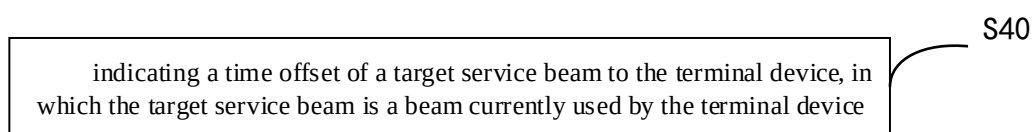


FIG. 7

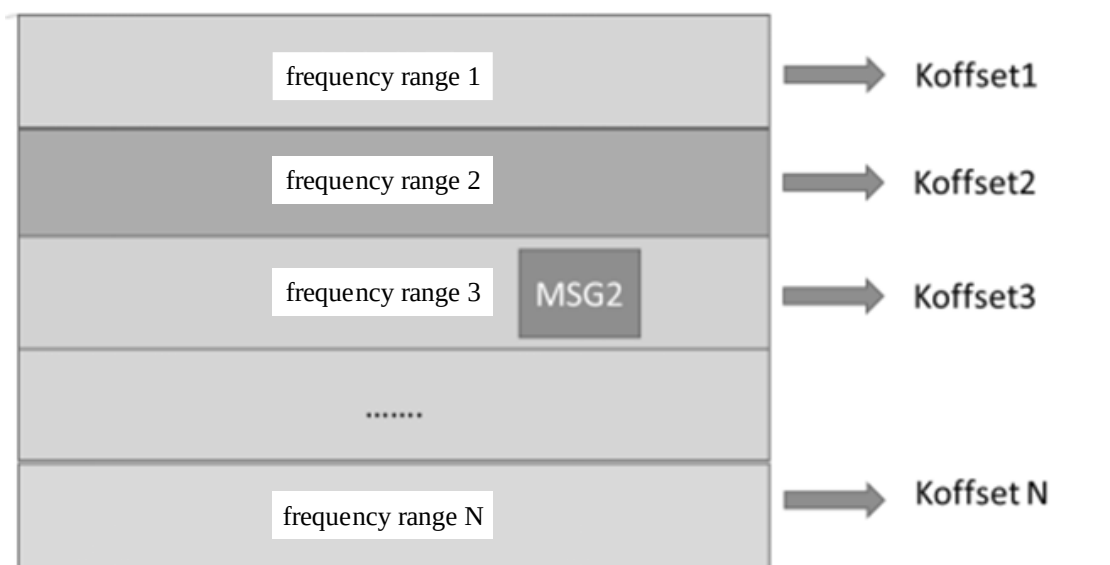


FIG. 8

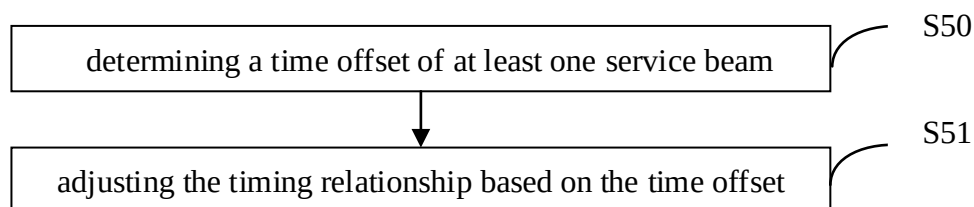


FIG. 9




FIG. 10

receiving indication information sent by a network device, and determining a time offset of a target service beam based on the indication information, in which the target service beam is a beam currently used by the terminal device

S70

FIG. 11

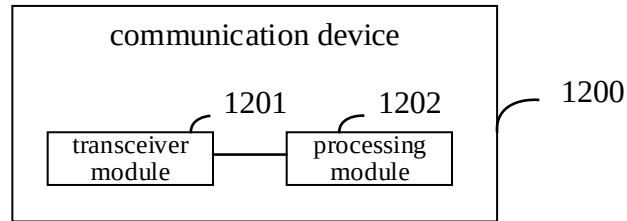


FIG. 12

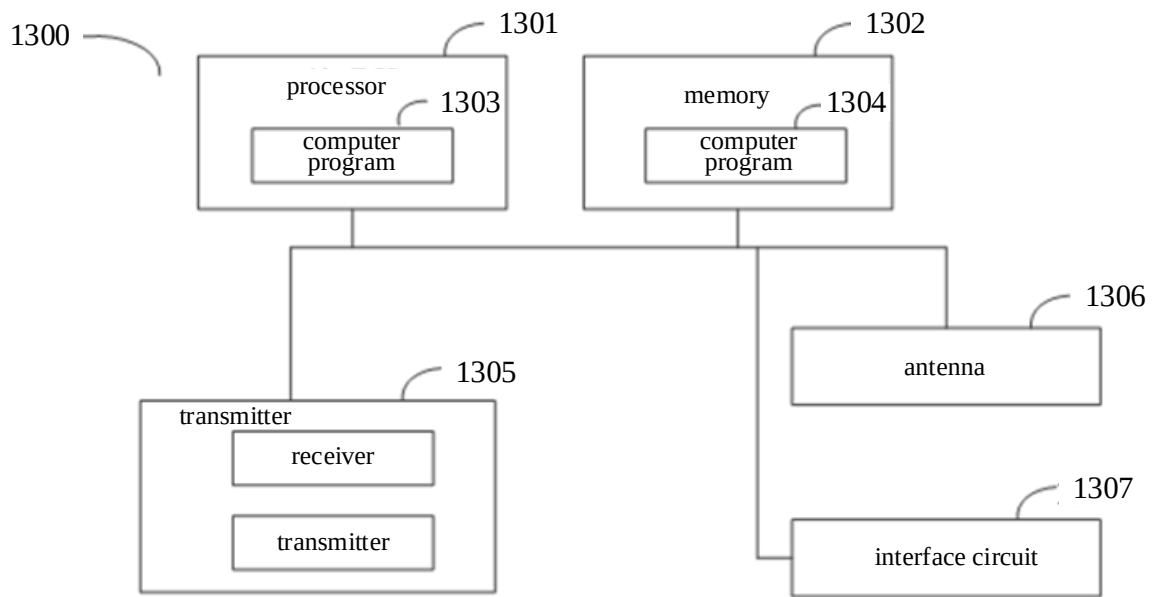


FIG. 13

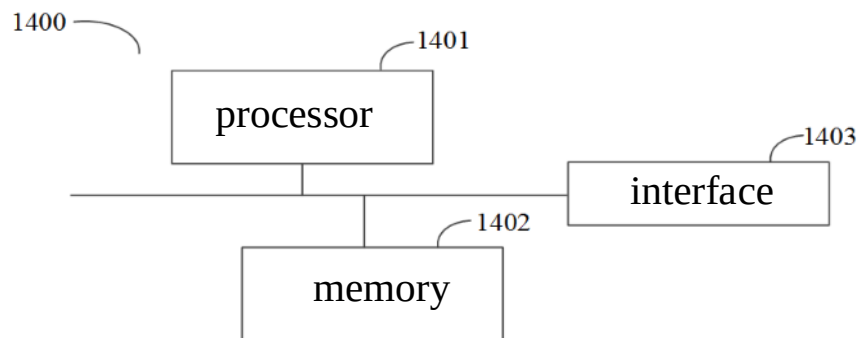


FIG. 14