



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

H04J 14/02, 4/00, 14/00

A1

(11) International Publication Number:

WO 00/04668

(43) International Publication Date:

27 January 2000 (27.01.00)

(21) International Application Number: PCT/US99/16005

(22) International Filing Date: 15 July 1999 (15.07.99)

(30) Priority Data:


09/118,437	17 July 1998 (17.07.98)	US
60/104,443	16 October 1998 (16.10.98)	US
09/339,995	25 June 1999 (25.06.99)	US

(71) Applicant: TELCORDIA TECHNOLOGIES, INC. [US/US];
445 South Street, Morristown, NJ 07960-6438 (US).(72) Inventors: CHANG, Gee-Kung; 7 East Lawn Drive, Holmdel,
NJ 07733 (US). WAY, Winston; 1001 Ta-Shieh Road,
Hsinchu, Taiwan, ROC (CN).(74) Agents: GIORDANO, Joseph et al.; c/o International Coordi-
nator, Room 1G112R, 445 South Street, Morristown, NJ
07960-6438 (US).(81) Designated States: AU, CA, CN, ID, IN, JP, KR, MX, SG,
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

*With international search report.
Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.*

(54) Title: HIGH-THROUGHPUT, LOW-LATENCY NEXT GENERATION INTERNET NETWORKS USING OPTICAL LABEL SWITCHING

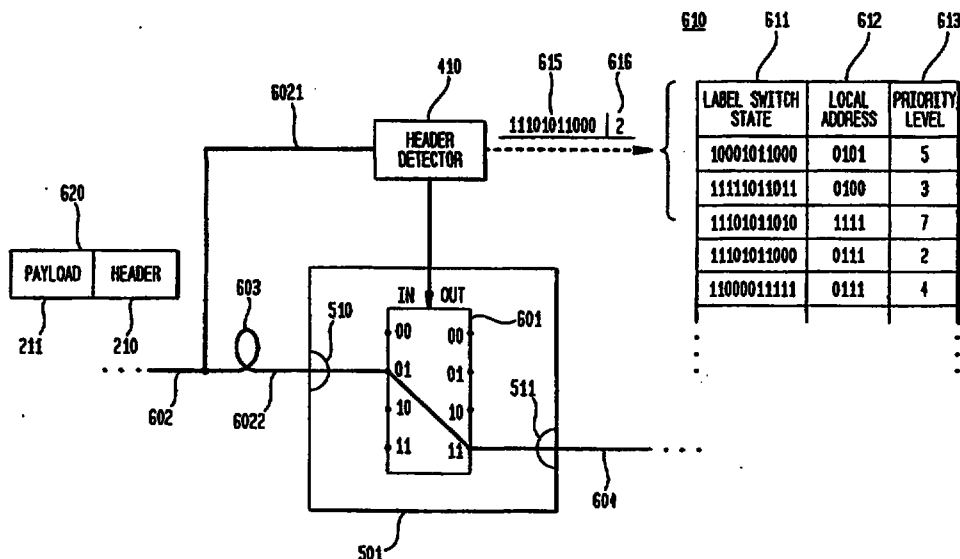

(57) Abstract

An optical signaling header technique applicable to optical networks wherein packet routing information is embedded in the same channel or wavelength as the data payload (211) so that both the header (210) and data payload (211) propagate through network elements with the same path and the associated delays. The header (210) routing information has sufficiently different characteristics from the data payload (211) so that the signaling header can also be removed without affecting the data payload. The signal routing technique can overlaid onto the conventional network elements in a modular manner using two types of applique modules. The first type effects header encoding and decoding at the entry and exit points of the data payload into and out of the network; the second type effects header detection at each of the network elements.