

24/07/02

2002044931

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

162162

(43) International Publication Date
13 June 2002 (13.06.2002)

PCT

(10) International Publication Number
WO 02/47209 A1(51) International Patent Classification⁷: H01R 13/00

Theodore, A.; 1114 Main Street, No. 3W, Evanston, IL 60202 (US).

(21) International Application Number: PCT/US01/47627

(74) Agent: MURAMATSU, Yasuo; Muramatsu & Associates, Suite 225, 7700 Irvine Center Drive, Irvine, CA 92618 (US).

(22) International Filing Date: 8 December 2001 (08.12.2001)

(25) Filing Language: English

(81) Designated States (national): CN, DE, JP, KR, SG.

(26) Publication Language: English

Declarations under Rule 4.17:

(30) Priority Data:
09/733,508 9 December 2000 (09.12.2000) US

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

(71) Applicants: ADVANTEST CORPORATION [JP/JP]; 32-1, Asahicho 1-chome, Nerima-ku, Tokyo 179-0071 (JP). ADVANTEST AMERICA R & D CENTER, INC. [US/US]; 3201 Scott Boulevard, Santa Clara, CA 95054 (US).

Published:


— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(72) Inventors: ZHOU, Yu; 1711 N Locke Ln., Vernon Hills, IL 60061 (US). YU, David; 222 Lehigh Lane, Bloomington, IL 60108 (US). ALDAZ, Robert, Edward; 1 N 214 Papworth, Carol Stream, IL 60188 (US). KHOURY,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONTACT STRUCTURE AND PRODUCTION METHOD THEREOF AND PROBE CONTACT ASSEMBLY USING SAME

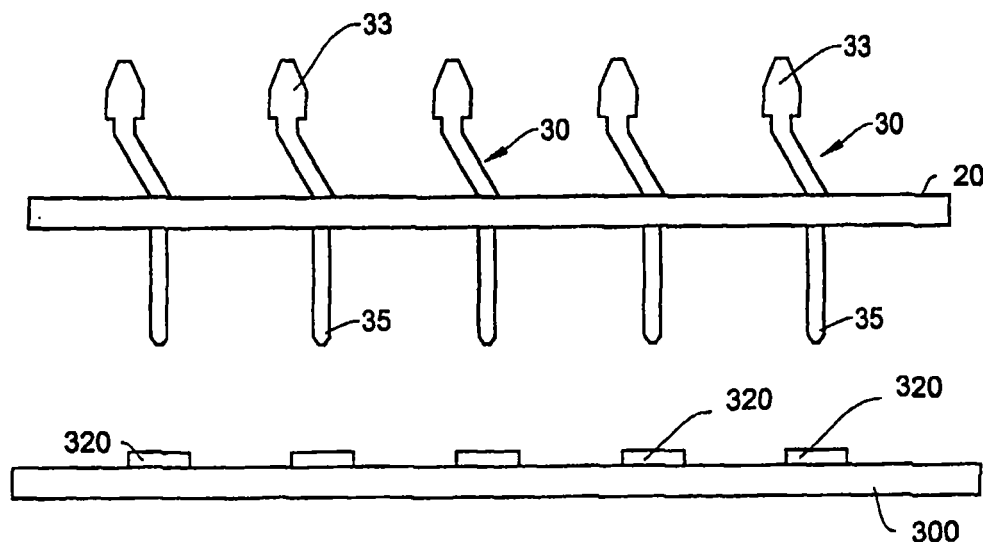

(57) Abstract: A contact structure for establishing electrical connection with contact targets. The contact structure is formed of a contact substrate (20) and a plurality of contactors (30). The contactor has an intermediate portion which is inserted in the through hole provided on the contact substrate in a vertical direction, a contact portion (33) which is connected to the intermediate portion and positioned at one end of the contactor to function as a contact point for electrical connection with a contact target, and a base portion (35) which is provided at other end of the contactor, and a spring portion having a cantilever shape upwardly inclined relative to the surface of the contact substrate and provided between the base portion and the intermediate portion.

WO 02/47209 A1



ACTION