(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
4 February 2010 (04.02.2010)

PCT

(10) International Publication Number
WO 2010/014382 A3

(51) International Patent Classification:
E21B 19/00 (2006.01) *E21B 33/04* (2006.01)
E21B 33/038 (2006.01) *E21B 43/01* (2006.01)

(21) International Application Number:
PCT/US2009/050363

(22) International Filing Date:
13 July 2009 (13.07.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/084,137 28 July 2008 (28.07.2008) US
12/492,821 26 June 2009 (26.06.2009) US

(71) Applicant *(for all designated States except US)*: **VETCO GRAY, INC.** [US/US]; 4424 West Sam Houston Pkwy North, Suite 100, Houston, TX 77041 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **LEONARD, Jerome, T.** [CA/CA]; 8038 Pine Falls Drive, Houston, TX 77095 (US). **LYLE, Rockford, D.** [US/US]; 1711 Camille, Pinehurst, TX 77362 (US). **SHIRANI, Alireza** [US/US]; 11415 Lakewood Cove, Houston, TX 77070 (US).

(74) Agents: **PHILLIPS, Roger, C.** et al.; General Electric Company, Global Patent Operation, PO Box 861, 2 Corporate Drive, Suite 648, Shelton, CT 06484 (US).


(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,

[Continued on next page]

WO 2010/014382 A3

(54) Title: ADJUSTABLE HANGER FOR INNER PRODUCTION RISER

Fig. 1

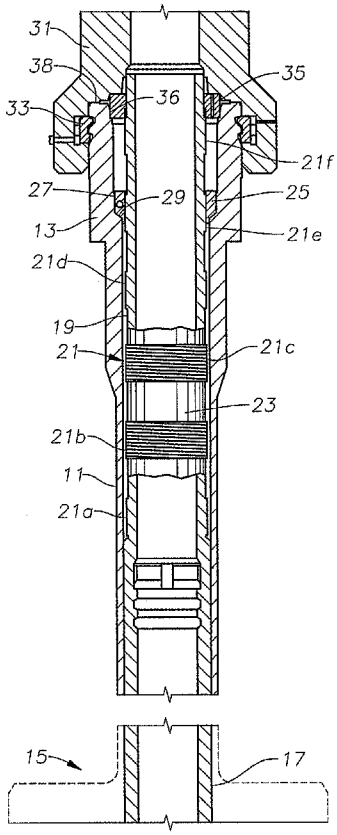

(57) Abstract: A string of conduit extending from a subsea wellhead assembly to a surface wellhead assembly on a platform has a plurality of grooved profiles on an upper portion of the conduit. Each profile is spaced axially from another of the grooved profiles. After a lower end of the conduit is secured to the subsea wellhead assembly, the operator pulls on the conduit to apply a selected tension to the conduit. The operator attaches a support ring to the profile that was closest to and above a load shoulder in the surface wellhead assembly when the desired tension was reached. After landing the support ring on the load shoulder, the operator may cut off any excess portion of the upper portion of the conduit located above the support ring. A seal ring is set between the upper portion of the conduit and the surface wellhead housing.

NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *with international search report (Art. 21(3))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:
1 April 2010