



## (51) International Patent Classification:

**G01N 21/956** (2006.01) **H05K 5/00** (2006.01)  
**G06T 7/00** (2006.01) **H05K 3/06** (2006.01)

## (21) International Application Number:

PCT/NL2012/050934

## (22) International Filing Date:

28 December 2012 (28.12.2012)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

|         |                             |    |
|---------|-----------------------------|----|
| 2008063 | 2 January 2012 (02.01.2012) | NL |
| 2008064 | 2 January 2012 (02.01.2012) | NL |
| 2008065 | 2 January 2012 (02.01.2012) | NL |
| 2008066 | 2 January 2012 (02.01.2012) | NL |
| 2008067 | 2 January 2012 (02.01.2012) | NL |
| 2008068 | 2 January 2012 (02.01.2012) | NL |

(71) **Applicant:** MUTRACX B.V. [NL/NL]; 32, Lagedijk, NL-5705 BZ Helmond (NL).

(72) **Inventors:** ZWIERS, Henk Jan; 14, Straelseweg, NL-5911 CP Venlo (NL). JANSSEN, Jacobus Hendricus Johannes; 13A, Beerseweg, NL-5443 BD Haps (NL). VEERMAN, Joost Anne; 31, Kloosterstraat, NL-5971 BB Grubbenvorst (NL).

(74) **Agents:** HOLLAAR, C. et al.; Exter Polak & Charlouis B.V., Postbus 3241, NL-2280 GE Rijswijk (NL).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) **Title:** INKJETSYSTEM FOR PRINTING A PRINTED CIRCUIT BOARD

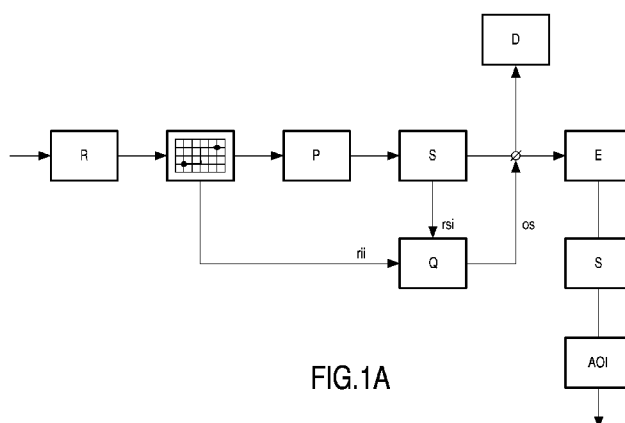


FIG.1A

(57) **Abstract:** A printing process for printing (P) an ink pattern on a substrate is provided. The ink pattern to be printed is based on an available pattern layout (R). The pattern layout defines a desired layout of the ink pattern to be printed. Based on the pattern layout an input image (rii) for allocating dot positions of the ink pattern is generated. The printing process comprises a step of comparing a scan (S) image (rsi) with the input image to carry out a quality inspection (Q) to detect any print defects in the printed ink pattern. The printing process comprises a step of providing a decision (os) on an approval or a rejection of the printed ink pattern. In case of an approval, the substrate can be supplied to a subsequent processing station (E) to finalise the substrate. In case of a rejection, the substrate including print defects can be recycled (D).

