

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
07 January 2021 (07.01.2021)



(10) International Publication Number
WO 2021/001419 A1

(51) International Patent Classification:

B63H 21/21 (2006.01) *G01C 21/20* (2006.01)
B63H 21/22 (2006.01) *B63H 21/14* (2006.01)
F02D 29/02 (2006.01) *F02D 41/14* (2006.01)

(21) International Application Number:

PCT/EP2020/068509

(22) International Filing Date:

01 July 2020 (01.07.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1950839-9 03 July 2019 (03.07.2019) SE

(71) Applicant: **LEAN MARINE SWEDEN AB** [SE/SE]; Säterigatan 29, 417 64 Göteborg (SE).

(72) Inventor: **IDESKOG, Linus**; Lillevälvägen 16, 475 32 Öckerö (SE).

(74) Agent: **KOSSMANN PATENT AB**; Alice Tegnér v 7, 146 38 Tullinge (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: METHOD AND SYSTEM FOR CONTROLLING PROPULSIVE POWER OUTPUT OF SHIP

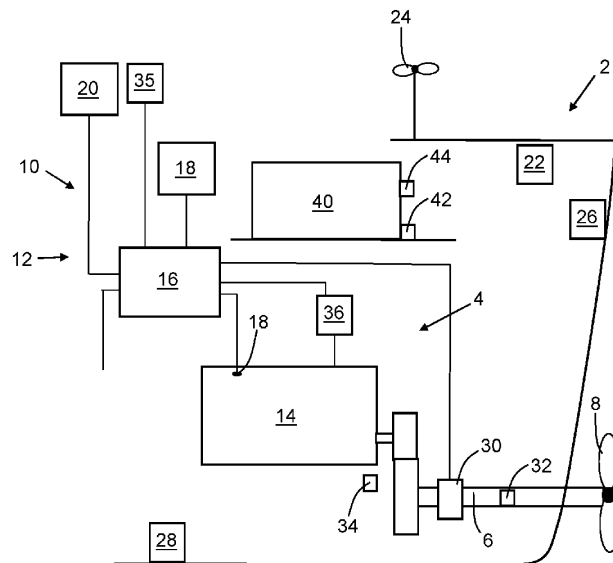


Fig. 2

(57) Abstract: The disclosure concerns a method and a system (10) for controlling a propulsive power output applied to a propeller shaft (6) of a ship (2). The ship comprises the propeller shaft (6) and a propulsive power source (4) connected to the propeller shaft (6). A control signal for producing (102) with the propulsive power source a propulsive power is varied within an interval limited by an upper control limit value and a lower control limit value. If a current value of an operational parameter of the ship reaches a first parameter limit value, the upper control limit value is reduced. Thus, the propulsive power source may be prevented from applying a too high power output to the propeller shaft, which would be unfavourable for the ship.

[Continued on next page]

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*