

(51) International Patent Classification:
G07G 1/00 (2006.01)(21) International Application Number:
PCT/US2015/068277(22) International Filing Date:
31 December 2015 (31.12.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/103,237 14 January 2015 (14.01.2015) US
14/627,958 20 February 2015 (20.02.2015) US

(71) Applicant: SAMSUNG PAY, INC. [US/US]; 3 Van de Graaf Drive, Fourth Floor, Burlington, Massachusetts 01803 (US).

(72) Inventor: WALLNER, George; 17 N. Hibiscus Drive, Miami Beach, Florida 33139 (US).

(74) Agent: MICHAELIS, Brian; Seyfarth Shaw LLP, 2 Seaport Lane, Suite 300, Boston, Massachusetts 02210-2028 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TRANSMITTER AND METHOD FOR SUBSTANTIALLY REDUCING DEAD ZONES IN AN INDUCTIVE CONTACTLESS MOBILE PAYMENT SYSTEM

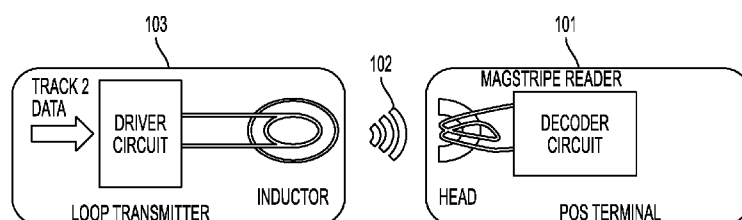


FIG. 1

(57) Abstract: A transmitter to generate a signal to be read by a reader is described. The transmitter includes a driver circuit; and at least two inductors connected to the driver circuit. The driver circuit controls the current flow through the inductor and the current flow results in a signal such that the signal strength is above the detection limit of the reader for each of the inductors which may have at least one null region. Additionally, the inductors are positioned such that the null regions of the inductors do not overlap.

