

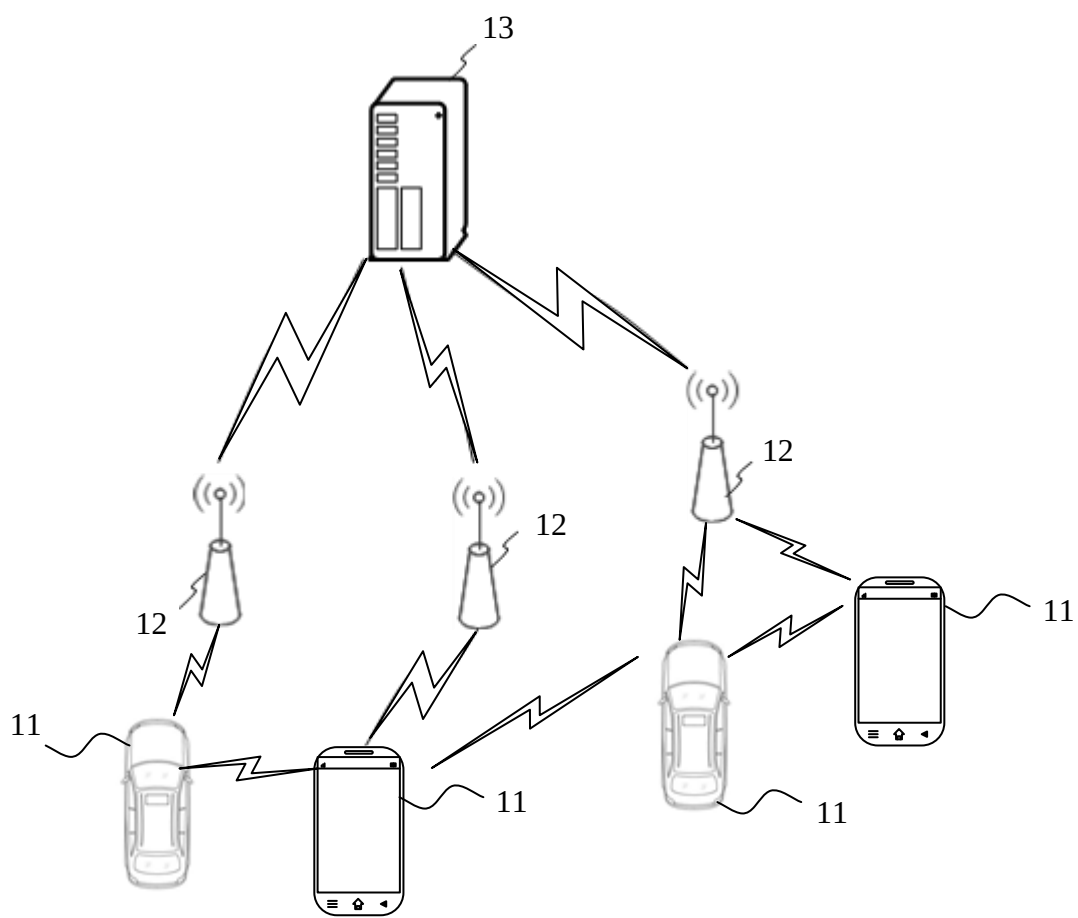


FIG. 1

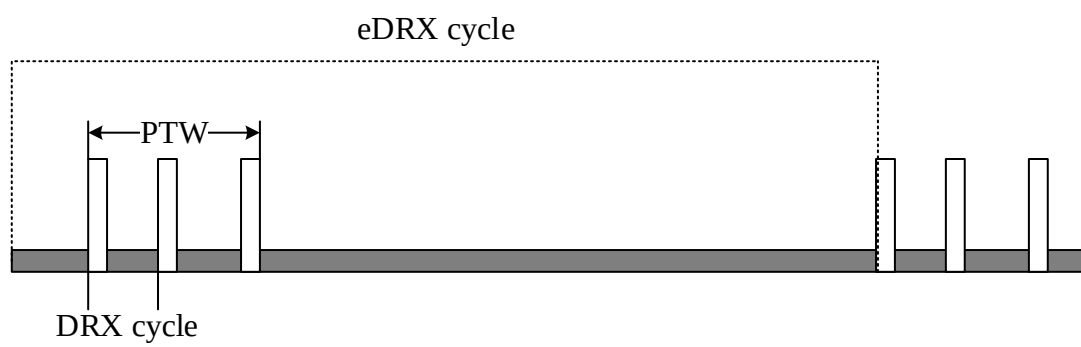


FIG. 2

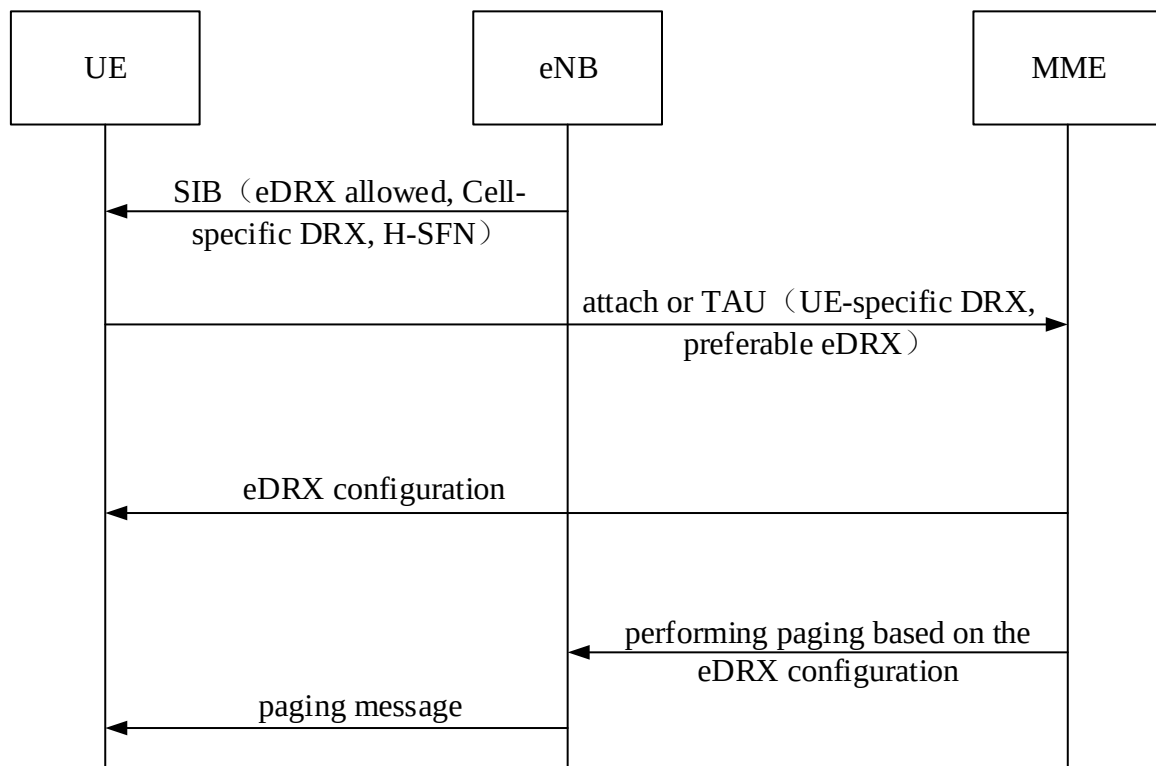


FIG. 3

S110: determining a paging monitoring parameter of an inactive-state UE according to a configuration situation of an inactive-state eDRX parameter and an idle-state eDRX parameter

FIG. 4

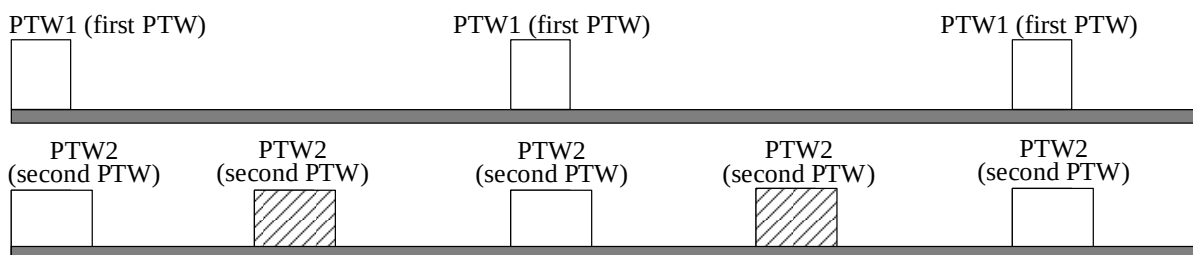


FIG. 5

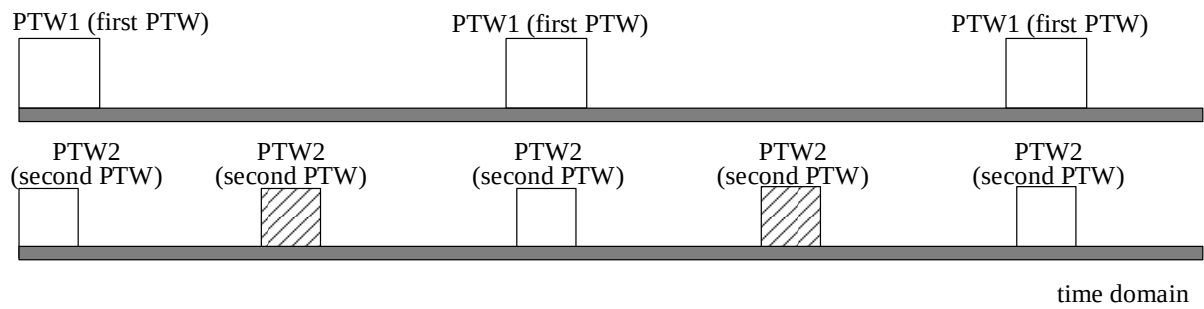


FIG. 6

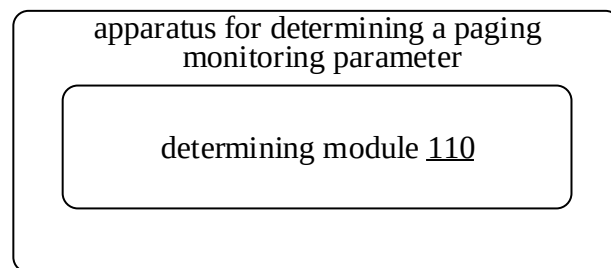


FIG. 7

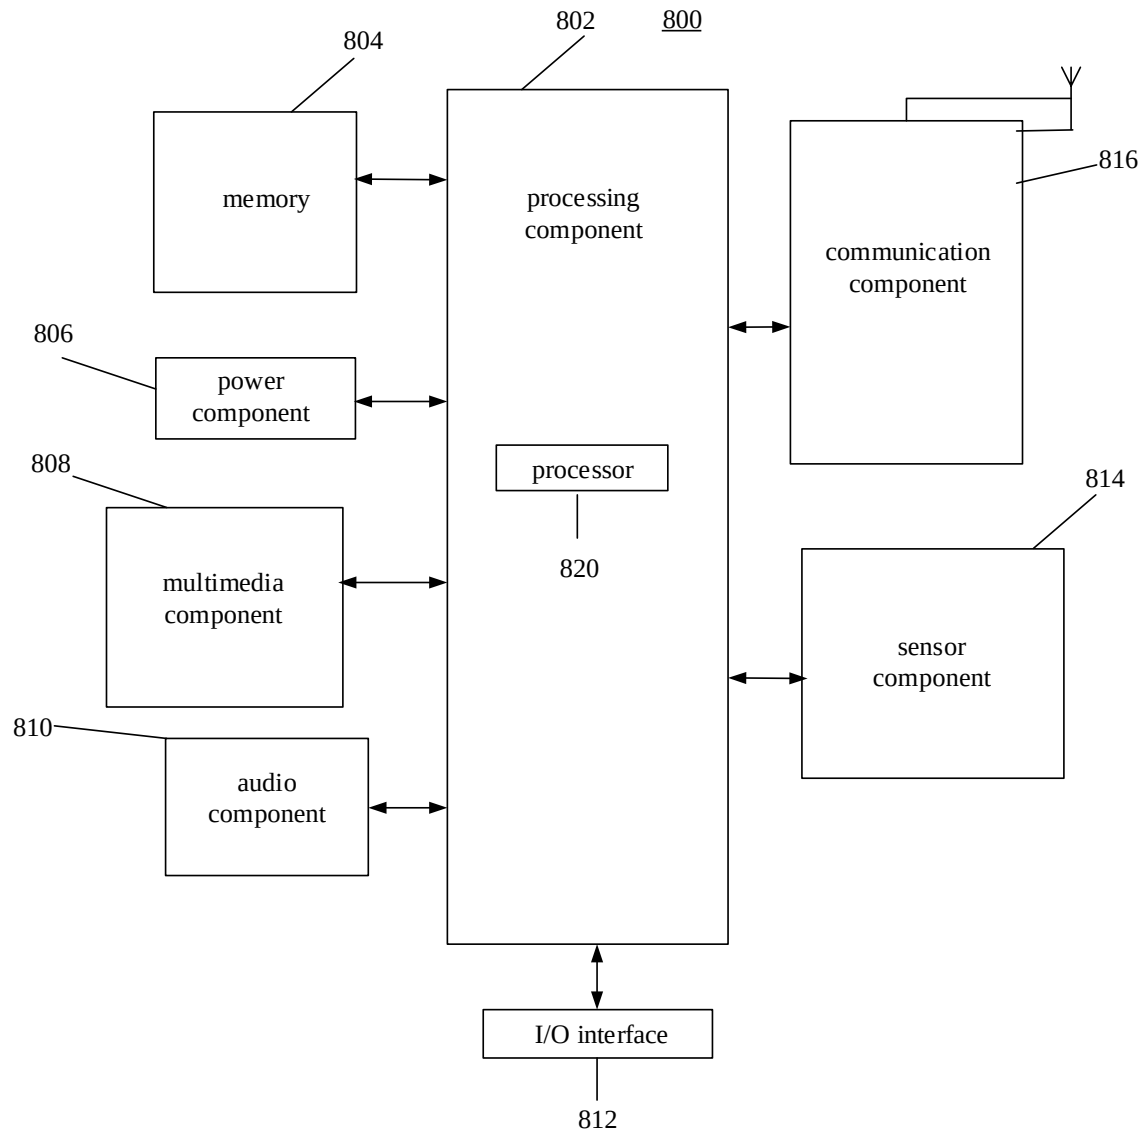


FIG. 8