


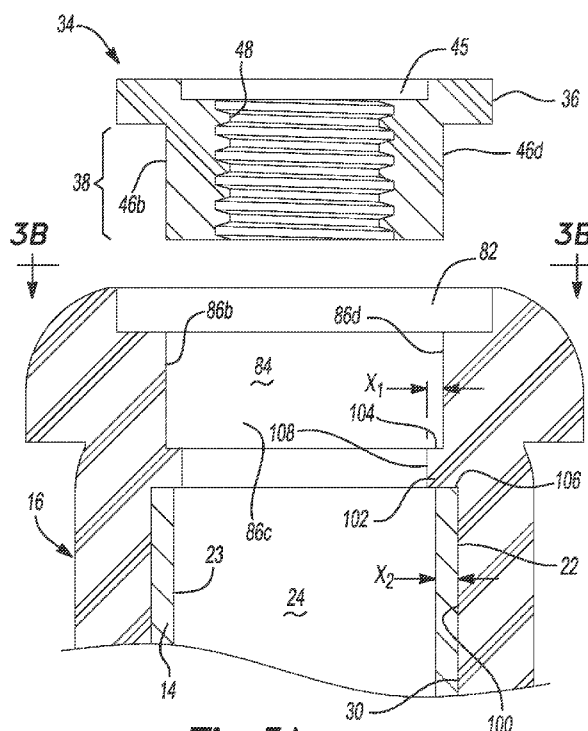

- (51) **International Patent Classification:**
A63B 53/14 (2015.01) *A63B 53/02* (2015.01)
- (21) **International Application Number:**
PCT/US2015/018682
- (22) **International Filing Date:**
4 March 2015 (04.03.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/947,570 4 March 2014 (04.03.2014) US
14/636,289 3 March 2015 (03.03.2015) US
- (71) **Applicant:** SSG INTERNATIONAL, LLC [US/US];
29706 West Tech Drive, Wixom, Michigan 48393 (US).
- (72) **Inventors:** DINGMAN, Dean; 8130 South Shore Drive,
Brighton, Michigan 48114 (US). LEE, Chris; 9-2-201
District No. 29, Kang Ying Garden, Chao Yang District,
9th Bldg., Room 201, Beijing (CN).
- (74) **Agents:** MIERZWA, Kevin G. et al.; Harness, Dickey &
Pierce, P.L.C., P.O. Box 828, Bloomfield Hills, Michigan
48303 (US).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) **Title:** GRIP AND INTERNAL WEIGHT SYSTEM FOR A GOLF CLUB HAVING A STOPPER WITHIN THE GRIP**Fig-3A**

(57) **Abstract:** A golf club grip for a golf club includes an elongated member having a first end, a second end, an inner surface and an outer surface. The first end is configured to receive a golf club shaft. The second end includes an opening that comprises an insert having a first threaded portion therein. The elongated member comprises a stopper extending inward from the inner surface a predetermined distance. The stopper separates the golf club shaft and insert.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with amended claims (Art. 19(1))*
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*