

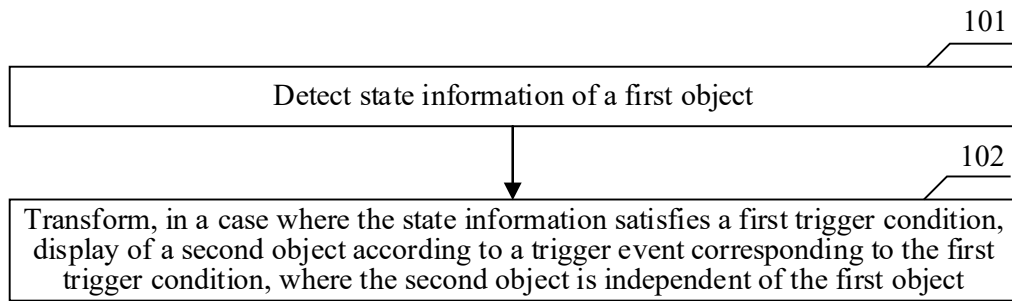


FIG. 1

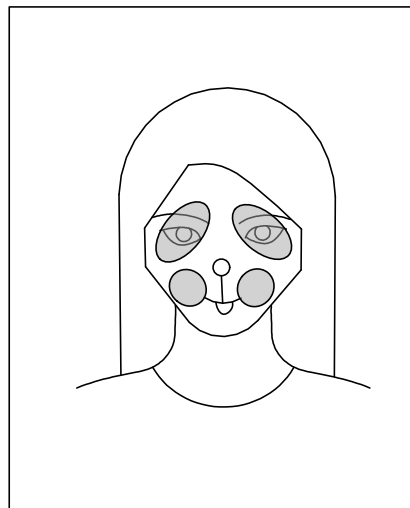


FIG. 2

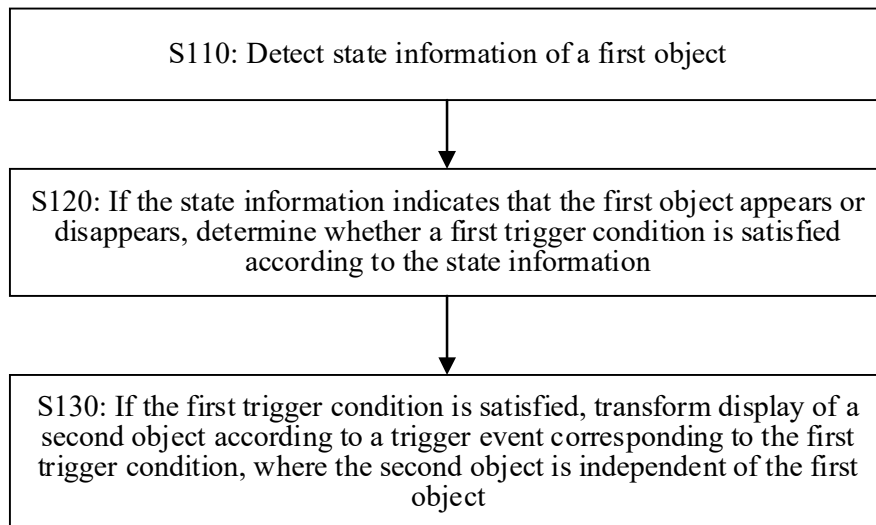


FIG. 3

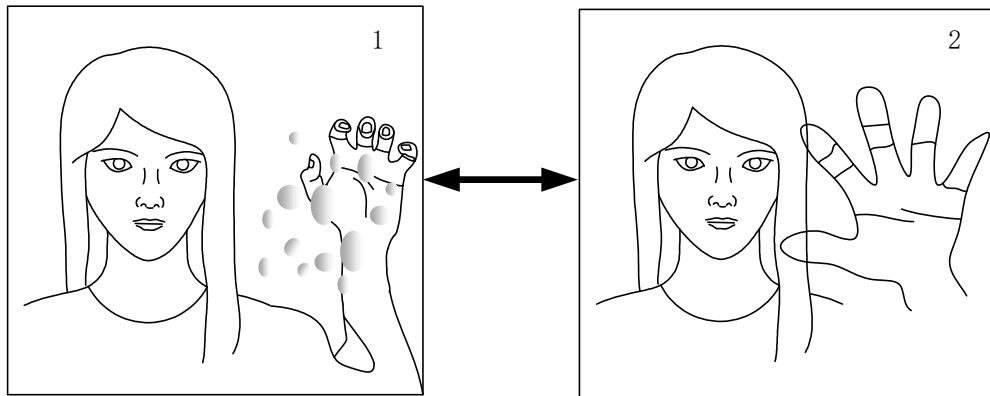


FIG. 4

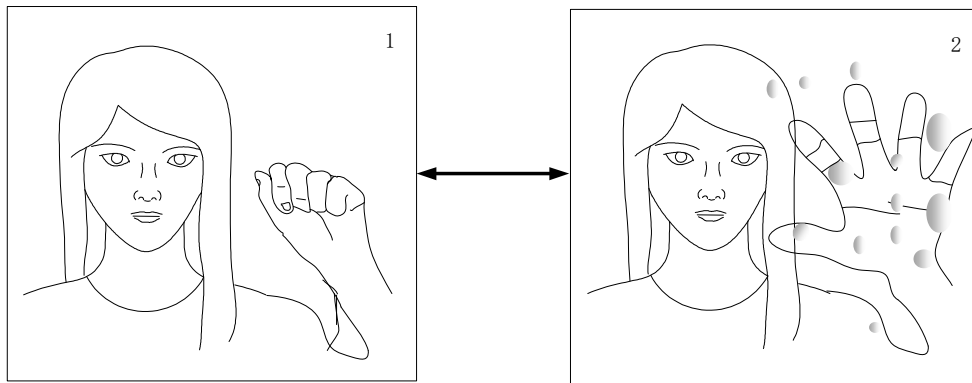


FIG. 5

S201: Detect second display state information of the first object currently displayed on a display interface



S202: If the second display state information indicates that the trigger condition is satisfied, control the display of the second object according to the trigger event corresponding to the trigger condition

FIG. 6

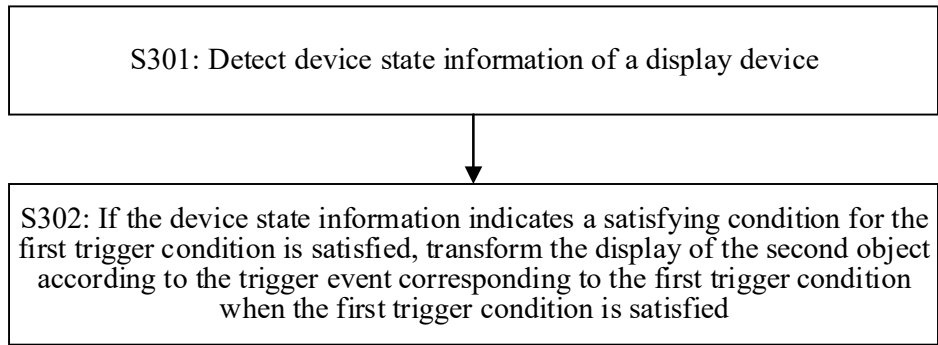


FIG. 7

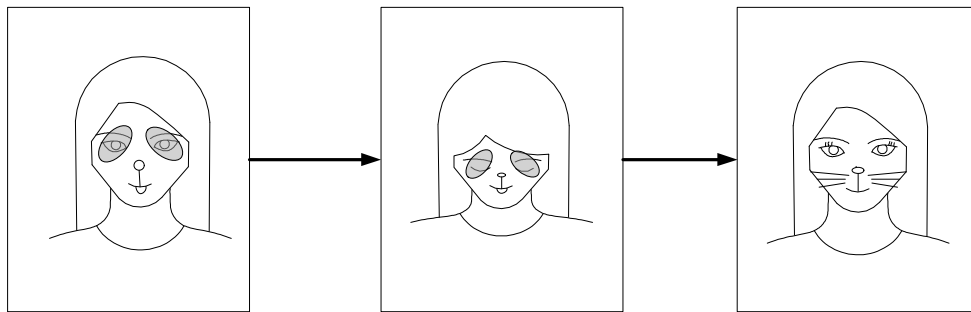


FIG. 8

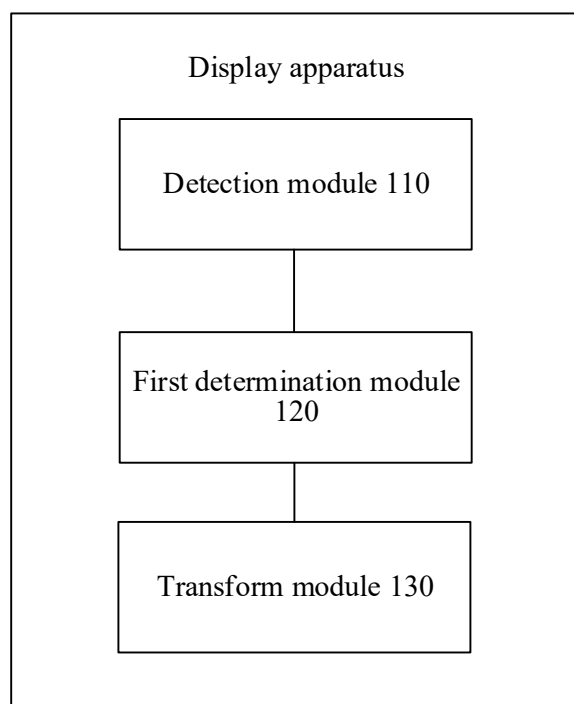


FIG. 9

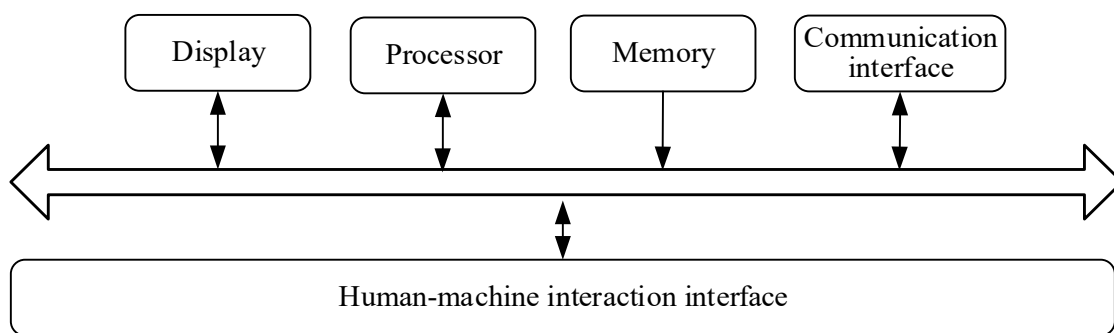


FIG. 10