(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
12 June 2003 (12.06.2003)

PCT

(10) International Publication Number
WO 03/047680 A1

(51) International Patent Classification[7]: A61M 37/00, 35/00, A61B 18/20

(21) International Application Number: PCT/AU02/01643

(22) International Filing Date: 5 December 2002 (05.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PR 9323 5 December 2001 (05.12.2001) AU

(71) Applicant *(for all designated States except US)*: **NORWOOD ABBEY LTD** [AU/AU]; 63 Wells Road, Chelsea Heights, VIC 3196 (AU).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **HYAMS, Michelle** [AU/AU]; 22 McMillan Street, Elsternwick, VIC 3185 (AU).


(74) Agents: **DARK, Andrew** et al.; Davies Collison Cave, 1 Little Collins Street, Melbourne, VIC 3000 (AU).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: APPLICATOR FOR FACILITATING DELIVERY OF A SOLUTION TO A SURFACE

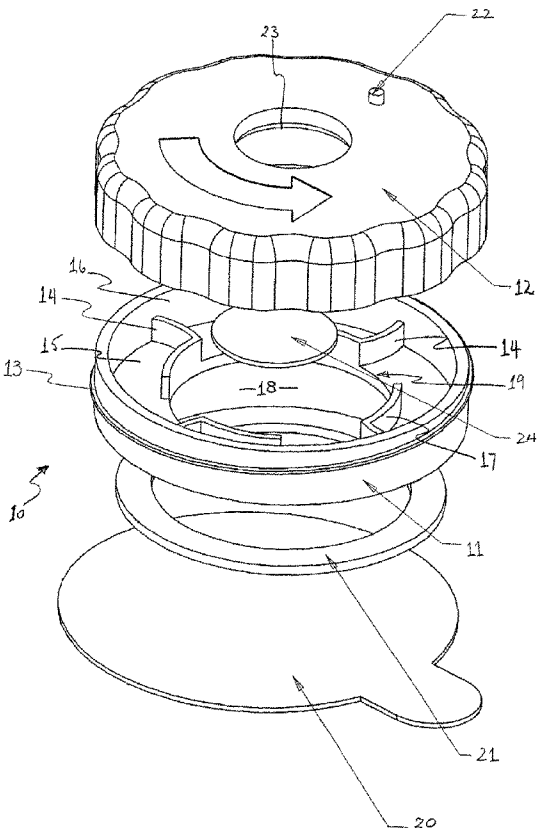

(57) Abstract: A delivery device (10) for facilitating delivery of a solution to a surface, the device including: a receptacle (11, 12) for storage of the solution prior to delivery to the surface, the receptacle being operable between a closed orientation and an open orientation; an abutting face (21) which in use sealingly abuts the surface, the abutting face including an aperture which facilitates delivery of the solution to the surface and which is in fluid communication with the receptacle (11, 12) when the receptacle is in the open orientation; wherein as the receptacle is translated from the closed orientation to the open orientation the solution is released from the receptacle to the aperture of the abutting face while the abutting face (21) is maintained in sealing abutment with the surface.

WO 03/047680 A1

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.