

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 November 2020 (12.11.2020)

WIPO | PCT

(10) International Publication Number
WO 2020/226893 A9

(51) International Patent Classification:

H01L 21/67 (2006.01) H01B 1/16 (2006.01)
H05B 3/62 (2006.01)

(74) Agent: WILLIAMS, Thomas E.; Neal, Gerber & Eisenberg LLP, Two North LaSalle Street, Suite 1700, Chicago, Illinois 60602 (US).

(21) International Application Number:

PCT/US2020/029152

(22) International Filing Date:

21 April 2020 (21.04.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/843,241 03 May 2019 (03.05.2019) US

(71) Applicant: THERM-X OF CALIFORNIA, INC.

[US/US]; 3325 Investment Blvd., Hayward, California 94545 (US).

(72) Inventors: LAL, Annendra; 3325 Investment Blvd., Hayward, California 94545 (US). SANE, Ajit; 3325 Investment Blvd., Hayward, California 94545 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: HIGH TEMPERATURE ALUMINUM NITRIDE HEATER WITH MULTI-ZONE CAPABILITY

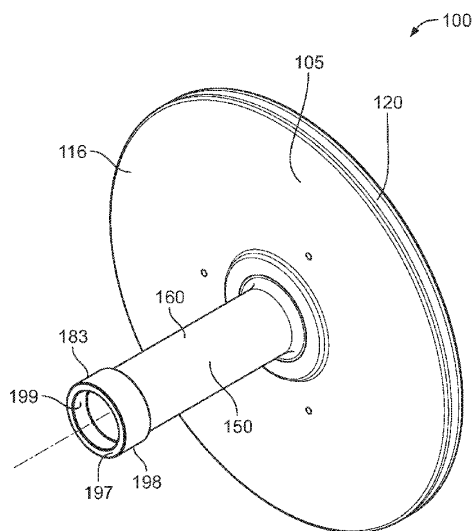


FIG. 1

(57) Abstract: Embodiments of an electric heater apparatus are disclosed. In one embodiment, an electric heater apparatus includes: (a) a first thermally conductive layer comprising an electrically insulating material; (b) one or more electrically conductive heating elements disposed in one or more grooves arranged on the top side of the first thermally conductive layer; and (c) a second thermally conductive layer disposed on the top side of the first thermally conductive layer over the one or more heating elements. The one or more heating elements include one or more refractory hard metals doped with at least one of carbon, nitrogen, aluminum, yttrium, or oxygen. The doped one or more refractory hard metals include a temperature insensitive electrical resistance over operational temperatures ranging from ambient temperature to about 850°C as compared to undoped refractory hard metals. The one or more heating elements are independently controllable to provide one or more heating zones.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(48) Date of publication of this corrected version:

25 February 2021 (25.02.2021)

(15) Information about Correction:

see Notice of 25 February 2021 (25.02.2021)