

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 December 2000 (21.12.2000)

PCT

(10) International Publication Number
WO 00/77323 A1

(51) International Patent Classification⁷: E04G 3/16

(21) International Application Number: PCT/NO99/00386

(22) International Filing Date:
17 December 1999 (17.12.1999)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
19992885 11 June 1999 (11.06.1999) NO

(71) Applicant (for all designated States except US): OBO UT-
STYR AS [NO/NO]; Svaneviksveien 37, N-5063 Bergen
(NO).

(72) Inventor: AALAND, Ove [NO/NO]; Nordre Myrane 42,
N-5300 Kleppstø (NO).

(74) Agent: AS BERGEN PATENTKONTOR; C. Sundtsgt.
36, N-5004 Bergen (NO).


(81) Designated States (national): AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,
DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,
LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,
RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA,
UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— With international search report.

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: ARRANGEMENT OF A WORKING PLATFORM

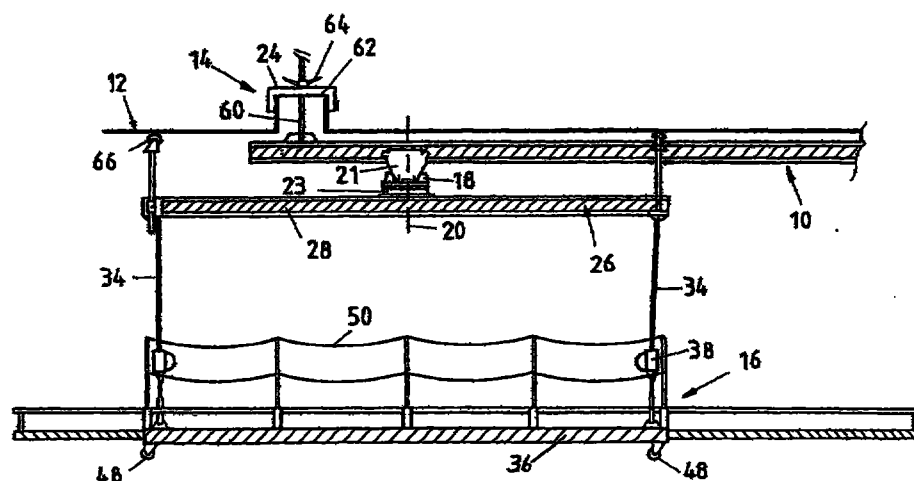

(57) Abstract: Description is given of an arrangement of a working platform (16) which is suspended in a superjacent support construction, such as a ceiling construction, tier of beams or the like, with the working platform (16) being connected to the support construction by being mounted to a yoke construction (26), and that the platform (16) is arranged so that it can be raised or lowered in relation to the yoke construction. The arrangement is characterized in that the yoke construction comprises one or more extendable rods (40, 42, 44, 46), and with a given force can be brought to abut a superjacent support construction (12, 14) to in this way stabilise the relative position of the yoke construction/platform.



WO 00/77323 A1