

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number
WO 01/16987 A1

(51) International Patent Classification⁷: H01H 71/52

(21) International Application Number: PCT/IB00/01219

(22) International Filing Date: 24 August 2000 (24.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/384,148 27 August 1999 (27.08.1999) US

(71) Applicant: EATON CORPORATION [US/US]; Eaton
Center, 111 Superior Avenue, Cleveland, OH 44114 (US).

(72) Inventor: GULA, Lance; 147 Saratoga Drive, Clinton, PA
15026 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,

DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, UZ, VN, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CIRCUIT INTERRUPTER WITH CRADLE HAVING AN IMPROVED PIVOT PIN CONNECTION

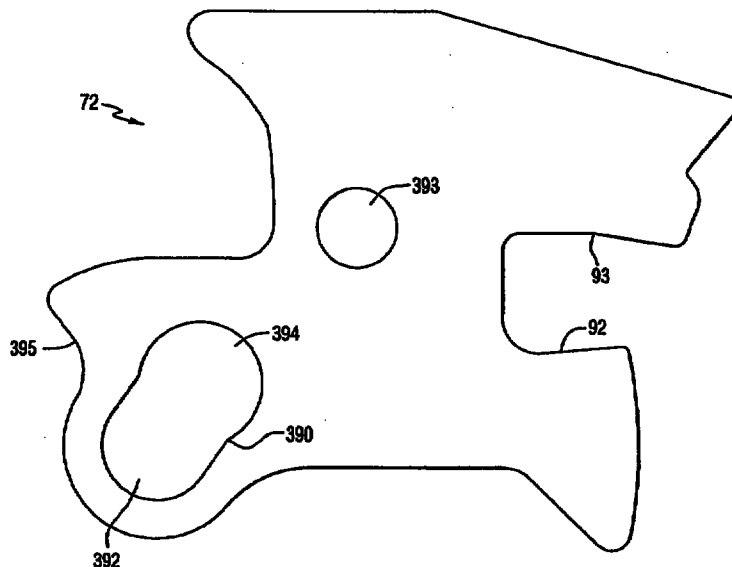

(57) Abstract: A circuit interrupter including a housing, separable main contacts disposed in the housing, and an operating mechanism disposed in the housing and interconnected with the contacts. The operating mechanism includes a cradle for rotating from a first position to a second position in the event of a tripping operation. The cradle has an aperture with a smaller cutout portion and a larger cutout portion. The operating mechanism further includes a pivot pin disposed within the housing. The pivot pin is insertable through the larger cutout portion and is seated in the smaller cutout portion.

WO 01/16987 A1