



- (51) **International Patent Classification:**
H04J 3/06 (2006.01) *G10L 21/04* (2013.01)
- (21) **International Application Number:**
PCT/EP2014/062789
- (22) **International Filing Date:**
18 June 2014 (18.06.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13173159.8 21 June 2013 (21.06.2013) EP
14167061.2 5 May 2014 (05.05.2014) EP
- (71) **Applicant:** FRAUNHOFER-GESELLSCHAFT ZUR FÖRDERUNG DER ANGEWANDTEN FORSCHUNG E.V. [DE/DE]; Hansastraße 27c, 80686 München (DE).
- (72) **Inventors:** REUSCHL, Stefan; Therese-Müller-Str. 24, 90451 Nürnberg (DE). DÖHLA, Stefan; Hartmannstr. 47a, 91052 Erlangen (DE). LECOMTE, Jérémie; Turnstrasse 7, 90763 Fürth (DE). JANDER, Manuel; Liebigstr. 2, 91052 Erlangen (DE).
- (74) **Agents:** BURGER, Markus et al.; Postfach 246, 82043 Pullach (DE).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** JITTER BUFFER CONTROL, AUDIO DECODER, METHOD AND COMPUTER PROGRAM

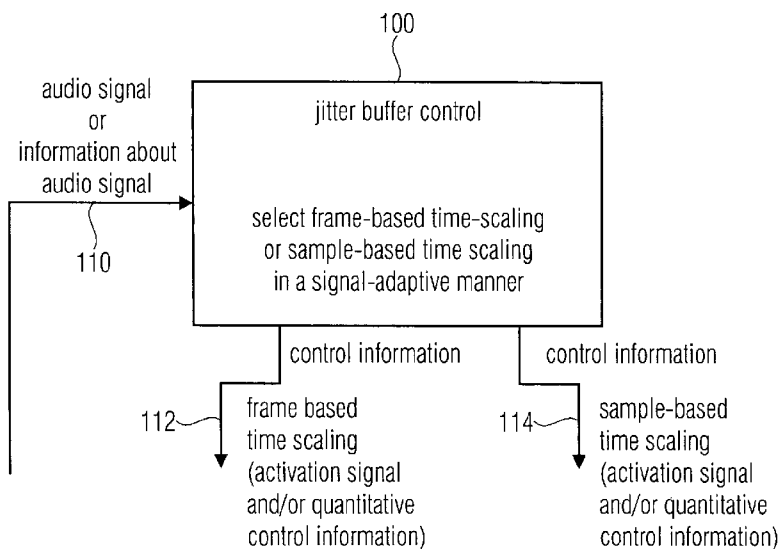


FIG 1

(57) **Abstract:** A jitter buffer control for controlling a provision of a decoded audio content on the basis of an input audio content is configured to select a frame-based time scaling or a sample-based time scaling in a signal-adaptive manner. An audio decoder uses such a jitter buffer control.