(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
18 December 2008 (18.12.2008)

PCT

(10) International Publication Number
WO 2008/154616 A1

(51) International Patent Classification:
A61M 5/50 (2006.01)

(21) International Application Number:
PCT/US2008/066655

(22) International Filing Date: 12 June 2008 (12.06.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/943,397 12 June 2007 (12.06.2007) US

(71) Applicant *(for all designated States except US)*: **BECTON, DICKINSON AND COMPANY** [US/US]; 1 Becton Drive - MC 89, Franklin Lakes, New Jersey 07417-1880 (US).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **CAIZZA, Richard** [US/US]; 1 Cherry Tree Drive, Vernon, New Jersey 07462 (US). **ODELL, Robert** [US/US]; 357 Pulis Avenue, Franklin Lakes, New Jersey 07417 (US).

(74) Agent: **SERVILLA, Scott S.**; Diehl Servilla LLC, 77 Brant Avenue, Suite 210, Clark, New Jersey 07066 (US).


(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

(54) **Title:** SYRINGE WITH DISABLING MECHANISM

FIG. 2

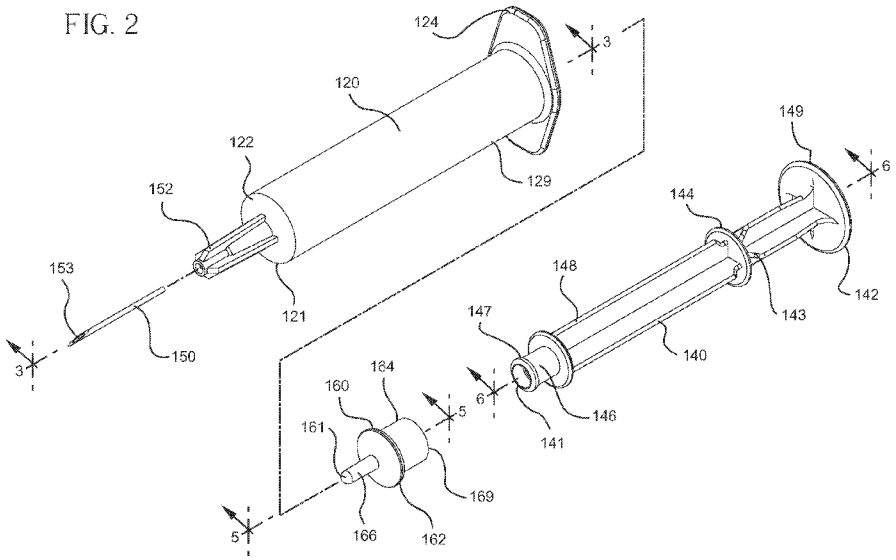

(57) **Abstract:** Syringe assemblies having a passive disabling system to prevent reuse are provided. According to one or more embodiments, the syringe assembly (100) comprises a barrel (120), plunger rod (140) and stopper (160) wherein the plunger rod further comprises a locking protrusion (144) that locks the plunger rod within the barrel. Certain embodiments further include a frangible portion (143) on the plunger rod that breaks when reuse is attempted. One or more embodiments include a plunger rod and stopper attachment that prevents disassembly of the syringe assembly prior to use. Syringe assemblies of one or more embodiments also include visual indicators or markers (300) indicating whether a syringe assembly is used or the plunger rod is locked within the barrel.

WO 2008/154616 A1