(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
5 June 2003 (05.06.2003)

PCT

(10) International Publication Number
WO 03/046489 A1

(51) International Patent Classification[7]: G01F 1/84, G05D 7/06

(21) International Application Number: PCT/US02/37778

(22) International Filing Date:
25 November 2002 (25.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/995,067 26 November 2001 (26.11.2001) US

(71) Applicant *(for all designated States except US)*: **EMERSON ELECTRIC CO.** [US/US]; 8000 W. Florrisant, St. Louis, MO 63136 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **SUND, Wesley, E.** [US/US]; 10973 Purdey Road, Eden Prairie, MN 55347 (US). **DILLE, Joseph, C.** [US/US]; 628 Cowpath Road, Telford, PA 18969 (US). **BARGER, Michael, J.** [US/US]; 596 Beck Road, Sauderton, PA 18964 (US). **PAWLAS, Gary, E.** [US/US]; 546 Hoptree Court, Louisville, CO 80027 (US).

(74) Agent: **GLEASON, Mark, L.**; Howrey Simon Arnold & White, LLP, 750 Bering Drive, Houston, TX 77057-2198 (US).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HIGH PURITY FLUID DELIVERY SYSTEM

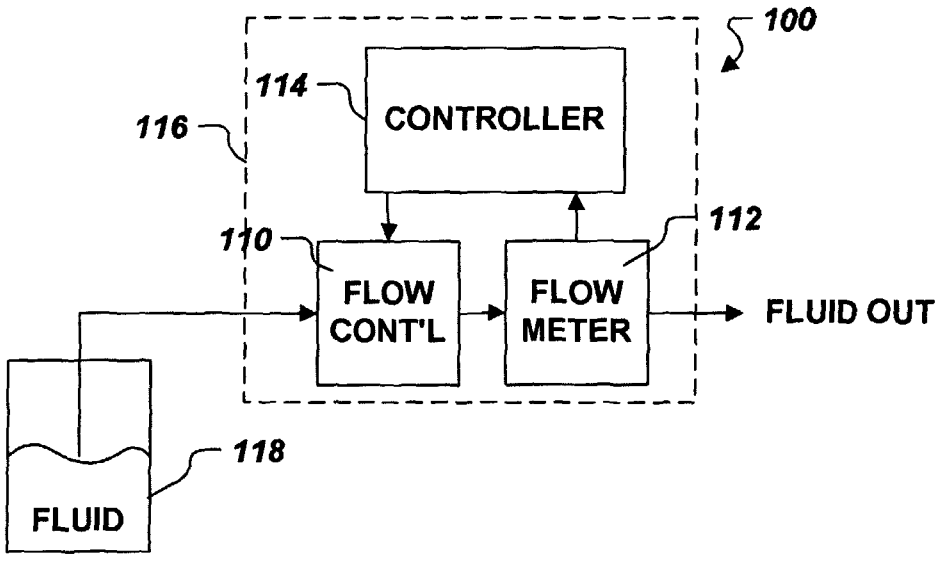

(57) Abstract: A fluid delivery system includes a flow control device and a Coriolis mass flowmeter(112) in fluid communication with the flow control device.(110).The Coriolis flowmeter has a flow-tube made of a high-purity plastic material, such as PFA, making the delivery system suitable for high purity applications. A controller (114)provides a control output signal to the flow control device(110), which may comprise a pinch valve(120), so as to vary the flow control device output in response to a setpoint signal and measurement signals received from the flowmeter.(112).

WO 03/046489 A1

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.