



(51) International Patent Classification:
B65F 5/00 (2006.01) **F24F 7/04** (2006.01)

(21) International Application Number:
PCT/FI2011/050845

(22) International Filing Date:
30 September 2011 (30.09.2011)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20106143 1 November 2010 (01.11.2010) FI

(71) Applicant (for all designated States except US): **MARI-CAP OY** [FI/FI]; Pohjantähdentie 17, FI-01450 Vantaa (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SUNDHOLM, Göran** [FI/FI]; Ilmari Kiannon kuja 3, FI-04310 Tuusula (FI).

(74) Agent: **HEINÄNEN OY**; Äyritie 8 D, FI-01510 Vantaa (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND APPARATUS IN A PNEUMATIC MATERIAL CONVEYING SYSTEM

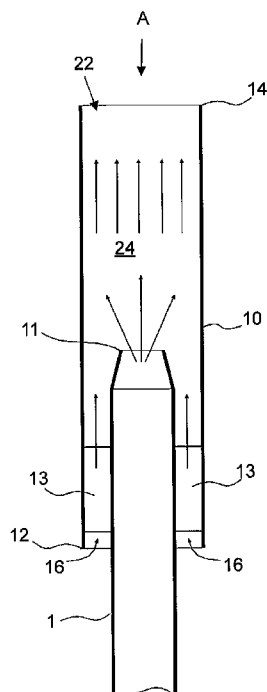


FIG. 1

(57) Abstract: Method for handling outlet air in a pneumatic waste-conveying system, in which the outlet air is at least partly the conveying air to be used in waste conveying. The outlet air is blown from the outward blowing pipe (1) into a chamber (24) comprising at least one output aperture (22) and one second aperture (16, 17), in which second aperture a suction effect is achieved with the blowing of the outlet air such that additional air is brought into the body of outlet air in the chamber via the at least one second aperture (16, 17) as a consequence of the suction effect achieved with the outlet air, and that the outlet air and the additional air mix with each other at least partly in the chamber (24) before the output aperture (22) from which the mixture of outlet air and additional air is conducted away. The invention also relates to an apparatus.



Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*