



(43) International Publication Date
31 October 2013 (31.10.2013)

(51) International Patent Classification:

E06B 3/52 (2006.01) *A47B 31/00* (2006.01)
E05C 19/00 (2006.01) *B64D 11/04* (2006.01)

(21) International Application Number:

PCT/NL2013/050307

(22) International Filing Date:

24 April 2013 (24.04.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2008693 24 April 2012 (24.04.2012) NL

(71) Applicant: **DRIESSEN AIRCRAFT INTERIOR SYSTEMS (EUROPE) B.V.** [NL/NL]; Toermalijnstraat 16, NL-1812 RL Alkmaar (NL).

(72) Inventor: **van Loon, Laurentius Petrus Joseph;** Langeweg 85, NL-1774 AK Slootdorp (NL).

(74) Agent: **DE BOER, Henk;** Nederlandsch Octrooibureau, J.W. Frisolaan 13, NL-2517 JS The Hague (NL).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DEVICE FOR ACCOMMODATING OBJECTS AND TRANSPORTATION MEANS COMPRISING SUCH A DEVICE

Fig 3a

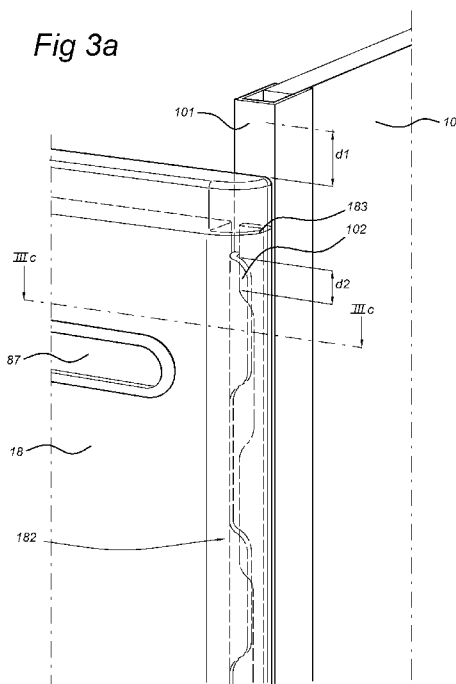

(57) Abstract: The invention relates to device (1) for accommodating objects, in particular for use in an airplane, comprising a housing (5) and a door (18) which is pivotable about a pivot axis (PA) between an open position and a closed position. The door (18) is movable in a direction which extends substantially parallel to the pivot axis (PA) between a locked position and an unlocked position. The door (18) comprises a locking edge (182) and the housing (5) comprises a door post (101), wherein the locking edge (182) engages with the door post (101) in the locked position to lock the door in its closed position and allow movement of the door (18) in the direction which extends substantially parallel to the pivot axis (PA) between the locked and the unlocked position.



Published:

— *with international search report (Art. 21(3))*