

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
31 March 2022 (31.03.2022)



(10) International Publication Number
WO 2022/066552 A1

(51) International Patent Classification:

B65G 47/66 (2006.01) B65G 47/56 (2006.01)
B65G 47/52 (2006.01) B65G 47/68 (2006.01)

(21) International Application Number:

PCT/US2021/051030

(22) International Filing Date:

20 September 2021 (20.09.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/081,410 22 September 2020 (22.09.2020) US

(71) Applicant: **FLEXIBLE STEEL LACING COMPANY**
[US/US]; 2525 Wisconsin Avenue, Downers Grove, Illinois
60515 (US).

(72) Inventor: **PETTINGA, Mark Steven**; 3820 N. Big Spring
Drive SW, Grandville, Michigan 49418 (US).

(74) Agent: **KRATZ, Rudy** et al.; Fitch, Even, Tabin & Flannery LLP, 120 South LaSalle Street, Suite 2100, Chicago, Illinois 60603 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: ROLLER CONVEYOR GAP BLOCKER

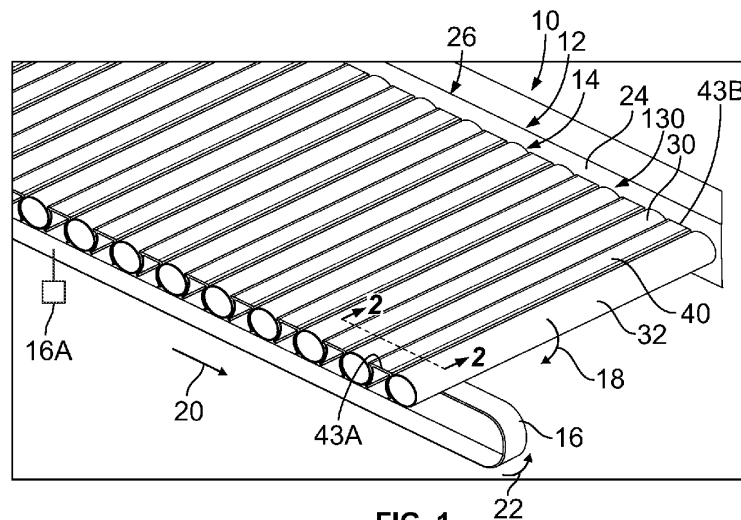


FIG. 1

(57) Abstract: In one aspect, a gap blocker having a body with an upper blocking portion and leg portions of the body connected to the upper blocking portion at longitudinally spaced apart locations. The leg portions of the body have an initial, undeflected configuration with at least one of the leg portions having a first orientation relative to the upper blocking portion. The leg portions of the body have an operating configuration with the body in a gap between rollers wherein the at least one of the leg portions has the first orientation relative to the upper blocking portion. The upper blocking portion has upper contact portions and the leg portions have lower contact portions for contacting the rollers. The body also has outer surface portions intermediate the upper and lower contact portions configured to be in clearance with the rollers.

[Continued on next page]

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*